

Advantech SE Technical Share Document


Date	2020/3/31	Related Product	WebAccess SCADA/WISE PaaS Dashboard	
Category	<input type="checkbox"/> FAQ <input checked="" type="checkbox"/> SOP <input type="checkbox"/> Driver Tech Note			
Abstract	如何使用手機 APP 連入 Local WISE PaaS Dashboard 與 SRP frame			
Keyword	WebAccess SCADA/ WISE PaaS Dashboard			
Related OS	Windows Server 2012 / 2016, Win10			
Revision History				
Date	Version	Author	Reviewer	Description
2020/3/31	V1.0	Simon.Chiu	Nick.Liu	WebAccess 9.0 WP Dashboard 1.3.6.6 Dashboard APP 1.2.3 I.APP 1.2.4

■ **Problem Description & Architecture:**

因應手機 APP 監控需求量大增，做此 SOP 提供，Android 版本與 iOS 版本略有不同，以下圖片皆用 iOS 版本之圖片

■ **Brief Solution - Step by Step:**

請先至 APP store 或是 google play 下載以下兩個 APP，關鍵字請使用 Advantech 搜尋：

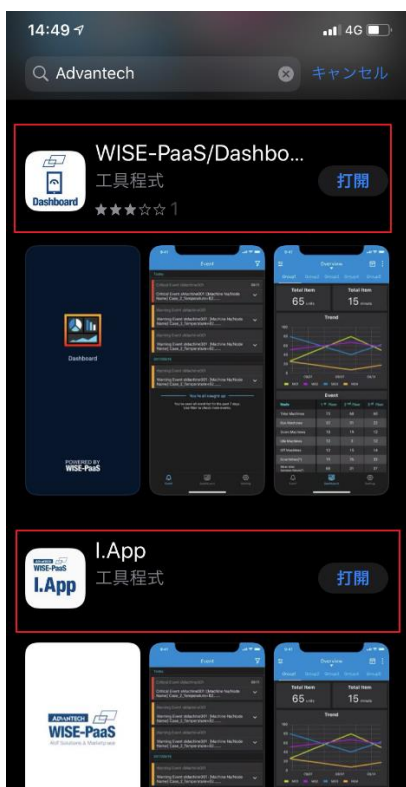

WISE PaaS Dashboard APP: 負責看 Dashboard 之 APP

I.APP: 負責看 SRP frame 之 APP

以下為 Dashboard APP 登入 Local WISE PaaS Dashboard 方式：

1. WISE PaaS Dashboard APP 設定方式：



WISE-PaaS/Dashboard

Standard LDAP

Sign in to Dashboard

WADEMO/admin	Project/account
	password
https://124.9.8.246:3000	https://IP:3000


Remember me

Sign in


2. 若此 Account 只能觀看特定 Dashboard，請詳閱” [\[202003-1\]\[SE_TNC_Local WISE-PaaS Dashboard\]如何在 Local WISE-PaaS Dashboard 建立 User 查看特定 Dashboard](#)”

以下為 I.APP 登入之 APP

1. 請先到 SRP→Manage→選擇已經建立好的 SRP frame→Edit

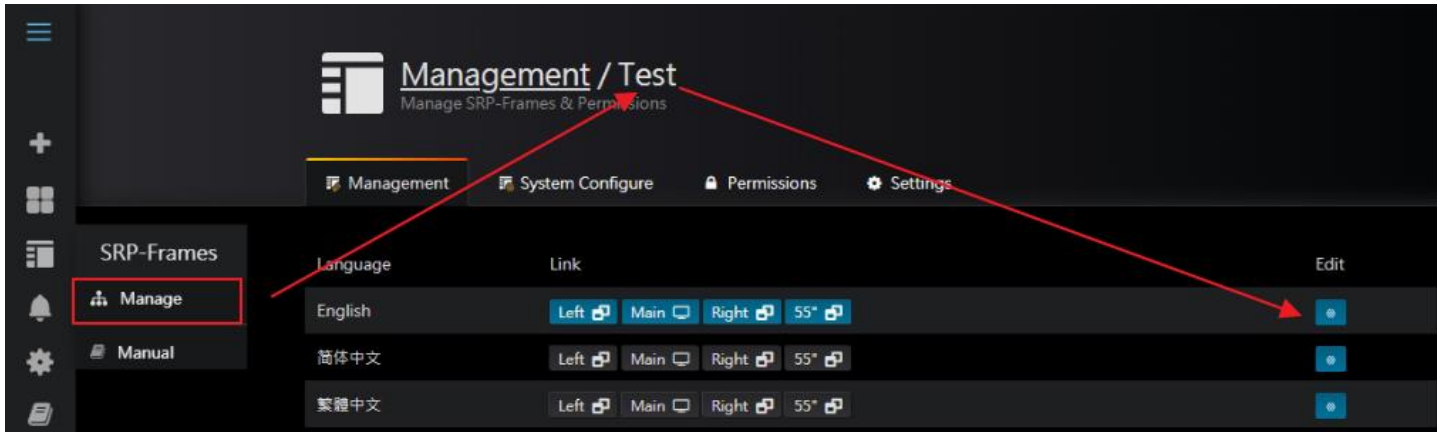

2. Management→Dashboard→URL 應為 https://實體 IP:3000

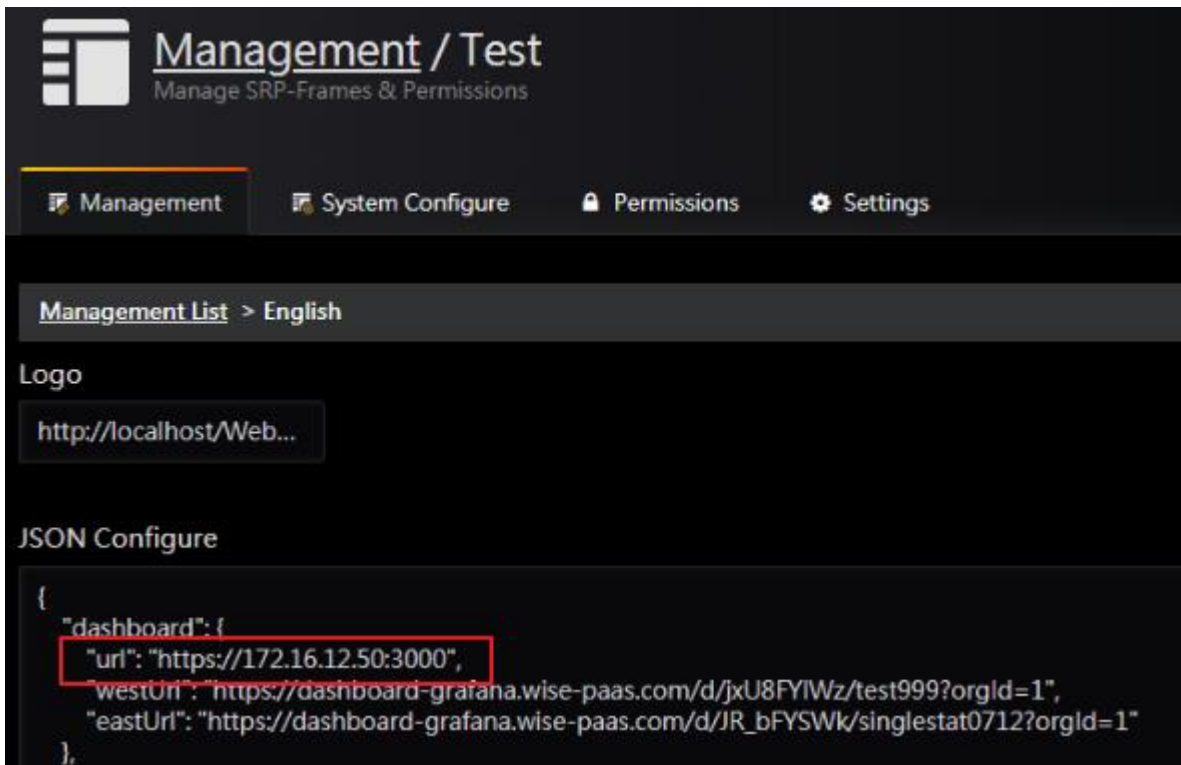

3. 登入畫面請參考以下設定：

Industrial App

Standard
LDAP

Sign in to Dashboard

https://172.16.12.50:3000	https://IP:3000
SRP Name	自定義名稱
Test/admin	Project/account
password	Password


Remember me

Sign in

第二行為自定義名稱，用於 Account List 內，與設定的 SRP name 無關

4. 若有多個 SRP frame，I.APP 會自動記憶上次訪問的最後一個 SRP frame 而自動登入

要切換 SRP frame 請參考下圖位置

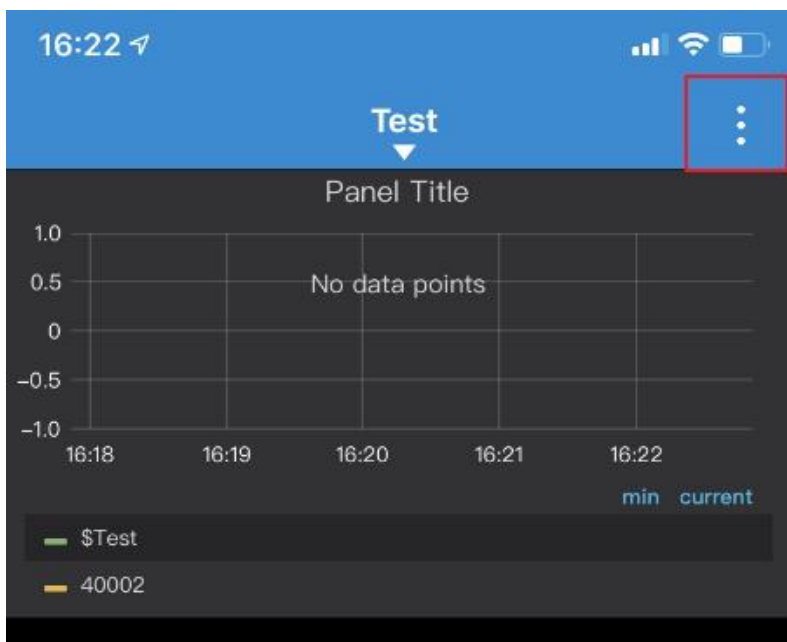

Note:

Dashboard APP 1.2.X 後只能連線 Dashboard 版本 1.3.6.X 之後的版本

■ **Pin Definition (in case of serial connection):**

■ **Reference:**