	DOC NO	:	Rev.
	Issued Date	: 2020/10/08	1/4 0
SOLID STATE STORAGE TECHNOLOGY CORPORATION	Revised Date	:	V1.0

ENGINEERING SPECIFICATIONS

Product Name: CVB-CDXXX (WT) ECH. CORP.

Model	
CVB-CD128	
CVB-CD256	
CVB-CD512	
CVB-CD1024	

		DOC NO :	Rev.
		Issued Date : 2020/10/08	
SOLID STAT	E STORAGE TECHNOLOGY CORPORATION	Revised Date :	V1.0
Version History			Date
0.1	Draft		2020/07/20
1.0	First release		2020/10/08
	0		
	SOLIN		
	~~~		
	SOLID STATE STOR Confiden		
	"STOP		
	Conc	UL TEA	
		SCH A	
			P

DOC NO	:	Rev.
Issued Date	: 2020/10/08	
Revised Date	:	V1.0

## **Copyright 2020 SOLID STATE STORAGE TECHNOLOGY CORPORATION**

## Disclaimer

The information in this document is subject to change without prior notice in order to improve reliability, design, and function and does not represent a commitment on the part of the manufacturer. In no event will the manufacturer be liable for direct, indirect, special, incidental, or consequential damages arising out of the use or inability to use the product or documentation, even if advised of the possibility of such damages.

This document contains proprietary information protected by copyright.

All rights are reserved. No part of this datasheet may be reproduced by any mechanical, electronic, or other means in any form without prior written permission of SOLID STATE STORAGE Technology Corporation.

DOC NO	:	Rev.
Issued Date	: 2020/10/08	
Revised Date	:	V1.0

## Solid State Storage Technology Corporation Table of Contents

ble of	Contents
1	Introduction5
1.1	Overview
1.2	Product Specification
1.3	Functional Block Diagram
1.4	Mechanical Drawing
1.5	Architecture
1.6	Hot Plug Support
1.7	DEVSLP power mode
2	Pin Locations and Signal Descriptions14
2.1	Pin Locations
2.2	Signal Descriptions
3	ATA Command Sets16
3.1	ATA Command
3.2	Power Management Command Set
3.3	Security Mode Feature Set
3.4	SMART Command Set
3.5	Host Protected Area Command Set 21
3.6	48-Bit Address Command Set
3.7	Device Configuration Overlay Command Set
3.8	General Purpose log Command Set
4	SATA Command Sets
4.1	SATA Command
5	References
6	Terms and Acronyms24

DOC NO	:	Rev.
Issued Date	: 2020/10/08	
Revised Date	:	V1.0

## **1** INTRODUCTION

SOLID STATE STORAGE TECHNOLOGY CORPORATION

## 1.1 Overview

The CVB-CDXXX 3D TLC 2.5" SATA 6 Gb/s Solid State Drive (SSD) delivers leading performance in an industry standard 2.5" form factor while simultaneously improving system responsiveness for mobile applications over standard rotating drive media or hard disk drives. By combining leading NAND flash memory technology with our innovative high performance firmware, SOLID STATE STORAGE delivers a SSD for native Serial Advanced Technology Attachment (SATA) hard disk drive drop-in replacement with enhanced performance, reliability, ruggedness and power savings. Since there are no rotating platters, moving heads, fragile actuators, or unnecessary delays due to spin-up time or positional seek time that can slow down the storage subsystem, significant I/O and throughput performance improvement is achieved as compared to rotating media or hard disk drives. This document describes the specifications of the CVB-CDXXX 3D TLC 2.5" SATA 6 Gb/s SSD in 2.5" form factors.

The CVB-CDXXX 3D TLC 2.5" SATA 6 Gb/s SSD primarily targets SATA based servers, fan less laptop PCs, highly rugged mobile client devices, as well as thin and light mini/sub-notebooks. Key attributes include high performance, low power, increased system responsiveness, high reliability, and enhanced ruggedness as compared to standard mobile SATA hard drives. The CVB-CDXXX 3D TLC 2.5" SATA 6 Gb/s SSD is available in a 2.5" form factor that is electrically, mechanically, and software compatible with existing 2.5" Serial ATA slots and cables. Our flexible design allows interchangeability with existing mobile hard drives based on the SATA interface standard. GE TECH, CORP.

## **1.2 Product Specification**

1.2.1. Form Factor: 2.5" SSD form factor

### 1.2.2. Capacity:

	Unformatted	Total user addressable	
Model	capacity	sectors in LBA mode	
CVB-CD128	128GB	250,069,680	
CVB-CD256	256GB	500,118,192	
CVB-CD512	512GB	1,000,215,216	
CVB-CD1024	1024GB	2,000,409,264	

Table 1 User Addressable Sectors

#### Notes:

1.1GB=1,000,000,000 bytes and not all of the memory can be used for storage. 2.1 Sector = 512 bytes

1.2.3. Flash: 3D Multi-Level Cell (TLC) component with NVDDR-Mode

DOC NO	:	Rev.
Issued Date	: 2020/10/08	
Revised Date	:	V1.0

#### 1.2.4. Band Performance

#### Table 2 Maximum Sustained Read and Write Bandwidth

Capacity	Access Type	MB/s
	Sequential Read	Up to 450
128GB	Sequential Write	Up to 360
	Sequential Read	Up to 550
256GB	Sequential Write	Up to 440
	Sequential Read	Up to 550
512GB	Sequential Write	Up to 500
1024GB	Sequential Read	Up to 550
	Sequential Write	Up to 500

## Notes:

1.Performance measured using CrystalDiskMark 7.0.0

2.1 MB/sec = 1,048,576 bytes/sec is used in measuring sequential performance.

If 1 MB/sec = 1,000,000 bytes/sec is used, performance values become 4.85% higher.

3.Test platform: ASUS Z370 PRO (Windows 10 x64)

4.Test by secondary drive (data drive) under SATA 6Gb/s.

5. Actual performance may vary depending on use conditions and environment.

6.Room temperature is 25 °C

#### 1.2.5. Read and Write IOPS (IOMETER)

#### Table 3 Random Read/Write Input/Output Operations per Second

Capacity	Access Type	IOPS
	4K Random Read	38,000
128GB	4K Random Write	32,000
	4K Random Read	50,000
256GB	4K Random Write	60,000
	4K Random Read	50,000
512GB	4K Random Write	60,000
	4K Random Read	60,000
1024GB	4K Random Write	70,000

#### Notes:

1.Performance measured using IOMETER with queue depth set to 32,

2. Write cache enabled.

3.Test platform: ASUS Z370 PRO (Windows 10 x64)

4. Test by secondary drive (data drive) under SATA 6Gb/s.

5. Actual performance may vary depending on use conditions and environment.

DOC NO	:	Rev.
Issued Date	: 2020/10/08	
Revised Date	:	V1.0

6.Room temperature is 25  $\,^\circ C$ 

#### 1.2.6. Ready Time

#### **Table 4 Latency Specifications**

Туре	Average Latency	
Power on to Ready	500ms	
Resume from DEVSLP	100ms	

#### Notes:

1. Device measured form power-on to ready to receive first Media command.

- 2. Power On To Ready time assumes drive have normal shutdown process which have
- STANDBY IMMEDIATE command. Time varies and 90% within 10 seconds if shutdown is not preceded by STANDBY IMMEDIATE command.

#### 1.2.7. Power Management

-- SATA interface power management

#### 1.2.8. Power Consumption

#### Table 5 Operating Voltage Capacity Description Min Max Unit 5.25 128GB Operating voltage for 5V (+/- 5%) 4.75 V 256GB Operating voltage for 5V (+/- 5%) 4.75 5.25 V 512GB Operating voltage for 5V (+/- 5%) 4.75 5.25 V 1024GB Operating voltage for 5V (+/- 5%) 4.75 5.25 V

#### Table 6 Power Consumption (MobileMark)

Capacity	Mode	Max	Unit	
128GB	DIPM Enable	0.5	w	
256GB	DIPM Enable	0.5	W	
512GB	DIPM Enable	0.5	w	
1024GB	DIPM Enable	0.5	w	

DOC NO	:	Rev.
Issued Date	: 2020/10/08	
Revised Date	:	V1.0

#### Table 7 DEVSLP Mode Power Consumption

Capacity	Mode	Max	Unit
128GB	DEVSLP	5	mW
256GB	DEVSLP	5	mW
512GB	DEVSLP	5	mW
1024GB	DEVSLP	5	mW

#### 1.2.9. Temperature

Table 8 Temperature	<b>Relative Specifications</b>
---------------------	--------------------------------

Environment	Mode	Min	Max	Unit
Ambient	Operating	-25	85	°C
Temperature	Non-operating	-40	85	°C
	Operation	5	95	%
Humidity	Non-operation	5	95	%
Note: Measured wit tibility	hout condensation	IG	TE	CH
A Revision 3.0 complia	ant	[]2]		
ompatible with SATA 1	.5Gb/s, 3.0Gb/s & 6.0	Gb/s inte	rface rat	es

#### 1.2.10. Compatibility

-- SATA Revision 3.0 compliant

- -- ATA/ATAPI- 8 compliant
- -- SSD enhanced SMART ATA feature set
- -- Native Command Queuing (NCQ) command set
- -- TRIM supported

DOC NO	:	Rev.
Issued Date	: 2020/10/08	
Revised Date	:	V1.0

Table 9 Device Certifications		
Certification	Description	
CE compliant	Indicates conformity with the essential health and safety requirements set out in European Directives Low voltage Directive and EMC Directive	
UL certified	Underwriters Laboratories, Inc. Component Recognition UL60950-1	
BSMI	Compliance to the Taiwan EMC standard "Limits and methods of Radio Disturbance Characteristics of Information Technology Equipment, CNS 13438 Class B"	
Microsoft WHQL	Microsoft Windows Hardware Quality Labs	
RoHS compliant	Restriction of Hazardous Substance Directive	

#### 1.2.12. Reliability

#### Table 10 Reliability specifications

Parameter	Value	
Mean Time between Failure (MTBF)	> 1,500,000 hours	
Power on/off cycles	50000 cycles	

#### Notes:

1.MTBF is calculated based on a Part Stress Analysis. It assumes nominal voltage. With all other parameters within specified range.

2.Power on/off cycles is defined as power being removed from the drive, and the restored. Most host systems remove power from the drive when entering suspend and hibernate as well as on a system shutdown.

DOC NO	:	Rev.
Issued Date	: 2020/10/08	
Revised Date	:	V1.0

#### 1.2.13. Shock and Vibration

#### **Table 11 Shock and Vibration**

Item	Mode	Timing/Frequency	Max
Shock	Non-operating	At 0.5 msec half-sine	1500G
Vibration	Non-operation	2~500 Hz	3.1Grms

#### Notes:

- 1.Shock specifications assume that the SSD is mounted securely with the input vibration applied to the drive mounting screws. Stimulus may be applied in the X, Y or Z axis
- 2.Vibration specifications assume that the SSD is mounted securely with the input vibration applied to the drive mounting screws. Stimulus may be applied in the X, Y or Z axis. The measured specification is in root mean squared form.

#### 1.2.14. Electromagnetic Immunity


Electromagnetic Immunity tests assume the SSD is properly installed in the representative host system. The drive operates properly without errors degradation in performance when subjected to radio frequency (RF) environments defined in the following table.


Test	Description	Performanc criteria	Reference standard
Electrostatic discharge	Contact ±4KV Air: ±8KV	A	IEC 61000-4-2:2008
Electrostatic discharge	Contact ±6KV Air: ±12KV	В	LEC 61000-4-2:2008
Electrostatic discharge	Contact ±8KV Air: ±15KV	С	IEC 61000-4-2:2008
Radiated RF immunity	80~1000MHz, 3V/m, 80% AM ith 1 KHz sine 900 MHz, 3 V/m, 50% pulse odulation at 200Hz	<b>7</b> A	IEC 61000-4-3:2008
Electrical fast transient	±1KV on AC mains ±0.5KV on ternal I/O	В	IEC 61000-4-4:2004 +Corr.1:2006 +Corr.2:2007
Surge immunity	±1KV differential ±2KV common, C mains	В	IEC 61000-4-5:2005
Conducted RF immunity	150KHz~80 MHz, 3 Vrms, 80% M with 1KHz sine	А	IEC 61000-4-6:2008
Power frequency agnetic field	50Hz, 1A/m (r.m.s.)	А	IEC 61000-4-6:2008

#### Table 12 Radio Frequency Specifications

#### Notes:

- 1.Performance criterion A = The device shall continue to operate as intended, i.e., normal unit operation with no degradation of performance.
- 2.Performance criterion B = The device shall continue to operate as intended after completion of test, however, during the test, some degradation of performance is allowed as long as there is no data loss operator intervention to restore device function.
- 3.Performance criterion C = Temporary loss of function is allowed. Operator intervention is acceptable to restore device function.
- 4. Contact electrostatic discharge is applied to drive enclosure.

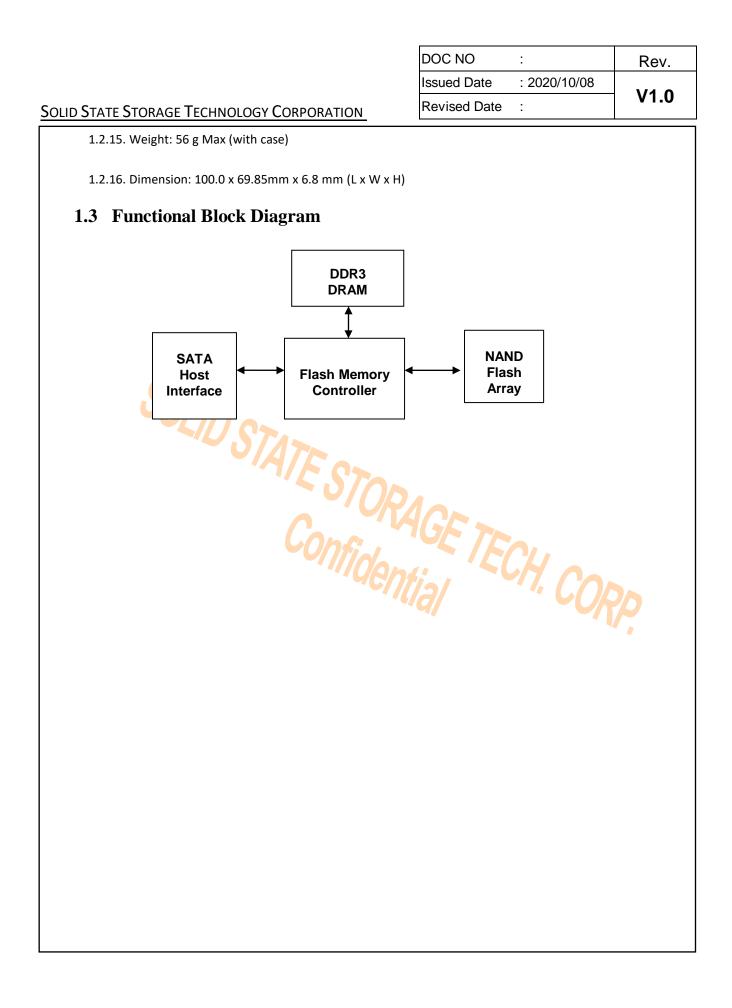

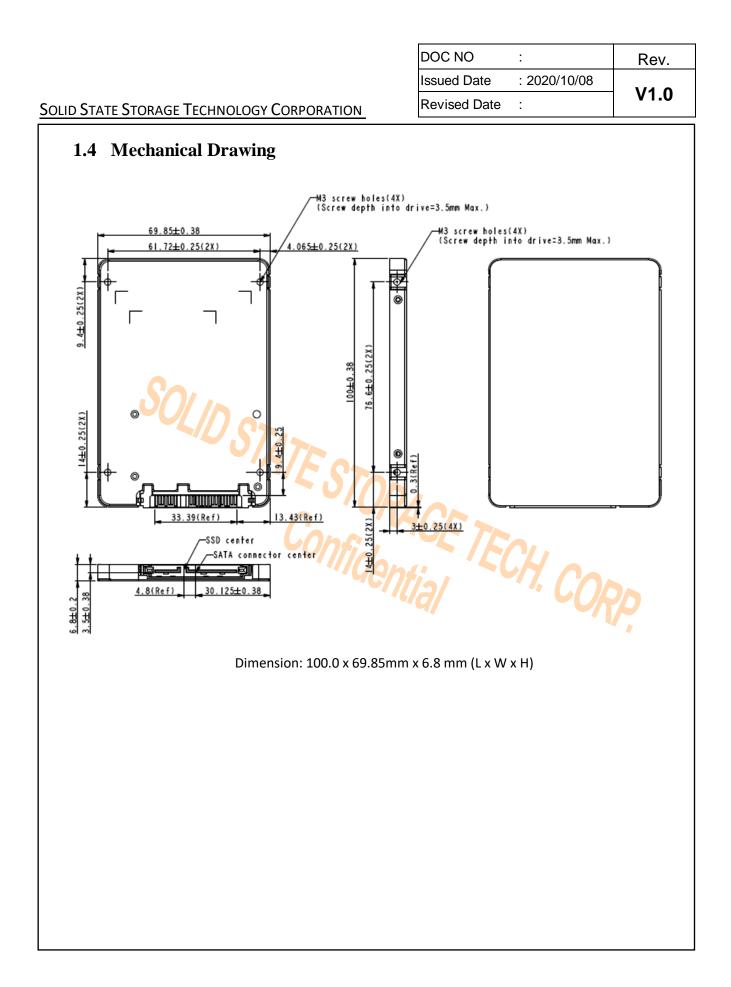

DOC NO	:	Rev.
Issued Date	: 2020/10/08	
Revised Date	:	V1.0

## 1.5 Architecture

The **CVB-CDXXX 3D TLC** SATA 6Gb/s Solid State Drive (SSD) utilizes a cost effective system-on-chip (SoC) design to provide a full 6Gb/s bandwidth with the host while managing multiple flash memory devices on multiple channels internally.

## **1.6 DEVSLP power mode**

SOLID STATE STORAGE SSD support DEVSLP power mode. After power up, and enabled by a SET FEATURES command from the host, device will enter DEVSLP mode from any state after receive HW DEVSLP signal pin trigger. And return to Reset state after HW DEVSLP signal pin negated.

## 1.7 Hot Plug Support


Hot Plug insertion and removal are supported when the correct connector and an appropriate operating system (OS) are used as described in the SATA 3.0 Specification. This product supports asynchronous signal recovery and will establish communications with a host system without hardware device detection by issuing an unsolicited COMINIT when first mated with a powered connector.

DOC NO	:	Rev.
Issued Date	: 2020/10/08	
Revised Date	:	V1.0

## **2** PIN LOCATIONS AND SIGNAL DESCRIPTIONS

## 2.1 Pin Locations

The data and power connector pin locations of the CVB-CDXXX 3D TLC SATA 6 Gb/s SSD are as shown below.

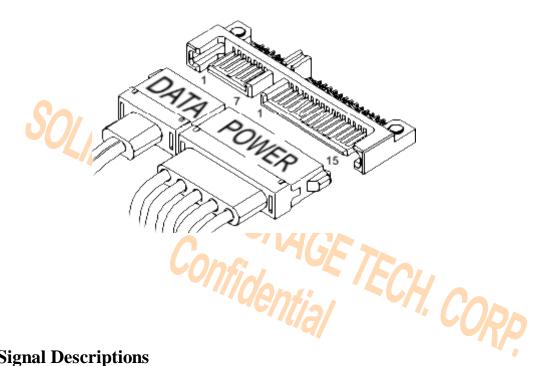

## 2.2 Signal Descriptions

#### **Data Connector:**

#### **Table 13 Serial ATA Data Connector Pin Definitions**

Name	Туре	Description
S1	GND	
S2	A+	Differential Signal Pair A
S3	A-	
S4	GND	
S5	В-	Differential Signal Dair D
S6	B+	Differential Signal Pair B
S7	GND	

DOC NO	:	Rev.
Issued Date	: 2020/10/08	V4 0
Revised Date	:	V1.0

NameTypP1RetirP2Retir	e Description
DO Potir	ed No Use
PZ Retil	ed No Use
P3 Device Slee	If system didn't support DEVSLP, set DEVSLP Sleep Signal pin power high and keep (from power on), device will ignore. If system support DEVSLP, set DEVSLP Sleep Signal pin power low (from power on) device, device will support DEVSLP function. Device Sleep Signal H: SSD enter sleep model. Device Sleep Signal L: SSD exit sleep model.
P4 GNI	
P5 GNI	D
P6 GNI	)
P7 V5	5V Power, Pre-change
P8 V5	5V Power
P9 V5	5V Power
P10 GN	
P11 DAS	S Device Activity Signal
P12 GN	
P13 V12	No Use
P14 V12	2 No Use
P15 V12	2 No Use
Note:	

- The ground pins P4-P6, P10, P12 and the 5V power pin P7
- The signal pins and the rest of the 5V power pins P8-P9
- 3. Ground connectors P4 and P12 may contact before the other 1st mate pins in both the power and signal connectors to discharge ESD in a suitably configured backplane connector.
- 4. Power pins P7, P8 and P9 are internally connected to one another within the device.
- 5. The host may ground P11 if it is not used for Device Activity Signal (DAS)
- 6. Pins P13, P14, P15 are connected together, although they are not connected internally to the device.

DOC NO	:	Rev.
Issued Date	: 2020/10/08	
Revised Date	:	V1.0

## **3 ATA COMMAND SETS**

## 3.1 ATA Command

The SSD supports all the mandatory ATA commands defined in the ATA/ATAPI-8 specification.

#### **3.1.1** ATA General Feature Command Set

The SSD supports the ATA General feature Command set (non-packet), which consists of

- · EXECUTE DEVICE DIAGNOSTIC
  - FLUSH CACHE
  - IDENTIFY DEVICE
  - READ DMA
  - READ DMA WITHOUT RETRIES

• READ SECTOR(S)

- READ SECTORS(S) WITHOUT RETRIES
- READ VERIFY SECTORS(S)
- READ VERIFY SECTORS(S) WITHOUT RETRIES
- SEEK
- SET FEATURES
- WRITE DMA
- WRITE DMA WITHOUT RETRIES
- WRITE SECTOR(S)
- WRITE SECTOR(S) WITHOUT RETRY
- READ MULTIPLE

- INITIALIZE DEVICE PARAMETERS
- DATA SET MANAGEMENT

GE TECH, CORP. The SSD supports all the following optional commands

- READ BUFFER
- DOWNLOAD MICROCODE

DOC NO	:	Rev.
Issued Date	: 2020/10/08	
Revised Date	:	V1.0

## 3.1.2 Identify Device Data

The following table details the sector data returned after issuing an IDENTIFY DEVICE command.

Word         F=Fixed V=Variable X=Both         Default Value           0         F         0040h           1         F         3FFFh           2         F         C837h           3         F         0010h           4-5         F         0000h           6         F         003Fh           7-8         F         0000h           9         F         0000h           10-19         V         Var.           20-22         F         0000h           10-19         V         Var.           23-26         V         Var.           27-46         V         Var.           477         F         8010h           48         F         4000h           49         F         2F00h           50         F         0000h           51-52         F         0000h           53         F         0007h           54         V         Var.           55         V         Var.           56         V         Var.           57-58         V         Var.           59         V	General configuration bit-significant informationObsolete-Number of logical cylinders (16,383)Specific configurationObsolete-Number of logical heads (16)RetiredObsolete-Number of logical sectors per logical track (63)Reserved for assignment by the Compact Flash AssociationRetiredSerial number (20 ASCII characters)Retired / ObsoleteFirmware revision (8 ASCII characters)Model number7:0 - Maximum number of sectors transferred per interrupt on multiple commandsTrusted Computing feature set options, bit14 should be 1
1         F         3FFFh           2         F         C837h           3         F         0010h           4-5         F         0000h           6         F         003Fh           7-8         F         0000h           9         F         0000h           10-19         V         Var.           20-22         F         0000h           23-26         V         Var.           27-46         V         Var.           47         F         8010h           48         F         4000h           49         F         2F00h           50         F         4000h           51-52         F         0000h           53         F         0007h           54         V         Var.           55         V         Var.           56         V         Var.           57-58         V         Var.           59         V         0101h	Obsolete-Number of logical cylinders (16,383)Specific configurationObsolete-Number of logical heads (16)RetiredObsolete-Number of logical sectors per logical track (63)Reserved for assignment by the Compact Flash AssociationRetiredSerial number (20 ASCII characters)Retired / ObsoleteFirmware revision (8 ASCII characters)Model number7:0 - Maximum number of sectors transferred per interrupt on multiple commandsTrusted Computing feature set options, bit14 should be 1
2         F         C837h           3         F         0010h           4-5         F         0000h           6         F         003Fh           7-8         F         0000h           9         F         0000h           10-19         V         Var.           20-22         F         0000h           23-26         V         Var.           27-46         V         Var.           47         F         8010h           48         F         4000h           49         F         2F00h           50         F         4000h           51-52         F         0000h           53         F         0007h           54         V         Var.           55         V         Var.           56         V         Var.           57-58         V         Var.	Specific configurationObsolete-Number of logical heads (16)RetiredObsolete-Number of logical sectors per logical track (63)Reserved for assignment by the Compact Flash AssociationRetiredSerial number (20 ASCII characters)Retired / ObsoleteFirmware revision (8 ASCII characters)Model number7:0 - Maximum number of sectors transferred per interrupt on multiple commandsTrusted Computing feature set options, bit14 should be 1
3         F         0010h           4-5         F         0000h           6         F         003Fh           7-8         F         0000h           9         F         0000h           9         F         0000h           10-19         V         Var.           20-22         F         0000h           23-26         V         Var.           27-46         V         Var.           47         F         8010h           48         F         4000h           49         F         2F00h           50         F         4000h           51-52         F         0000h           53         F         0007h           54         V         Var.           55         V         Var.           56         V         Var.           57-58         V         Var.           59         V         0101h	Obsolete-Number of logical heads (16)RetiredObsolete-Number of logical sectors per logical track (63)Reserved for assignment by the Compact Flash AssociationRetiredSerial number (20 ASCII characters)Retired / ObsoleteFirmware revision (8 ASCII characters)Model number7:0 - Maximum number of sectors transferred per interrupt on multiple commandsTrusted Computing feature set options, bit14 should be 1
4-5       F       0000h         6       F       003Fh         7-8       F       0000h         9       F       0000h         10-19       V       Var.         20-22       F       0000h         23-26       V       Var.         27-46       V       Var.         47       F       8010h         48       F       4000h         49       F       2F00h         50       F       4000h         51-52       F       0000h         53       F       0007h         54       V       Var.         55       V       Var.         56       V       Var.         57-58       V       0101h	Retired         Obsolete-Number of logical sectors per logical track (63)         Reserved for assignment by the Compact Flash Association         Retired         Serial number (20 ASCII characters)         Retired / Obsolete         Firmware revision (8 ASCII characters)         Model number         7:0 - Maximum number of sectors transferred per interrupt on multiple commands         Trusted Computing feature set options, bit14 should be 1
6         F         003Fh           7-8         F         0000h           9         F         0000h           10-19         V         Var.           20-22         F         0000h           23-26         V         Var.           27-46         V         Var.           47         F         8010h           48         F         4000h           50         F         4000h           51-52         F         0000h           53         F         0007h           54         V         Var.           55         V         Var.           56         V         Var.           57-58         V         0101h	Obsolete-Number of logical sectors per logical track (63)Reserved for assignment by the Compact Flash AssociationRetiredSerial number (20 ASCII characters)Retired / ObsoleteFirmware revision (8 ASCII characters)Model number7:0 - Maximum number of sectors transferred per interrupt on multiple commandsTrusted Computing feature set options, bit14 should be 1
7-8       F       0000h         9       F       0000h         10-19       V       Var.         20-22       F       0000h         23-26       V       Var.         27-46       V       Var.         47       F       8010h         48       F       4000h         49       F       2F00h         50       F       4000h         51-52       F       0007h         54       V       Var.         55       V       Var.         56       V       Var.         57-58       V       0101h	Reserved for assignment by the Compact Flash AssociationRetiredSerial number (20 ASCII characters)Retired / ObsoleteFirmware revision (8 ASCII characters)Model number7:0 - Maximum number of sectors transferred per interrupt on multiple commandsTrusted Computing feature set options, bit14 should be 1
9         F         0000h           10-19         V         Var.           20-22         F         0000h           23-26         V         Var.           27-46         V         Var.           47         F         8010h           48         F         4000h           49         F         2F00h           50         F         4000h           51-52         F         0000h           53         F         0007h           54         V         Var.           55         V         Var.           56         V         Var.           57-58         V         Var.           59         V         0101h	Retired         Serial number (20 ASCII characters)         Retired / Obsolete         Firmware revision (8 ASCII characters)         Model number         7:0 - Maximum number of sectors transferred per interrupt on multiple commands         Trusted Computing feature set options, bit14 should be 1
10-19         V         Var.           20-22         F         0000h           23-26         V         Var.           27-46         V         Var.           47         F         8010h           48         F         4000h           49         F         2F00h           50         F         4000h           51-52         F         0000h           53         F         0007h           54         V         Var.           55         V         Var.           56         V         Var.           57-58         V         Var.           59         V         0101h	Serial number (20 ASCII characters)         Retired / Obsolete         Firmware revision (8 ASCII characters)         Model number         7:0 - Maximum number of sectors transferred per interrupt on multiple commands         Trusted Computing feature set options, bit14 should be 1
20-22         F         0000h           23-26         V         Var.           27-46         V         Var.           47         F         8010h           48         F         4000h           49         F         2F00h           50         F         4000h           51-52         F         0000h           53         F         0007h           54         V         Var.           55         V         Var.           56         V         Var.           57-58         V         Var.           59         V         0101h	Retired / Obsolete         Firmware revision (8 ASCII characters)         Model number         7:0 - Maximum number of sectors transferred per interrupt on multiple commands         Trusted Computing feature set options, bit14 should be 1
23-26         V         Var.           27-46         V         Var.           47         F         8010h           48         F         4000h           49         F         2F00h           50         F         4000h           51-52         F         0000h           53         F         0007h           54         V         Var.           55         V         Var.           56         V         Var.           57-58         V         Var.           59         V         0101h	Firmware revision (8 ASCII characters)Model number7:0 - Maximum number of sectors transferred per interrupt on multiple commandsTrusted Computing feature set options, bit14 should be 1
27-46         V         Var.           47         F         8010h           48         F         4000h           49         F         2F00h           50         F         4000h           51-52         F         0000h           53         F         0007h           54         V         Var.           55         V         Var.           56         V         Var.           57-58         V         Var.           59         V         0101h	Model number         7:0 – Maximum number of sectors transferred per interrupt on multiple commands.         Trusted Computing feature set options, bit14 should be 1
47         F         8010h           48         F         4000h           49         F         2F00h           50         F         4000h           51-52         F         0000h           53         F         0007h           54         V         Var.           55         V         Var.           56         V         Var.           57-58         V         0101h	<ul> <li>7:0 – Maximum number of sectors transferred per interrupt on multiple commands</li> <li>Trusted Computing feature set options, bit14 should be 1</li> </ul>
48         F         4000h           49         F         2F00h           50         F         4000h           51-52         F         0000h           53         F         0007h           54         V         Var.           55         V         Var.           56         V         Var.           57-58         V         0101h	multiple commands Trusted Computing feature set options, bit14 should be 1
49         F         2F00h           50         F         4000h           51-52         F         0000h           53         F         0007h           54         V         Var.           55         V         Var.           56         V         Var.           57-58         V         Var.           59         V         0101h	
50         F         4000h           51-52         F         0000h           53         F         0007h           54         V         Var.           55         V         Var.           56         V         Var.           57-58         V         Var.           59         V         0101h	
51-52         F         0000h           53         F         0007h           54         V         Var.           55         V         Var.           56         V         Var.           57-58         V         Var.           59         V         0101h	Capabilities
53         F         0007h           54         V         Var.           55         V         Var.           56         V         Var.           57-58         V         Var.           59         V         0101h	Capabilities
54         V         Var.           55         V         Var.           56         V         Var.           57-58         V         Var.           59         V         0101h	Obsolete
55         V         Var.           56         V         Var.           57-58         V         Var.           59         V         0101h	Words 88 and 70:64 valid
56         V         Var.           57-58         V         Var.           59         V         0101h	Obsolete - Number of logical cylinders (16,383)
57-58         V         Var.           59         V         0101h	Obsolete - Number of logical heads (16)
59 V 0101h	Obsolete - Number of logical sectors per logical track (63)
	Capacity(Cylinders*heads*sectors)
	Number of sectors transferred per interrupt on multiple commands
60-61 V 250,069,680 (128GB) 500,118,192 (256GB) 1,000,215,21 (512GB)	2 Total number of user addressable logical sectors for 28-bit commands (DWord)
62 F 0000h	Obsolete
63 V 0007h	Multi-word DMA modes supported/selected
64 F 0003h	PIO modes supported
65 F 0078h	Minimum multiword DMA transfer cycle time per word
66 F 0078h	· · · · ·
67 F 0078h	Manufacture's recommended multiword DMA transfer cycle time
68 F 0078h	

#### Table 14 Returned Sector Data

DOC NO	:	Rev.	
Issued Date	: 2020/10/08		
Revised Date	:	V1.0	

	Word	F=Fixed V=Variable X=Both	Default Value	Description
	69-70	F	0000h	Reserved(for future command overlap and queuing)
	71-74	F	0000h	Reserved for the IDENTIFY packet DEVICE command
	75	F	001Fh	4:0 Maximum Queue depth-1=31
	76	V	070Eh	Serial ATA capabilities
	77	V	Var.	Reserved for Serial ATA
	78	V	014Ch	Serial ATA features supported
	79	V	Var.	Serial ATA features enabled
	80	F	01FEh	Major Version Number
	81	F	0021h	Minor Version Number
	82	F	346Bh	Commands and feature sets supported
	83	F	7D01h	Commands and feature sets supported
	84	F	4123h	Commands and feature sets supported
	85	V	3469h	Commands and feature sets supported or enabled
	86	V	BC01h	Commands and feature sets supported or enabled
	87	F	4023h	Commands and feature sets supported or enabled
	88	V	407Fh	Ultra DMA modes
	89	F	0003h	Time required for security erase unit completion
	90	F	0003h	Time required for enhanced security erase completion
	91	F	0000h	Current advanced power management value
	92	V	Var.	Master Password Identifier
	93	V	000 <mark>0</mark> h	Hardware reset result. The contents of bits (12:0) of this word shall change only during the execution of a hardware reset.
	94	F	0000h	Current AAM value
	95	F	0000h	Stream Minimum Request Size
	96	F	0000h	Streaming Transfer Time - DMA
	97	F	0000h	Streaming Access Latency - DMA and PIO
	98-99	F	0000h	Streaming Performance Granularity
			125,045,424 (64GB)	
	100-103	V	250,069,680 (128GB)	Maximum user LBA for 48-bit Address feature set
			500,118,192	
			(256GB)	
	104	F	0000h	Streaming Transfer Time - PIO
	105	F	0008h	Maximum number of 512-byte blocks per DATA SET MANAGEMENT command
	106	F	4000h	Physical sector size/logical sector size
	107	F	0000h	Inter-seek delay for ISO-7779 acoustic testing in microseconds
	108-111	V	0000h 0000h 0000h 0000h	World wide name
-	112-115	F	0000h	Reserved for word wide name extension to 128 bits
	116	F	0000h	Reserved for TLC
-	117-118	F	0000h	Words per logical sector
	119	F	4010h	Commands and feature sets supported

DOC NO	:	Rev.
Issued Date	: 2020/10/08	
Revised Date	:	V1.0

Word	F=Fixed V=Variable X=Both	Default Value	Description
120	F	4010h	Commands and feature sets supported or enabled
121-126	F	0000h	Reserved for expanded supported and enabled settings
127	F	0000h	Removable Media Status Notification feature set support
128	V	0021h	Security status
129-159	F	0000h	Vendor specific
160	F	0000h	Compact Flash Association (CFA) power mode 1
161-167	F	0000h	Reserved for the CompactFlash Association
168	F	0000h	
169	F	0001h	DATA SET MANAGEMENT command is supported
170-173	V	Var.	Additional Product Identifier (ATA String)
174-175	F	0000h	Reserved
176-205	F	0000h	Current media serial number (ATA string)
206	F	003Dh	SCT Command Transport
207-2 <mark>08</mark>	F	0000h	Reserved
209	F	4000h	Alignment of logical blocks within a physical block
210-211	F	0000h	Write-Read-Verify Sector Count Mode 3 (DWord)
212-213	F	0000h	Write-Read-Verify Sector Count Mode 2 (DWord)
214	F	0000h	NV Cache Capabilities
215-216	F	0000h	NV Cache Size in Logical Blocks (DWord)
217	F	0001h	Nominal media rotation rate
218	F	0000h	Reserved
219	F	0000h	NV Cache Options
220	F	0000h	7:0 Write-Read-Verify feature set current mode
221	F	0000h	Reserved
222	F	1075h	Transport major version number
223	F	0000h	Transport minor version number
224-229	F	0000h	Reserved
230-233	F	0000h	Extended Number of User Addressable Sectors (QWord)
234	F	0000h	Minimum number of 512-byte data blocks per DOWNLOAD MICROCODE command for mode 03h
235	F	0000h	Minimum number of 512-byte data blocks per DOWNLOAD MICROCODE command for mode 03h
236-254	F	0000h	Reserved
255	V	Var.	Integrity word

Note:

1.F=Fixed. The content of the word is fixed and does not change for removable media devices, these values may change when media is Removed or changed.

2.V=Variable. The state of at least one bit in a word is variable and may change depending on the state of the device or the commands executed by the device.

3.X=F or V. The content of the word may be fixed or variable.

DOC NO	:	Rev.
Issued Date	: 2020/10/08	
Revised Date	:	V1.0

## **3.2 Power Management Command Set**

The SSD supports the power management command set, which consists of

- · CHECK POWER MODE
- IDLE
- IDLE IMMEDIATE
- SLEEP
- STANDBY
- STANDBY IMMEDIATE

## 3.3 Security Mode Feature Set

The SSD supports the Security Mode command set, which consist of

- SECURITY SET PASSWORD
- SECURITY UNLOCK
- SECURITY ERASE PREPARE
- SECURITY ERASE UNIT
- SECURITY FREEZE LOCK
- SECURITY DISABLE PASSWORD

## 3.4 SMART Command Set

ORAGE TECH, CORP. The SSD supports the SMART command set, which consist of

- SMART ENABLE OPERATIONS
- SMART DISABLE OPERATIONS
- · SMART ENABLE/DISABLE AUTOSAVE
- SMART RETURN STATUS

The SSD supports the following optional commands.

- SMART EXECUTE OFF-LINE IMMEDIATE
- SMART READ DATA
- SMART READ LOG
- SMART WRITE LOG

The table below lists the SMART commands.

DOC NO	:	Rev.
Issued Date	: 2020/10/08	
Revised Date	:	V1.0

Code	LBA Low value
D0h	
D1h	
D2h	
D3h	
D4h	
	00h
	01h
	02h
	7Fh
	81h
	82h
D5h	
D6h	
D8h	
D9h	
DAh	
DBh	
	D0h D1h D2h D3h D4h D4h D5h D5h D6h D8h D9h DAh

## Table 15 SMART commands

## 3.5 Host Protected Area Command Set

The SSD supports the Host Protected Area command set which consists of the following events.

- READ NATIVE MAX ADDRESS
- SET MAX ADDRESS
- READ NATIVE MAX ADDRESS EXT
- SET MAX ADDRESS EXT

The SSD supports the following optional commands.

- SET MAX SET PASSWORD
- · SET MAX LOCK
- · SET MAX FREEZE LOCK
- · SET MAX UNLOCK

DOC NO	:	Rev.
Issued Date	: 2020/10/08	
Revised Date	:	V1.0

## 3.6 48-Bit Address Command Set

The SSD supports the Host Protected Area command set, which consists of the following events.

- FLUSH CACHE EXT
- READ DMA EXT
- READ NATIVE MAX ADDRESS EXT
- READ SECTOR(S) EXT
- READ VERIFY SECTOR(S) EXT
- READ MULTIPLE EXT
- SET MAX ADDRESS EXT
- WRITE DMA EXT

• WRITE MULTIPLE EXT

- WRITE MULTIPLE FUA EXT
- WRITE SECTOR(S) EXT

## 3.7 Device Configuration Overlay Command Set

The SSD supports the Device configuration Overlay command set, which consists of the following ECH, CORP, events.

- DEVICE CONFIGURATION FREEZE LOCK
- DEVICE CONFIGURATION IDENTITY
- DEVICE CONFIGURATION RESTORE
- DEVICE CONFIGURATION SET

## 3.8 General Purpose log Command Set

The SSD supports the general purpose log command set, which consists of the following events.

- READ LOG EXT

DOC NO	:	Rev.
Issued Date	: 2020/10/08	V/4 0
Revised Date	:	V1.0

## **4 SATA COMMAND SETS**

## 4.1 SATA Command

The SATA 3.0 Specification is a super set of the ATA/ATAPI-8 specification with regard to supported commands. The SSD supports the following features which are unique to the SATA 3.0 Specification.

#### 4.1.1. Software Settings Preservation

The SSD supports the SET FEATURES parameter to enable/disable the preservation of software settings.

#### 4.1.2. Native Command Queuing

The SSD supports the Native Command Queuing (NCQ) command set, which includes the following he ... events. • READ FPDMA QUEUED • WRITE FPDMA QUEUED Note: with a maximum queue depth equal to 32

DOC NO	:	Rev.
Issued Date	: 2020/10/08	V/4 0
Revised Date	:	V1.0

## **5 R**EFERENCES

This document references standards defined by a variety of organizations as listed below.

Table 14 Standards References

Date	Title	Location
Dec 2008	VCCI	http://www.vcci.or.jp/vcci_e/general/j oin/index.html
July 2007	ROHS	Search for material description datasheet at http://intel.pcnalert.com
July 2007	SFF-8144, 1.8" drive form factor	http://www.sffcommittee.org
February 2007	Serial ATA Revision 2.6	http://www.sata-io.org
May 2006	SFF-8223, 2.5" Drive w/Serial Attachment Connector	http://www.sffcommittee.org
May 2005	SFF-8201, 2.5" drive form factor	http://www.sffcommittee.org
April 2004	ATA-7 Spec. Volume 1	http://www.t13.org/
Aug. 2009	ATA-8 Spec. Rev 2	http://www.t13.org/
	International Electro Technical Commission EB61000	
2008	4-2 Personnel Electrostatic Discharge Immunity	
2008 2004	4-3 Electromagnetic compatibility (EMC)	http://www.iec.ch
2004	<ul><li>4-4 Electromagnetic compatibility (EMC)</li><li>4-5 Electromagnetic compatibility (EMC)</li></ul>	
2008	4-6Electromagnetic compatibility (EMC)	
2008	4-11 (Voltage variations)	
2004	ENV 50204 (Radiated electromagnetic field from digital radio telephones)	http://www.iec.ch

DOC NO	:	Rev.
Issued Date	: 2020/10/08	
Revised Date	:	V1.0

## 6 TERMS AND ACRONYMS

This document incorporates many industry and device specific words use the following list to define a variety of terms and acronyms.

Term Definition			
ΑΤΑ	Advanced Technology Attachment		
ΑΤΑΡΙ	Advanced Technology Attachment Packet Interface		
BER	Bit Error Rate, or percentage of bits that have errors relative to the total number of bits eceived		
BIOS	Basic Input/Output System		
Chipset	A term used to define a collection of integrated components required to make a PC function		
DIPM	Device Initiated Power Management The ability of the device to request SATA link power state changes		
DMA	Direct Memory Access		
DRAM	Dynamic Random Access Memory		
EXT	Extended		
FP	First Party		
GB	Giga-byte defined as 1X10 ⁹ bytes		
нсі	Host Controller Interface		
нст	Hardware Compatibility Test		
HDD	Hard Disk Drive		
HIPM	Host Initiated Power Management The ability of the host to request SATA link power state changes		
Hot Plug	A term used to describe the removal or insertion of a SATA hard drive when the system is powered on		
IOPS	Input output operations per second		
LBA	Logical Block Address		
LPM	Link Power Management: the ability of the SATA link layer to enter one of two lower power consuming states, partial and slumber		
MB	Mega-bytes defined as 1x10 ⁶ bytes		
mSATA	Mini-SATA		

#### Table 17 Glossary of Terms and Acronyms

DOC NO	:	Rev.
Issued Date	: 2020/10/08	
Revised Date	:	V1.0

Term	Definition	
MTBF	Mean time between failure	
	Native Command Queuing	
NCQ	The ability of the SATA hard drive to re-order commands in order to maximize the	
	efficiency of gathering data from the platters	
NOP	No operation	
NTFS	NT file system	
OEM	Original Equipment Manufacturer	
OS	Operation System	
Port	The point at which a SATA drive physically connected to the SATA controller	
RAID	Redundant Array of Independent Disks	
RMS	Root Mean Squared	
RPM	Revolutions per Minute	
RTM	Release to Manufacture	
SATA	Serial ATA	
SFF	Small Form Factor	
	Self-Monitoring, Analysis and reporting Technology	
SMART	An open standard for developing hard drive and software systems that automatically	
	monitors a hard drive's health and reports potential problems	
SSD	Solid State Drive	
TBD	To Be Determined	
WHQL	Microsoft* Windows Hardware Quality Labs	
	A memory device within a hard drive, which is allocated for the temporary storage of	
Write Cache	data before that data is copied to its permanent storage location	
VCCI	Voluntary Control Council for Interface	