BB-HS-104T2505402

Temperature / Low-power Vibration Sensor

250 mV/g Accelerometer, 0-3.3V Output, Ultra Low-power, M12



Features

- Low voltage
- Ultra-low power consumption
- Temperature output
- M12 connector
- Voltage output proportional to acceleration (optional signal conditioning cable available)
- Use with Advantech Wzzard wireless sensing kits and nodes (sold separately)

Introduction

This 250 mV/g accelerometer is specifically selected for use with Advantech's Wzzard Wireless Mesh Sensing Solutions (such as node model BB-WSD2M3101P2K). The transmitter vibration/temperature sensor is manufactured to high industrial specifications and rigorous ISO quality standards.

Optional magnetic mounting base model BB-MH112-1A provides a secure, semi-permanent point of connection to flat or curved surfaces with an operating temperature up to +120 °C (+248 °F).

The sensor provides a voltage signal proportional to the acceleration measurement. Use optional cable# BB-WSDCBL-ACL-2 to rectify and average the sensor output. The cable has an M12 connector and also provides signal conditioning.

Model# BB-WSD2M3101P2K is an industrial mesh node featuring an M12 connector and two second Power Out for sending vibration and temperature data to an IoT network. Battery power is provided on M12 connector pin for two seconds before taking each reading. The node can be used to supply power to low-power sensors that require up to 2 seconds to become stable including sensor# BB-HS-104T2505402.

Ordering Information

| Model No. | Description |
|-------------------|--|
| BB-HS-104T2505402 | Ultra Low-Power Temperature/Vibration Sensor |

Accessories - Sold Separately

BB-MH112-1A – Magnetic mounting base (One base included with Wzzard Condition Based Monitoring Kit #BB-WSK-CBM2.)

BB-WSDCBL-ACL-2 — M12 cable, AC to DC conversion, signal conditioning (One cable included with Wzzard Condition Based Monitoring Kit #BB-WSK-CBM2.)


BB-WSD2M3101P2K – Wzzard Mesh industrial node, M12, 2s power out (One node included with Wzzard Condition Based Monitoring Kit #BB-WSK-CBM2.)



AC-DC M12 Cable # BB-WSDCBL-ACL-2 (optional, sold separately) M12 Industrial Node # BB-WSD2M3101P2K (optional, sold separately)



Typical Frequency Response (at 250 mV/g)

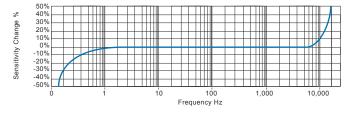

Industries

- Building Services
- Pulp & Paper
- MiningMetals
- Utilities
- Automotive
- Water
- Pharmaceutical

Applications

- Fans
- Rolls
- MotorsPumps
- DryersPresses
- Compressors
- Cooling
- CentrifugesConveyors
- VAC
- Air Handlers
- SpindlesMachine Tooling
- Gearboxes
- Process Equipment

Wzzard Condition Based Monitoring Starter Kit

Model# BB-WSK-CBM-2

Included Hardware

- Wzzard Mesh Wireless Sensor Node Model# BB-WSD2M3101P2K (2 analog inputs, M12 connector, external antenna)
- (1) BB-HS-104T2505402, ultra-low power temperature/vibration sensor
- (1) BB-MH112-1A, magnetic mounting base
- (1) BB-WSDCBL-ACL-2, M12 cable with signal conditioning
- SmartSwarm 342 Ethernet Network Gateway with Wzzard board. (Note: one gateway supports up to 100 wireless sensor nodes.)

Included Software

Cloud license for WebAccess/DMP device management and configuration tool. Node-RED flow with Web server for:

- Real time data display
- Historian trending
- Visual and email/SMS alerts
- External data source integration (weather, Twitter feeds, and more)






Specifications

| Specifications | | | |
|--|--|--|--|
| Technical Performance | | | |
| Mounted Base Resonance (resonant frequency) | 25 kHz (1,500 kcpm) (nominal) | | |
| Sensitivity | 250 mV/g \pm 8% Nominal 80 Hz at +22 °C | | |
| Frequency Response | 0.3Hz (18 cpm) to 10 kHz (600 kcpm) \pm 10% | | |
| Isolation | Base isolated | | |
| Range | ± 8g @ 3.3 power | | |
| Transverse Sensitivity | < 5% | | |
| Amplitude Linearity | ± 1.0% | | |
| Temperature Output | -10.9 mV/°C standard °C - Option 150°C 3.3V supply, min Output 0 °C 2.1V 10 °C 1.99V | | |
| Temperature Scaling - sensor and Model BB-WSDCBL-ACL-2 cable (see ordering table) | 0V = 365.54 °F 3.3V = -176.688 °F | | |
| Vibration Scaling - sensor and Model BB-WSDCBL-ACL-2 cable (see ordering table) | 1.4V = 0g 3.3V = 7.6g | | |
| Mechanical | | | |
| Case Material | Stainless steel | | |
| Sensing Element/Construction | PZT/Shear | | |
| Mounting Torque | 8Nm | | |
| Weight | 125 gm (nominal), body only | | |
| Screed Cable Assembly | HS-AC010 - straight HS-AC011 - right angle | | |
| Mounting Threads | 1/4-28" UNF male | | |
| Cable / Connector | M12 | | |
| Magnetic Mounting Base (optional, sold separately) | 1" diameter 1/4-28" UNF male thread 40 lb. pull strength 0.7" height | | |

| Electrical | | |
|--|---|--|
| Electrical Noise | < 500µg | |
| Power Requirements | 3.3V nominal | |
| Current Consumption | 100μA nominal at 5V supply (60μA at 1.8V) | |
| Bias Voltage | 50% of supply voltage | |
| Setting Time | 1 second | |
| Output Impedance | 100 Ohms, maximum | |
| Case Isolation | >108 Ohms at 500V | |
| Environmental | | |
| Operating Temperature Range | -50 to +125 °C | |
| Sealing | IP67 | |
| Maximum Shock | 5000g | |
| Regulatory – Approvals / Standards / Directives | | |
| EMC: EN 61326-1:2013 | | |
| RoHS-3 (2011/65/EU amended by 2015/863/EU), CE, WEEE | | |

Mechanical Drawing - Sensor

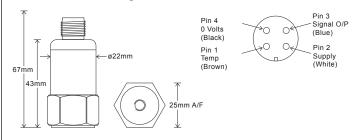


Installation DetailVibration sensor should be fire

Vibration sensor should be firmly flixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



Mechanical Drawing - Magnetic Mounting Base



AD\ANTECH www.advantech.com