


ADAM-6015

ADAM-6017


ADAM-6018+

7-ch Isolated RTD Input Modbus TCP Module
8-ch Isolated Analog Input Modbus TCP Module
with 2-ch DO

8-ch Isolated Thermocouple Input Module

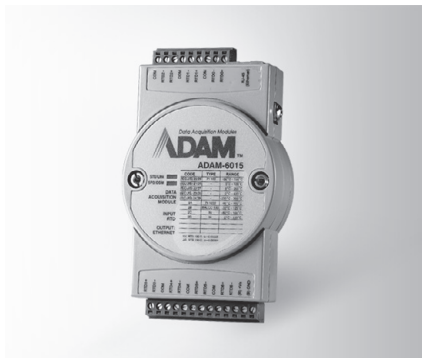

ADAM-6015

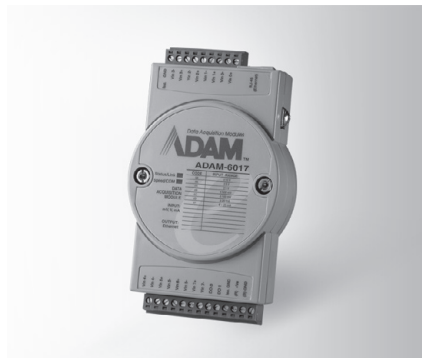

ADAM-6017



ADAM-6018+



Specifications

Analog Input

- **Channels** 7 (differential)
- **Input Impedance** > 10 MΩ
- **Input Connections** 2 or 3 wire
- **Input Type** Pt, Balco and Ni RTD
- **RTD Types and Temperature Ranges**
 - Pt 100
 - 50°C ~ 150°C
 - 0°C ~ 100°C
 - 0°C ~ 200°C
 - 0°C ~ 400°C
 - 200°C ~ 200°C
 - 40°C ~ 160°C
 - Pt 1000
 - 40°C ~ 160°C
- Supports both IEC 60751 ITS90 (0.0385 W/W°C) and JIS C 1604 (0.0392 W/W°C)
- Balco 500 -30°C ~ 120°C
- Ni 518 -80°C ~ 100°C
- 0°C ~ 100°C
- **Accuracy** ± 0.1% or better
- **High speed mode** ± 0.5% or better
- **Span Drift** ± 25 ppm/°C
- **Zero Drift** ± 6 μV/°C
- **Resolution** 16-bit
- **Sampling Rate**
 - 10 sample/second (total)
 - High speed mode: 1K sample/second (total)
 - CMR @ 50/60 HZ 90dB
 - NMR @ 50/60 HZ 60dB
 - * high speed mode does not support CMR/NMR
- **Wire Burnout Detection**

Ordering Information

- **ADAM-6015** 7-ch Isolated RTD Input Modbus TCP Module

Specifications

Analog Input

- **Channels** 8 (differential)
- **Input Impedance**
 - > 10 MΩ (voltage)
 - 120 Ω (current)
- **Input Type** mV, V, mA
- **Input Range**
 - ±150mV, ±500mV, ±1 V, ±5V, ±10V, 0 ~ 150mV, 0 ~ 500mV, 0 ~ 1V, 0 ~ 5V, 0 ~ 10V, 0 ~ 20mA, 4 ~ 20mA, ±20mA
- **Accuracy**
 - ±0.1% (voltage)
 - ±0.2% (current)
- **Span Drift** ±25 ppm/°C
- **Zero Drift** ±6 μV/°C
- **Resolution** 16-bit
- **Sampling Rate**
 - 10 or 100 sample/second (total)
 - CMR @ 50/60 HZ 90dB
 - NMR @ 50/60 HZ 67dB
- **Common-Mode Voltage** 350V_{DC}

Digital Output

- **Channels** 2, open collector to 30 V, 100 mA max. load
- **Power Dissipation** 300 mW for each module
- **Output Delay**
 - On: 100μs
 - Off: 150μs

Ordering Information

- **ADAM-6017** 8-ch Isolated AI with 2-ch DO Modbus TCP Module

Specifications

Analog Input

- **Channels** 8 (differential)
- **Input Type** Thermocouple
- **Thermocouple Type and Range:**

J	0 ~ 760°C	R	500 ~ 1,750°C
K	0 ~ 1,370°C	S	500 ~ 1,750°C
T	-100 ~ 400°C	B	500 ~ 1,800°C
E	0 ~ 1,000°C		
- **Accuracy@25°C**
 - Type J,K,E,R,S: ±0.1% FSR Max
 - Type B: ±0.15% FSR Max
 - Type T: ±0.2% FSR Max
- **Span Drift** ±25 ppm/°C
- **Zero Drift** ±6 μV/°C
- **Resolution** 16-bit
- **Sampling Rate** 10 sample/second (total)
- **Wire Burnout Detection**

Ordering Information

- **ADAM-6018+** 8-ch Isolated Thermocouple Input Module

Common Specifications

General

- **Certification** CE, FCC, UL
*Class I, Division 2, Groups A, B, C and D Hazardous Locations for ADAM-6015 and ADAM-6017
- **LAN** 10/100Base-T(X)
- **Power Consumption**
 - 2.5 W @ 24 V_{DC} (ADAM-6015)
 - 2.7 W @ 24 V_{DC} (ADAM-6017)
 - 1 W @ 24 V_{DC} (ADAM-6018+)
- **Connectors** 1 x RJ-45 (LAN), Plug-in screw terminal block (I/O and power)

Watchdog

System (1.6 second) and Communication (programmable)
10 ~ 30 V_{DC}

Power Input

- **Supports Peer-to-Peer**
- **Supports GCL**
- **Supports Modbus/TCP, TCP/IP, UDP, RESTful**
- **Supports MQTT (D version), SNMP (D version) Protocols (ADAM-6017 and ADAM-6018+)**

Protection

- **Isolation Protection** 2,000 V_{DC}
- **Built-in TVS/ESD Protection**
- **Power Reversal Protection**

Environment

- **Operating Temperature**
 - 10 ~ 70°C (14 ~ 158°F)
 - 40 ~ 70°C (-40~158°F) (D version)
- **Storage Temperature**
 - 20 ~ 80°C (-4 ~ 176°F)
 - 40 ~ 85°C (-40~185°F) (D version)
- **Operating Humidity** 20 ~ 95% RH (non-condensing)
- **Storage Humidity** 0 ~ 95% RH (non-condensing)