

AFE-A503

Qualcomm® IQ9075M, AMR Control System



Features

- AMR AI control system up to 100 TOPS
- Dedicated I/Os for AMR: 4x GbE, 4xUSB, 2x CAN FD, 16-bit DIO
- 3x M.2 Expansions: 1x E-Key, 1x B-Key, 1x M-Key (support NVMe)
- Sensor connection for camera, LiDAR, IMU, and optional GMSL...etc.
- Supports Ubuntu 24.04
- Supports Advantech Robotic Suite




Specifications

CPU	SoC	IQ9075M
	CPU	Kryo™ CPU Gen 6
	Clock Speed	2.36 GHz
	Number of CPU Cores	8
Memory	Technology	LPDDR5 3200MHz
	Max. Capacity	36GB
	Data Rate	3200MHz
Storage	UFS	128GB
	NVMe	Support through M.2 M-Key
GPU & AI	GPU	Adreno 663
	Clock Speed	Up to 800 MHz
	AI DSP	Hexagon
	Performance	Up to dense 100 TPOS, sparse 200 TOPS
Display	HDMI	1 x HDMI port 1.4a up to 4K@ 24Hz, 24bpp
Ethernet	Controller	LAN1-3: Intel i226; LAN4: RTL8221
	Speed	2.5GbE
I/O	Ethernet	4 x RJ-45 Optional PoE: LAN1-2 with PoE (available with MIOe-PSE power solution) PoE out: 50V _{dc} , each max. 0.3A, total max. 30W
	USB Type-A	1 x USB3.2 Gen 2 (10 Gbps), OTG, each 5V/1.5A 3 x USB3.2 Gen.1 (5 Gbps), each 5V/1.5A
	COM Port	2 x RS-232/422/485
	GPIO	2 x 8-bit general purpose input output I/O isolation
	CAN Bus	2 x CAN2.0 A/B & CAN-FD, isolation
	FAN	1 x Smart Fan 1A@12V
	LED/ Reset	Power-on, Reset
	Watchdog Timer	Support
Board Feature	TPM	TPM 2.0
	Time Sync	Support GNSS-based time sync
Expansion	M.2 E-Key	1 x E-Key 2230 (PCIe x1, USB2.0, UART)
	M.2 B-Key	1 x B-Key 3052, 2242 (USB 3.2, USB2.0) w/ Nano-SIM
	M.2 M-Key	1 x M-Key 2280 (PCIe Gen4x4)
	GMSL	8x GMSL (coming this September, by option)
Power	Supply Voltage	Vin: 20~36V, ± 10%
	Power Management	AT, ATX
	Max. Consumption	42W
	Idle Consumption	28W
Environment	Temperature	System Operating: Standard: -20~55°C (-4 ~ 131°F) with 0.7 m/s airflow, Storage: -40 ~ 85°C (-40 ~ 185°F)
	Humidity	Operating: 40° C @ 95% relative humidity, non-condensing Storage: 60° C @ 95%relative humidity, non-condensing
	Vibration Resistance	Up to 3 Grms
Certification	EMC	CE/FCC/CCC/BSMI Class B, ESD 8KV/15KV Criteria B
	Safety	CB/UL/CCC/BSMI 62368
Mechanical	Dimensions (W x D x H)	175 x 119 x 80 mm w/o external fan 213 x 119 x 80 mm w/ external fan
	Net Weight	1.85kg
	Construction	Aluminum housing


Dimensions

Unit: mm

Standard Dimension

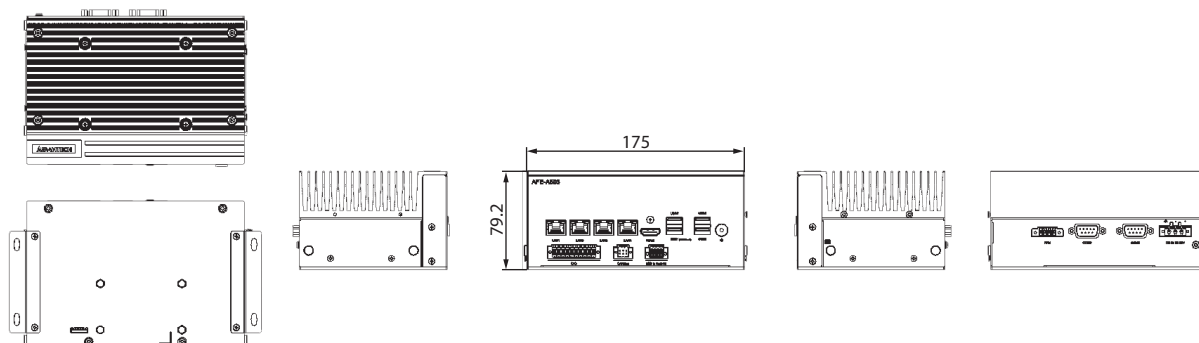

GMSL Dimension

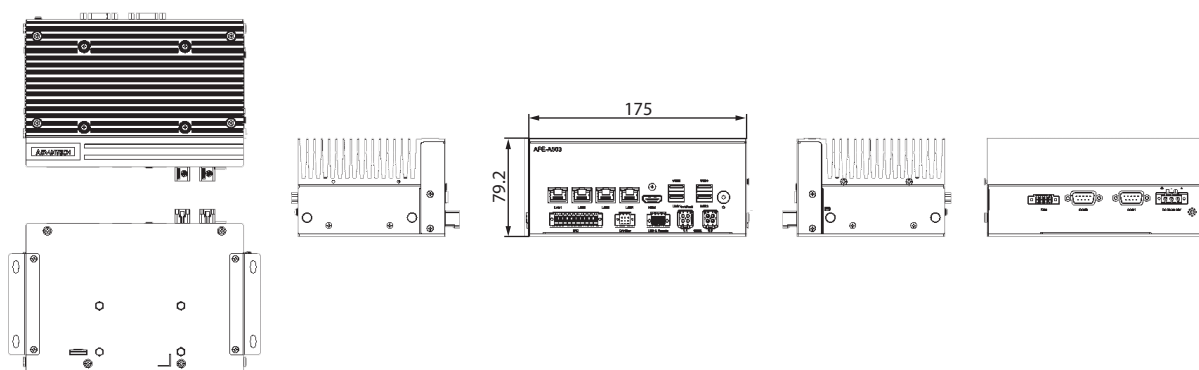

Front I/O



Rear I/O



Ordering Information

Part No.	SoC	Memory	GMSL	HDMI	GbE	USB	COM	CAN FD	DIO	DC-in	Made in
AFE-A503-M1A1U	IQ9075M	36GB LPDDR5	0	1	4	4	2	2 Iso.	16bit Iso.	20-36V	Taiwan
AFE-A503-M2A1U	IQ9075M	36GB LPDDR5	8	1	4	4	2	2 Iso.	16bit Iso.	20-36V	Taiwan

Packing List

Part Number	Description	Quantity
-	AFE-A503 Unit	1
-	AFE-RM06-00A1	1
-	Mounting kit	1
1652004519	1 x 3-pin plug-in block for power in	1
1652005282	Terminal plug 1x4, F	1
1652008233-01	Terminal plug 2x3, F	1
1652008720-01	Terminal plug 2x10, F	1
1652008721-01	Terminal plug 2x4, F	1

Optional Accessories

Part Number	Description	Suggest Quantity per AFE-A503
96PSA-A150W24T2-4	AC to DC adapter, DC 24V 150W	1
1702002600	Power cable 3-pin 183cm, USA type	1
1702002605	Power cable 3-pin 183cm, EU type	1
1702031801-11	Power cable 3-pin 183cm, UK type	1
1700000596-11	Power cable, 3-Pin 183cm, China/Australia type	1
MIOE-PSE-DPA1* (need thermal pad)	MIOE-PSE Dual Port 15.4W PoE PSE module	1
AMK-A0053	AFE-R760 Fan Kit (with Fan Cable)	1
AFE-RM06-00A2	8ports GMSL, isolation IO board	1
1751000759-01	Cable Ant. FAKRA-Z/F FAKRA-Z/F RG174 BLK 1M	8
1751000758-01	Cable MINI FAKRA B-Z/F FAKRA-Z/M 1x4 BLK L300	2
20706U24VS0023	Image Ubuntu 24.04	1