

# AIM-55 Office /VESA Docking Station



## Features

- 9 ~ 32 V wide input voltage range
- VESA (75 x 75 mm)-compliant docking stations
- -10 ~ 50 °C (14 ~122 °F) operating temperature
- Reliable docking connector for office applications

CE FCC


## Specifications

|             |                        | Advanced VESA Docking Station                                      | VESA Docking Station with USB              |
|-------------|------------------------|--|--|
| I/O         |                        | 2 x USB 3.0<br>1 x RS-232 COM<br>1 x Gigabit LAN<br>1 x Power jack | 2 x USB 2.0<br>1 x Power jack              |
| Stand       |                        | -  | -  |
| Power       | Input Voltage          | 9 ~ 32 V   | 19 V                                       |
| Mechanical  | Dimensions (W x D x H) | 160 x 61.8 x 189.2 mm (6.3 x 2.4 x 7.4 in)                         | 160 x 61.8 x 189.2 mm (6.3 x 2.4 x 7.4 in) |
|             | Weight                 | 0.282 kg (0.62 lb)   | 0.28 kg (0.61 lb)                          |
| Environment | Operating Temperature  | -10 ~ 50 °C (14 ~122 °F)   | -10 ~ 50 °C (14 ~122 °F)                   |
|             | Storage Temperature    | -20 ~ 70 °C (-4 ~ 158 °F)  | -20 ~ 70 °C (-4 ~ 158 °F)                  |
|             | Safety                 | UL, CB, LVD, CCC   | UL, CB, LVD, CCC                           |
|             | Certifications         | CE, FCC, CCC   | CE, FCC, CCC                               |


## Dimensions

Unit: mm

### VESA Advanced/VESA Docking Station

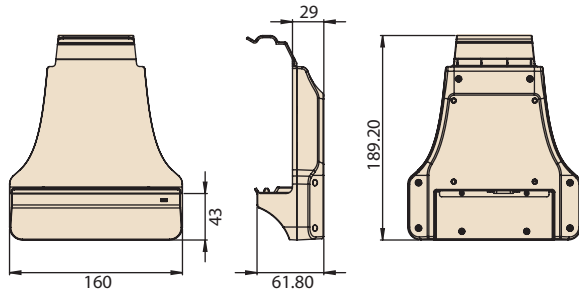

### VESA Dock Stand

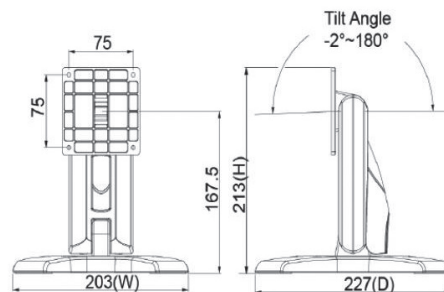

## Ordering Information

| Part Number    | Description  |
|----------------|--|
| AIM-VSD0-0001  | AIM 8 advanced VESA docking station (Full I/O configuration) |
| AIM-VSD0-0003  | AIM 8 VESA docking station with USB (USB)                    |
| HIT-STD-W001-C | AIM 8 VESA stand   |

## Optional Accessories

| Part Number      | Description                               |
|------------------|---|
| 96PSA-A65W19V1-1 | ADP A/D 100-240V 65W 19V C6 DC PLUG 180°  |
| 1700001524       | Power cord (USA) UL 3P 10A 125V 183 cm    |
| 1700008921       | Power cord (Japan) PSE 3P 7A 125V 183 cm  |
| 1700019146       | Power cord (China) CCC 3P 10A 250V 183 cm |
| 1700018553       | Power cord (NZ/AU) SAA 3P 10A 250V 183 cm |
| 170203180A       | Power cord (UK) BSI 3P 10A 250V 183 cm    |
| 170203183C       | Power cord (EU) 3P 2.5A 250V 183 cm       |

## Packing List

| Item | AIM-VSD0-0001               | AIM-VSD0-0003                       |
|------|-----------------------------|-------------------------------------|
| 1    | 1 x VESA Dock(Advanced I/O) | 1 x VESA Dock( Charging & USB Only) |
| 2    | 1 x AC/DC adaptor           | 1 x AC/DC adaptor                   |

Note: The packing list doesn't Include power cord. Please order based on following PNs.