Multiple Charger Stations

Multi-Bay Charging Stations for AIM-37




Features

- Can charge up to 5/10 tablets simultaneously
- Rapid single-handed docking and undocking
- LED indicators for monitoring connecting status
- Fast charging and the best cooling

Specifications

| | Part number | AIM-P705A0 | AIM-P705B0 |
|----------------|------------------------|--|--|
| Capacity | Number of Bays | 10 | 5 |
| Power | Charging Current | 3A | 3A |
| | Charging Voltage | 5V | 5V |
| | Input Voltage | 88 ~ 264 V _{AC} | 88 ~ 264 V _{AC} |
| LED Indicators | | Amber: Charging | Amber: Charging |
| Mechanical | Dimensions (W x D x H) | 374.4 x 251.5 x 133.6 mm (14.74 x 9.9 x 5.26 in) | 374.4 x 251.5 x 133.6 mm (14.74 x 9.9 x 5.26 in) |
| | Weight | NW: 4kg, GW: 5kg | NW: 3.7kg, GW: 4.7kg |
| Environment | Operating Temperature | 0 ~ 40 °C (32 ~ 104 °F) | 0 ~ 40 °C (32 ~ 104 °F) |
| | Storage Temperature | -10 ~ 50 °C (14 ~ 122 °F) | -10 ~ 50 °C (14 ~ 122 °F) |
| | Safety | | |
| | Certifications | | |

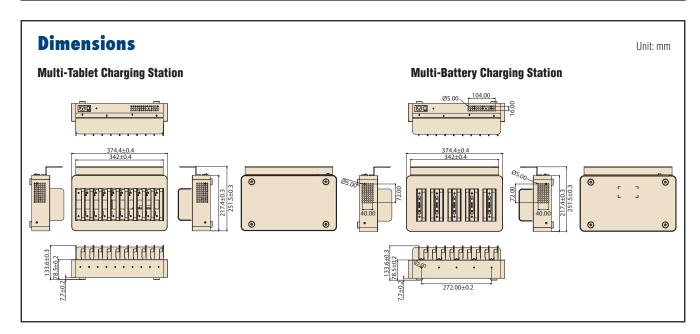

Ordering Information

| Part Number | Description |
|-------------|--|
| AIM-P705A0 | AIM-37 10 in 1 tablet charging station |
| AIM-P705B0 | AIM-37 5 in 1 tablet charging station |