


# AIM-P708

## Simple cradle for AIM-37 Mobile POS

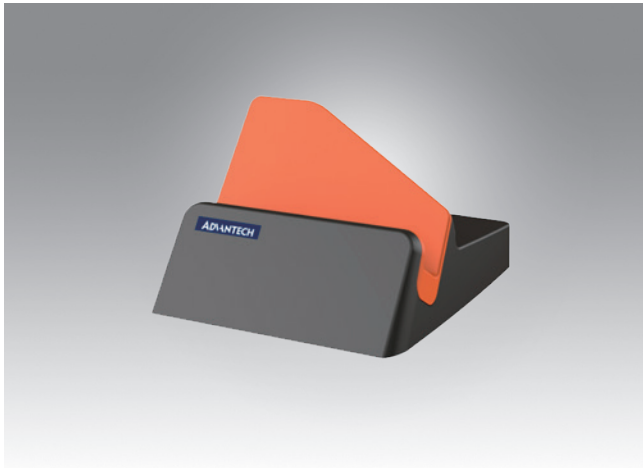

### Features

- Compact and stylish cradle for AIM-37 Mobile POS
- Supports 5V/3A high speed charging to AIM-37 Mobile POS via Pogo Pin
- Supports multiple I/Os: 2 x USB 2.0 Type A; 1 x COM Ports; 1 x RJ45 ports
- Suitable for retail customer to do table-site ordering and information checking
- Provide another charging method to retail customer


### Specifications

Model Name	AIM-P708A0	AIM-P708C0
Pogo Pin	5V/3A Charger	5V/3A Charger
Thermal Printer	N/A	N/A
I/O Port	1 x DC IN (micro USB type with 5V/3A input) 1 x USB 2.0 Type A	1 x DC IN (DC Jack with 12V/3A input) 2 x USB 2.0 Type A 1 x COM Port (RS232) 1 x RJ45
Dimensions	138 x 167 x 98 mm	
Environment	Operating Temperature	0 ~ 40° C
	Storage Temperature	-10 ~ +60° C
	Operating Humidity	5% ~ 95%, non-condensing

### Ordering Information

P/N	Description
AIM-P708A0	Charging, 1 x USB 2.0 Type A; 1x DC in (micro USB)
AIM-P708C0	Charging, 2 x USB 2.0 Type A; 1 x COM Ports; 1 x RJ45 ports, 1 x DC in Jack (12V only)

### Fully-Integrated I/O

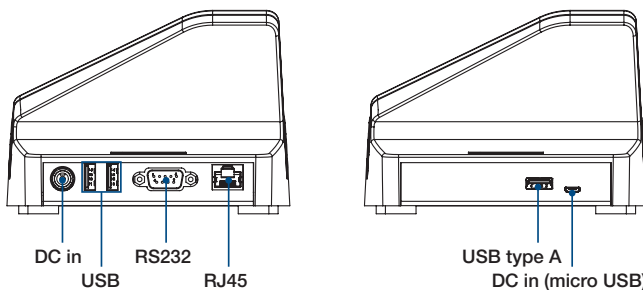

### Dimensions

Unit: mm

