


AIMB-585A2

Micro-ATX Motherboard 6th/7th Gen Intel® Xeon® E3 Processor LGA1151

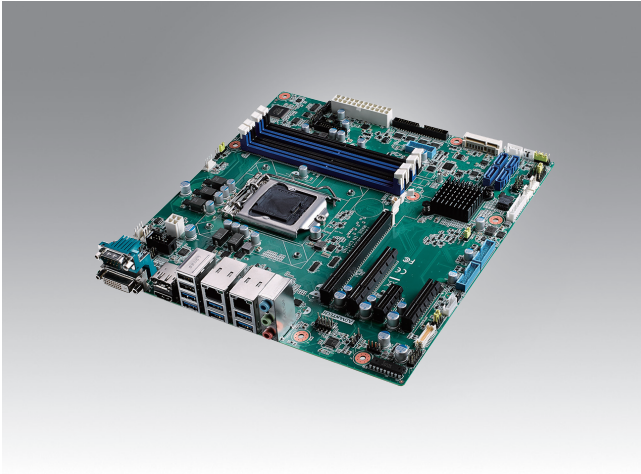

Features

- Supports Intel® Xeon®/ 6th Gen Core™ i7/i5/i3 processor with Q170/C236/H110 chipset
- Four DIMM sockets support up to 64 GB DDR4 2400 MHz SDRAM
- Supports DVI-D, HDMI, DP++, eDP, VGA (optional) display
- Supports Intel AMT 11.0 and Intel vPro competent
- Supports PCIe Gen3, upto 12 x USB 3.0, 4 x SATAIII and dual GbE LAN, mini-PCIe
- Supports Software RAID 0, 1, 5, 10, TPM 1.2/2.0 (optional)
- Supports WISE-PaaS and Embedded Software APIs

Software APIs:




Utilities:



Specifications

	CPU	E3-1275 v5	E3-1225 v5	E3-1268L v5	i7-6700 / i7-6700TE	i5-6500 / i5-6500TE	i3-6100/ i3-6100TE	Pentium G4400 / G4400TE	Celeron G3900 / G3900TE	
Processor System	Core Number	4	4	4	4 / 4	4 / 4	2/2	2/2	2/2	
	Max. Speed	3.6GHz	3.3GHz	2.4GHz	3.4GHz / 2.4GHz	3.2GHz / 2.3GHz	3.7 GHz / 2.7GHz	3.3GHz / 2.9GHz	2.8GHz / 2.6GHz	
	Integrated Graphics	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	
	L3 Cache	8M	6M	8M	8M / 8M	6M / 6M	4M / 4M	3M / 3M	2M / 2M	
	TDP (W)	80W	80W	35W	65W / 35W	65W / 35W	51W / 35W	54W / 35W	47W / 35W	
	Supports Model	WG2	WG2	WG2	QG2 / L	QG2 / L	QG2 / WG2 / L	QG2 / WG2 / L	QG2 / WG2 / L	
	Chipset	Q170/C236/H110								
	BIOS	AMI EFI 128 Mbit SPI								
Expansion Slot	PCIe x1 (Gen3)	1 GB/s per direction, 1 slot (L SKU: 2 x PCIe1 Gen2)								
	PCIe x4 (Gen3)	4 GB/s per direction, 1 slot (QG2/WG2 SKU)								
	PCIe x8 (Gen3)	8 GB/s per direction, 1 slot (QG2/WG2 SKU)								
	PCIe x16 (Gen3)	16 GB/s per direction, 1 slot (When x8 slot is used, x16 slot only offers x8 bandwidth automatically)								
Memory	Technology	Dual Channel DDR4 2400 MHz SDRAM (L SKU: 2 slot)								
	Max. Capacity	64 GB/16 GB per DIMM (L SKU: 32GB)								
	Socket	4 x 288-pin DIMM (L SKU: 2 x 288)								
Graphics	Controller	Intel HD Graphics Supports DirectX11.1, OpenGL 5.0 and OpenCL 2.1								
	VRAM	1 GB maximum shared memory with 2 GB and above system memory installed								
	HDMI	Supports max resolution HDMI 1.4 3840 x 2160 @ 30 Hz								
	VGA	Max resolution 1920 x 1200 @ 60 Hz (on board) (optional)								
	DVI-D	Supports max. resolution 1920 x 1200 @ 60 Hz								
	eDP	Internal pin header, supports max. resolution 3840 x 2160 @ 60 Hz (on board)								
	Display Port	Supports max resolution 4096 x 2304 @ 60 Hz								
Ethernet	Triple Display	eDP/ VGA + DP++ + HDMI, eDP/ VGA + HDMI + DVI-D, DP++ + eDP/ VGA + DVI-D, DVI-D + DP++ + HDMI								
	Dual Display	DP++ + HDMI, DP++ + DVI-D, DP++ + eDP/ VGA, HDMI + DVI-D, HDMI + eDP/ VGA, eDP, VGA + DVI-D								
	Interface	10/100/1000 Mbps								
SATA	Controller	LAN1: 1GbE Intel I219LM (QG2/WG2/L) LAN2: 1GbE Intel I210AT (QG2/WG2)								
	Connector	RJ-45 x 2								
	Max Data Transfer Rate	600 MB/s (SATA 3.0)								
Rear I/O	Channel	4								
	DVI-D	1								
	Display Port	1								
	HDMI	1								
	Ethernet	2								
	USB	QG2, WG2: 6 x USB 3.0, 2 x USB 2.0 L: 4 x USB3.0, 4 x USB2.0								
	Audio	2 (Mic-in/ Line-out) (Mic-in could be configured as "Line-in" under Win OS.)								
	Serial	1 (RS-232)								
	USB 3.0	6 (Default is 4. BOM option add another controller IC to 2 x USB3.0, and QG2, WG2 sku only)								
	Serial	5 (4 x RS-232, 1 x RS-232/422/485 to support auto flow control)								
Internal Connector	VGA	1 (optional)								
	SATA	4 (SATA 3.0)								
	Extended Display Port (eDP)	1								
	JTAG	1								
	mini-PCIe	1 Full-size colay mSATA								
	GPIO	16-bit GPIO								
Watchdog Timer	Output	System reset								
	Interval	Programmable 1 ~ 255 sec/min								
Power Requirements	Power On	Intel Core i7-6700 3.4 GHz, 16 GB DDR4 2133 MHz x 4pcs								
		+5 V	3.3 V	12 V	5 Vsb	-12 V				
Environment		1.31A	0.35A	4.52A	0.06A	0A				
	Operating							Normal		
Physical Characteristics	Temperature	0 ~ 60° C (14 ~ 158° F), depends on CPU speed and cooler solution							-40 ~ 85° C (-40 ~ 185° F)	
	Dimensions	244 mm x 244 mm (9.6" x 9.6")								
Power	Input Mode	ATX input (Default)								

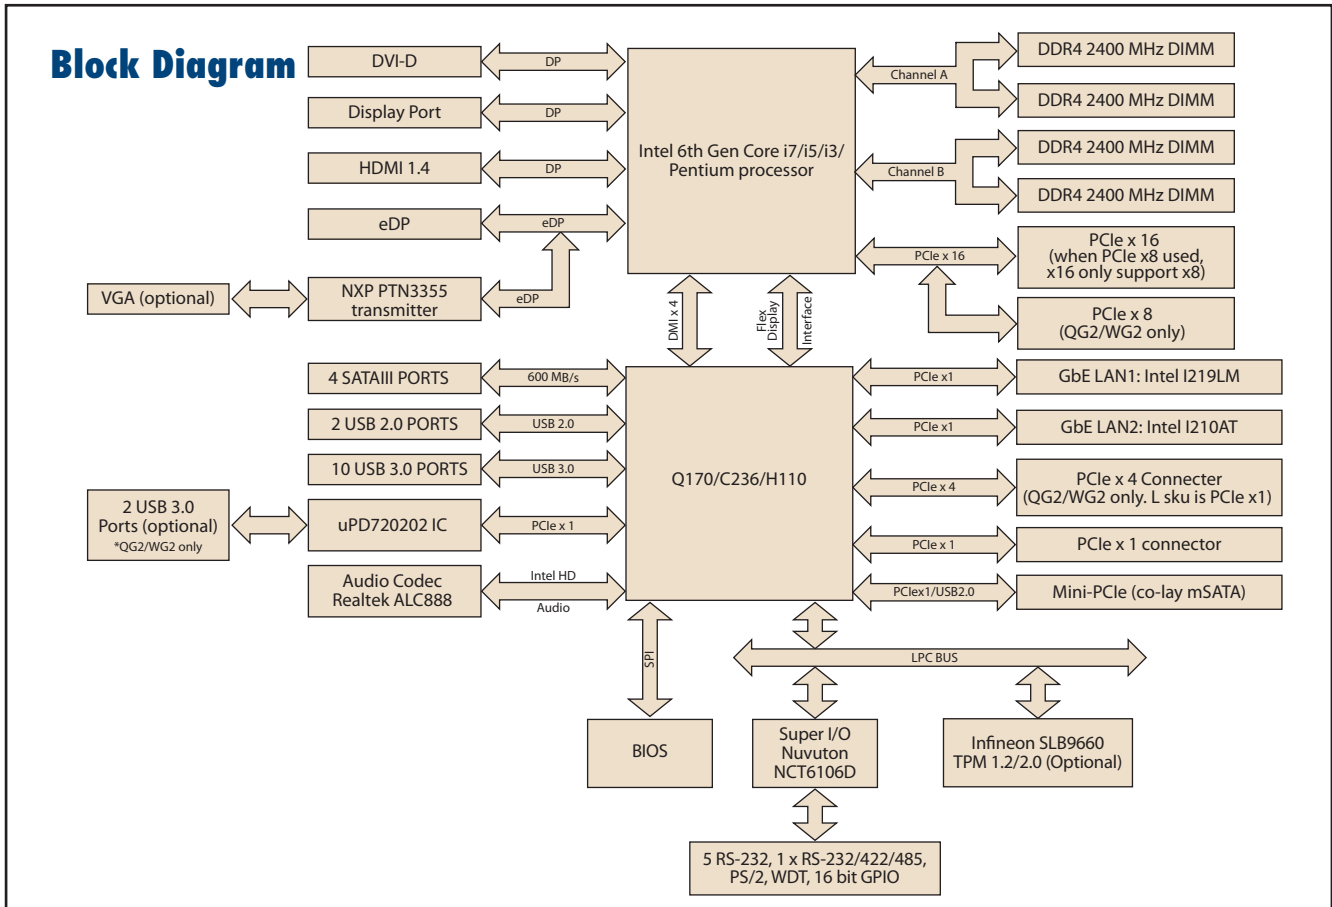

Ordering Information

Part Number	Chipset	Memory	USB 3.0	USB 2.0	VGA	DP	HDMI 1.4	DVI-D	eDP	SATAIII	PCIe x16/ PCIex8	PCIe x4	PCIe x1	COM	TPM	GbE LAN	AMP
AIMB-585QG2-00A2	Q170	Non-ECC	10+(2)**	2	(1)	1	1	1	1	4	1/1	1	1	6	(1)	2	(1)
AIMB-585WG2-00A2	C236	ECC/Non-ECC	10+(2)**	2	(1)	1	1	1	1	4	1/1	1	1	6	(1)	2	(1)
AIMB-585L-00A2	H110	Non-ECC	4	4	(1)	1	1	1	0	3	1/0	0	2	6	(1)	1	(1)

() means BOM options available on MP version.
 ** there is BOM option with added USB 3.0 from controller IC.

Riser Card

Part Number	Description
AIMB-RF10F-01A1E	1U riser card with 1 PCIe16 expansion
AIMB-RP3P8-12A1E****	2U PCIe x16 / PCIe16 to 2 PCIe x8

**** There are three type card with AIMB-RP3P8-12A1E, AIMB-585 only supports PCIe16 and PCIe16 to 2 PCIe x8

Packing List

Part Number	Description	Quantity
1700003194	SATA HDD cable	2
1700022749-13	SATA power cable	2
1920001200T000	I/O port bracket	1
2006058510	Startup manual	1
1930001071	Mini PCIe screws	1

I/O View



Optional Accessories

Part Number	Description
1700020277-01	Dual port USB 3.0 cable 30cm with IO bracket
1960047669N001	LGA1156 CPU cooler for 4U and wallmount chassis, for CPU TDP =< 84W, 4.72" (W) x 4.72" (L) x 3.03" (H)
1960047831N001	LGA1156 CPU cooler for 2U and backplane version of chassis, for CPU TDP =< 65W, 3.27" (W) x 3.27" (L) x 2.17" (H)
1960053207N001	LGA1155 CPU cooler for 2U and wallmount chassis, for CPU TDP =< 45W . D=3.66"(W) x 3.66"(L) x 1.81"(H)
1703060191	KBMS cable 1*6P-2.0/DIN-6P(F)*2, 22 cm
1700025715-01	KBMS cable 1*6P WAFER/PS2*2 w/ BRACKET 35CM
1700000447	1-to-4 serial ports cable kit, 45cm
1701400181	1-to-4 serial ports cable kit, 18cm
1700025673-01	A VGA CABLE 30CM (on board)
1700026163-01	COM2,1 to 1 COM cable 60cm (IDE 10P-2.0) w/ Bracket

Note: Purchasing AIMB-585's proprietary CPU cooler from Advantech is a must, other CPU cooler are NOT compatible with AIMB-585.
 The complete thermal solution is composed of CPU cooler and system fans for the CPU TDP as above.

Embedded OS/API

OS/API	Part No.
WES7P	2070014308
WE8.1	2070014247
win10 IoT Ent	20706WX9ES0091
	20706WX9HS0077
	20706WX9VS0081
Ubuntu 20.04	20706U20DS0047