


# AIMB-788

## LGA1700 12th/13th Generation Intel® Core™ i9/i7/i5/i3 ATX Motherboard with DP/HDMI/VGA, DDR4, USB 3.2, M.2

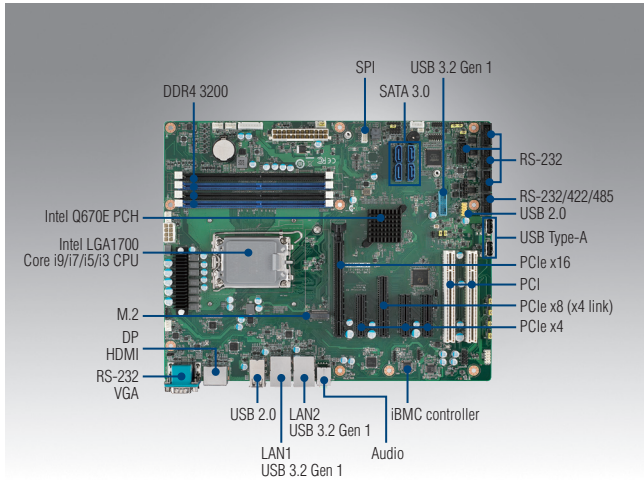

### Features

- Intel® 12th/13th generation Core™ i9/i7/i5/i3 & Pentium®/Celeron® processor with Q670E chipset
- Four DIMM sockets up to 128 GB DDR4 3200
- Triple display DP/HDMI/VGA and dual GbE LAN
- M.2, SATA RAID 0, 1, 5, 10, USB 3.2 Gen 2
- Advantech iBMC remote out-of-band power management solution on DeviceOn
- Qualified for AWS (Amazon Web Service) IoT Greengrass

Note 1: Legacy platform is not supported.

Note 2: dTPM 2.0 module is required to enable Intel vPro and TPM technologies.

Note 3: Intel® Platform Trust Technology (Intel® PTT) ready for Windows 11.


### Quiet Specifications



13th Generation Processors	CPU	i9-13900(E)	i9-13900TE	i7-13700(E)	i7-13700T(E)	i5-13500(E)	i5-13500T(E)	i5-13400(E)	i3-13100(E)	i3-13100T(E)					
	P-core Base Frequency (Up to)	2.0 GHz	1.1 GHz	2.1 GHz	1.4 GHz	2.5 GHz	1.6 GHz	2.5 GHz	3.4 GHz	2.5 GHz					
	L3 Cache	36 MB	36 MB	30 MB	30 MB	24 MB	24 MB	20MB	12 MB	12 MB					
	Cores	24	24	16	16	14	14	10	4	4					
	Processor Base Power	65 W	35 W	65 W	35 W	65 W	35 W	65W	60 W	35 W					
12th Generation Processors	CPU	i9-12900(E)	i9-12900TE	i7-12700(E)	i7-12700T(E)	i5-12500(E)	i5-12400	i5-12500TE	i3-12100(E)	i3-12100TE	Pentium G7400E	Pentium G7400TE	Celeron G6900E	Celeron G6900TE	
	P-core Base Frequency (Up to)	2.4 GHz	1.1 GHz	2.1 GHz	1.4 GHz	3.0 GHz	2.5 GHz	1.9 GHz	3.3 GHz	2.1 GHz	3.6 GHz	3.0 GHz	3.0 GHz	2.4 GHz	
	L3 Cache	30 MB	30 MB	25 MB	25 MB	18 MB	18 MB	18 MB	12 MB	12 MB	6 MB	6 MB	4 MB	4 MB	
	Cores	16	16	12	12	6	6	6	4	4	2	2	2	2	
	Processor Base Power	65 W	35 W	65 W	35 W	65 W	65 W	35 W	60 W	35 W	46 W	35 W	46 W	35 W	
	Socket	LGA 1700													
	Chipset	Q670E													
	BIOS	AMI 256Mbit SPI Flash													
	Expansion Slot	PCI	2												
		PCIe x4 (Gen 3)	3												
PCIe x8 (Gen 3)		1 (x4 link)													
PCIe x16 (Gen 4)*		1													
Memory	Technology	Dual Channel DDR4 3200 Non-ECC UDIMM													
	Max Capacity	128 GB													
Graphics	Sockets	4 x 288-pin DIMM													
	Controller	Chipset integrated Intel UHD Graphics													
Ethernet	VRAM	Shares system memory is subjected to OS													
	Interface	10/100/1000 Mbps													
	Controller	GbE LAN1: Intel I219-LM (PHY); GbE LAN2: Intel I210-AT													
SATA	Connector	2 x RJ-45													
	Max. Data Transfer Rate	600 MB/s													
Rear I/O	Channel	4													
	RAID	0, 1, 5, 10													
	VGA	1 (Resolution up to 1920 x 1200 @ 60Hz)													
	HDMI	1 (Resolution up to 3840 x 2160 @ 60Hz)													
	DisplayPort	1 (Resolution up to 4096 x 2304 @ 60Hz)													
	Ethernet	2													
	USB	8 (2 x USB 3.2 Gen 2, 2 x USB 3.2 Gen 1, 4 x USB 2.0)													
	Audio	2 (Line-out, Mic-in)													
Watchdog Timer	Serial	1 (RS-232)													
	GPIO	8-bit													
Power Requirement	Output	System reset													
	Interval	Programmable 1 ~ 255 sec													
	Power On	Intel Core i 65W , DDR4 32 GB x 4													
Internal Connectors	Voltage	+3.3 V		+5 V		+12 V		+5 Vsb		-12 V		-5 V			
	Current	1.41 A		2.42 A		0.24 A		0.13 A		0.04 A		0.05 A			
	USB	6 (2 x USB 3.2 Gen 1 via pin header, 2 x USB 2.0 via pin header, 2 x USB 2.0 type A connector)													
Environment	Serial	5 (4 x RS-232, 1 x RS-232/422/485)													
	SATA	4													
	M.2	1 (PCIe4 Gen 4 M-key 2280 type)													
	SPI	1 (Optional dTPM 2.0 module available)													
	GPIO	8-bit													
	Operating									Non-Operating					
Physical Characteristics	Temperature	0 ~ 60 °C (32 ~ 140 °F), depends on CPU loading and system thermal solution								-40 ~ 85 °C					
	Humidity	95% @ 40 °C, non-condensing								95% @ 60 °C, non-condensing					
Dimension (L x H)	304.8 x 244 mm (12" x 9.6")														

\* The PCIe x16 slot, from CPU, can only support graphic cards and storage cards according to the specification recommended by Intel. Other types of add-on cards might not work properly. For the compatible device list validated on the PCIe x16 slot, please refer to the user manual.

**Block Diagram**

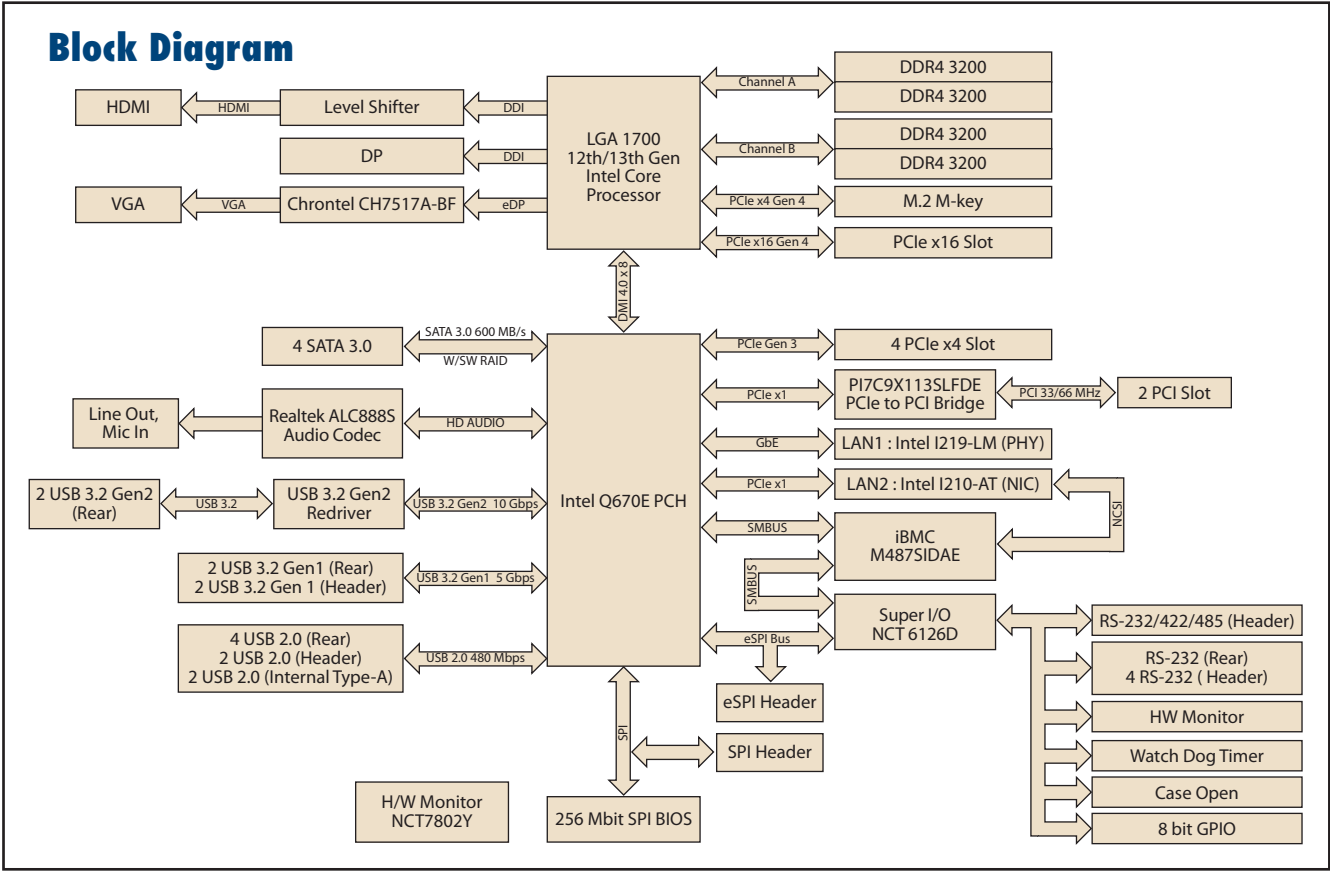

**Ordering Information**

Part number	Chipset	Memory	Display	USB 3.2 Gen 2	USB 3.2 Gen 1	USB 2.0	COM	GbE LAN	AMT	M.2	SATA 3.0	SW RAID	iBMC
AIMB-788G2-00A1	Q670E	Non-ECC UDIMM DDR4 3200 up to 128 GB	VGA + HDMI + DP	2	4	8	6	2	Yes	1	4	Yes	Yes
AIMB-788G2-00A1U	Q670E	Non-ECC UDIMM DDR4 3200 up to 128 GB	VGA + HDMI + DP	2	4	8	6	2	Yes	1	4	Yes	Yes

**Packing List**

Part Number	Description	Qty
1700003194	SATA data cable	2
1960104181T001	I/O port bracket (for 2U chassis or higher)	1
2041078800	Startup manual	1

Note: Driver CD is not provided. Please visit Advantech support website for driver download.

**I/O View**



AIMB-788G2-00A1  
AIMB-788G2-00A1U

**Optional Accessories**

Part number	Description
1700002204	2-port USB 2.0 cable w/ BKT(27 cm)
1700028292-01	2-port USB 3.0 cable w/ BKT(30 cm)
1970005349T000	CPU cooler for 2U, 4U, and wallmount chassis (for CPU Base Power=35~125W)
1701090401	Single COM port cable(40 cm)
1701092300	Dual COM port cable(28.5 cm)
1700022749-11/ 1700022749-12/ 1700022749-13	SATA power cable
PCA-TPMSPI-00A1	dTPM 2.0 SPI module to enable TPM and vPro technologies

Note: Purchasing AIMB-788's proprietary CPU cooler from Advantech is highly recommended. Other brands' CPU coolers are NOT compatible with AIMB-788. Especially the cooler type with fan aside is not allowed to use on AIMB-788 due to heat dissipation on MOSFET.

**Riser Card**

Part Number	Description
AIMB-R430P-03A2E	2U riser card with 3 PCI expansion
AIMB-R431F-21A1E	2U riser card with 1 PCIe x16 & 1 PCIe x1 expansion
AIMB-R43PF-21A1E	2U riser card with 1 PCIe x16 & 2 PCIe x1 expansion
AIMB-R4301-03A2E	2U riser card with 1 PCIe x1 expansion

Note: AIMB-788 is not compatible with 1U chassis.