


# AIMB-788

## LGA1700 ATX Motherboard Supporting 12/13/14th Gen & Intel® Core™ Processor Series 2, with DP/HDMI/VGA, DDR4, USB 3.2, M.2

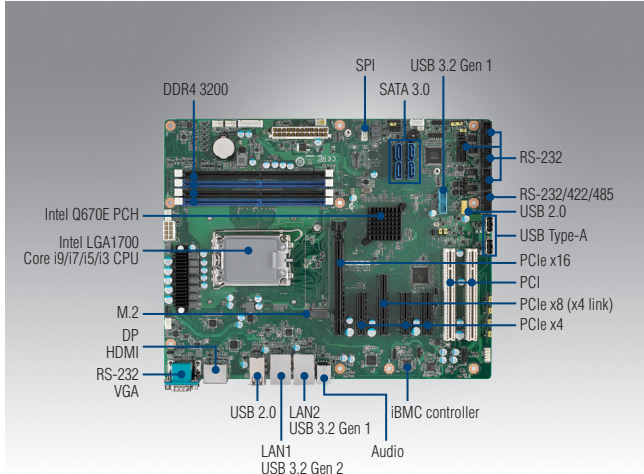

### Features

- Intel® 12th/13th/14th generation Core™ i9/i7/i5/i3 processor & Intel® Core™ Processor Series 2 with Q670E chipset
- Four DIMM sockets up to 128 GB DDR4 3200
- Triple display DP/HDMI/VGA and dual GbE LAN
- M.2, SATA RAID 0, 1, 5, 10, USB 3.2 Gen 2
- Advantech iBMC remote out-of-band power management solution on DeviceOn
- AWS (Amazon Web Service) IoT Greengrass qualified

Note 1: Legacy platform is not supported.

Note 2: dTPM 2.0 module is required to enable Intel vPro and TPM technologies.

Note 3: Intel® Platform Trust Technology (Intel® PTT) ready for Windows 11.


### Quiet Specifications



Intel® Core™ Processors Series 2 (Bartlett Lake-S)	CPU	251E	251TE	221E	221TE	211E	211TE	211EF	201E	201TE	300	300T		
	P-core Base Frequency	2.1 GHz	1.4 GHz	2.7 GHz	1.8 GHz	2.7 GHz	1.7 GHz	2.7 GHz	3.6 GHz	2.9 GHz	3.9 GHz	3.4 GHz		
	L3 Cache	36 MB	36 MB	24 MB	24 MB	20 MB	20 MB	20 MB	12 MB	12 MB	6 MB	6 MB		
	Cores	24	24	14	14	10	10	10	4	4	2	2		
14th Generation Processors	CPU	i9-14900	i9-14900T	i7-14700	i7-14701E	i7-14700T	i5-14500	i5-14501E	i5-14500T	i5-14400	i5-14400T	i5-14400F	i3-14100	i3-14100T
	P-core Base Frequency	2.0 GHz	1.1 GHz	2.1 GHz	2.6GHz	1.3GHz	2.6 GHz	3.3GHz	1.7 GHz	2.5 GHz	1.5 GHz	2.5 GHz	3.5 GHz	2.7 GHz
	L3 Cache	36 MB	36 MB	33 MB	16MB	33 MB	24 MB	24MB	24 MB	20 MB	20 MB	20 MB	12 MB	12 MB
	Cores	24	24	20	8	20	14	6	14	10	10	10	4	4
13th Generation Processors	CPU	i9-13900(E)	i9-13900TE	i7-13700(E)	i7-13700T(E)	i5-13500(E)	i5-13500T(E)	i5-13400(E)	i3-13100(E)	i3-13100T(E)				
	P-core Base Frequency	2.0 GHz	1.1 GHz	2.1 GHz	1.4 GHz	2.5 GHz	1.6 GHz	2.5 GHz	3.4 GHz	2.5 GHz				
	L3 Cache	36 MB	36 MB	30 MB	30 MB	24 MB	24 MB	20MB	12 MB	12 MB				
	Cores	24	24	16	16	14	14	10	4	4				
12th Generation Processors	CPU	i9-12900(E)	i9-12900TE	i7-12700(E)	i7-12700TE	i5-12500(E)	i5-12400	i5-12500TE	i3-12100(E)	i3-12100TE	Pentium G7400E	Pentium G7400TE	Celeron G6900E	Celeron G6900TE
	P-core Base Frequency	2.4 GHz	1.1 GHz	2.1 GHz	1.4 GHz	3.0 GHz	2.5 GHz	1.9 GHz	3.3 GHz	2.1 GHz	3.6 GHz	3.0 GHz	3.0 GHz	2.4 GHz
	L3 Cache	30 MB	30 MB	25 MB	25 MB	18 MB	18 MB	18 MB	12 MB	12 MB	6 MB	6 MB	4 MB	4 MB
	Cores	16	16	12	12	6	6	6	4	4	2	2	2	2
Processor System	Socket	LGA 1700												
	Chipset	Q670E												
Expansion Slot	BIOS	AMI 256Mbit SPI Flash												
	PCI	2												
Memory	PCIe x4 (Gen 3)	3												
	PCIe x8 (Gen 3)	1 (x4 link)												
	PCIe x16 (Gen 4)*	1												
	Technology	Dual Channel DDR4 3200 Non-ECC UDIMM												
Graphics	Max Capacity	128 GB												
	Sockets	4 x 288-pin DIMM												
Ethernet	Controller	Chipset Integrated Intel UHD Graphics												
	VRAM	Shares system memory is subjected to OS												
SATA	Interface	10/100/1000 Mbps												
	Connector	2 x RJ-45												
Rear I/O	Max. Data Transfer Rate	600 MB/s												
	Channel	4												
	RAID	0, 1, 5, 10												
	VGA	1 (Resolution up to 1920 x 1200 @ 60Hz)												
Watchdog Timer	HDMI	1 (Resolution up to 3840 x 2160 @ 60Hz)												
	DisplayPort	1 (Resolution up to 4096 x 2304 @ 60Hz)												
	Ethernet	2												
	USB	8 (2 x USB 3.2 Gen 2, 2 x USB 3.2 Gen 1, 4 x USB 2.0)												
	Audio	2 (Line-out, Mic-in)												
	Serial	1 (RS-232)												
Power Requirement	Output Interval	System reset												
	Interval	Programmable 1 – 255 sec												
Internal Connectors	Power On	Intel Core i 65W , DDR4 32 GB x 4												
	Voltage	+3.3 V												
	Current	1.41 A												
Environment	USB	6 (2 x USB 3.2 Gen 1 via pin header, 2 x USB 2.0 via pin header, 2 x USB 2.0 type A connector)												
	Serial	5 (4 x RS-232, 1 x RS-232/422/485)												
	SATA	4												
	M.2	1 (PCIex4 Gen 4 M-key 2280 type)												
	SPI	1 (Optional dTPM 2.0 module available)												
	GPIO	8-bit												
Physical Characteristics	Operating Temperature	0 - 60 °C (32 - 140 °F), depends on CPU loading and system thermal solution												
	Humidity	95% @ 40 °C, non-condensing												
	Dimension (L x H)	304.8 x 244 mm (12" x 9.6")												

\* The PCIe x16 slot, from CPU, can only support graphic cards and storage cards according to the specification recommended by Intel. Other types of add-on cards might not work properly. For the compatible device list validated on the PCIe x16 slot, please refer to the user manual.

### Block Diagram

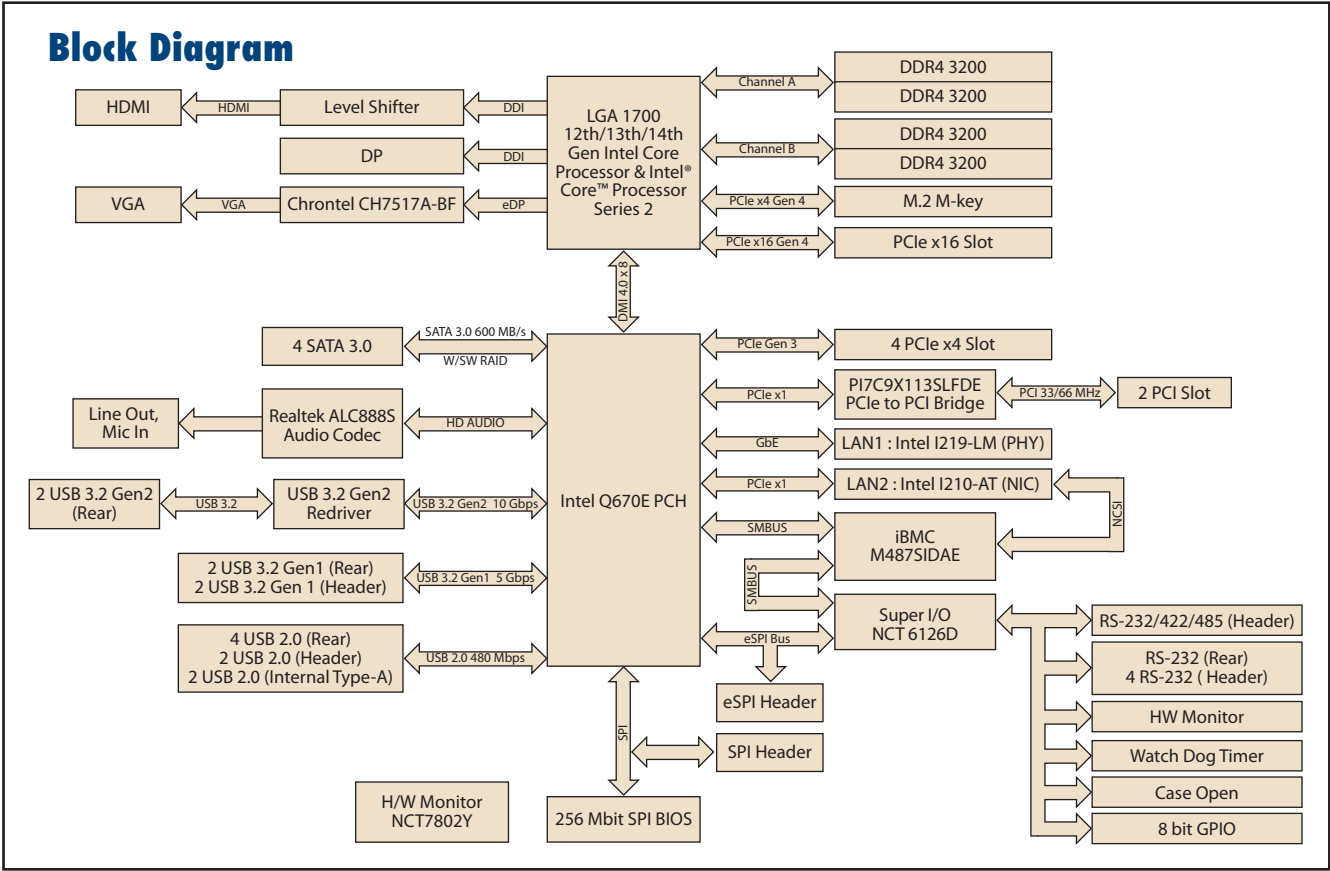

### Ordering Information

Part number	Chipset	Memory	Display	USB 3.2 Gen 2	USB 3.2 Gen 1	USB 2.0	COM	GbE LAN	AMT	M.2	SATA 3.0	SW RAID	iBMC
AIMB-788G2-00A1	Q670E	Non-ECC UDIMM DDR4 3200 up to 128 GB	VGA + HDMI + DP	2	4	8	6	2	Yes	1	4	Yes	Yes
AIMB-788G2-00A1U	Q670E	Non-ECC UDIMM DDR4 3200 up to 128 GB	VGA + HDMI + DP	2	4	8	6	2	Yes	1	4	Yes	Yes

### Packing List

Part Number	Description	Qty
1700003194	SATA data cable	2
1960104181T001	I/O port bracket (for 2U chassis or higher)	1
2041078800	Startup manual	1

Note: Driver CD is not provided. Please visit Advantech support website for driver download.

### Embedded OS

Part Number	Description
20706WX1HS0038	img W10 21HL AIMB-788 64b 21H2 ENU
20706WX1VS0038	img W10 21VL AIMB-788 64b 21H2 ENU
20706WX1ES0038	img W10 21EL AIMB-788 64b 21H2 ENU
20706WLH1S0035	img W11 24HL AIMB-788 64b 24H2 ENU
20706WL1S0035	img W11 24VL AIMB-788 64b 24H2 ENU
20706WLE1S0035	img W11 24EL AIMB-788 64b 24H2 ENU
20706U22DS0011	img UbuntuD AIMB-788 64b 22.04 ENU

### I/O View



AIMB-788G2-00A1  
AIMB-788G2-00A1U

### Optional Accessories

Part number	Description
1700002204	2-port USB 2.0 cable w/ BKT(27 cm)
1700028292-01	2-port USB 3.0 cable w/ BKT(30 cm)
1970005349T000	CPU cooler for 2U, 4U, and wallmount chassis (for CPU Base Power=35~65W)
1970005436T001	CPU cooler for 2U, 4U, and wallmount chassis (for CPU Base Power=125W)
1701090401	Single COM port cable(40 cm)
1701092300	Dual COM port cable(28.5 cm)
1700022749-11/ 1700022749-12/ 1700022749-13	SATA power cable
PCA-TPMSPI-00A1	dTPM 2.0 SPI module to enable TPM and vPro technologies

### Riser Card

Part Number	Description
AIMB-R430P-03A2E	2U riser card with 3 PCI expansion
AIMB-R431F-21A1E	2U riser card with 1 PCIe16 & 1 PCIe1 expansion
AIMB-R43PF-21A1E	2U riser card with 1 PCIe16 & 2 PCI expansion
AIMB-R4301-03A2E	2U riser card with 1 PCIe1 expansion

Note: AIMB-788 is not compatible with 1U chassis.