


AIMB-788

LGA1700 ATX Motherboard Supporting 12/13/14th Gen & Intel® Core™ Processor Series 2, with DP/HDMI/VGA, DDR4, USB 3.2, M.2

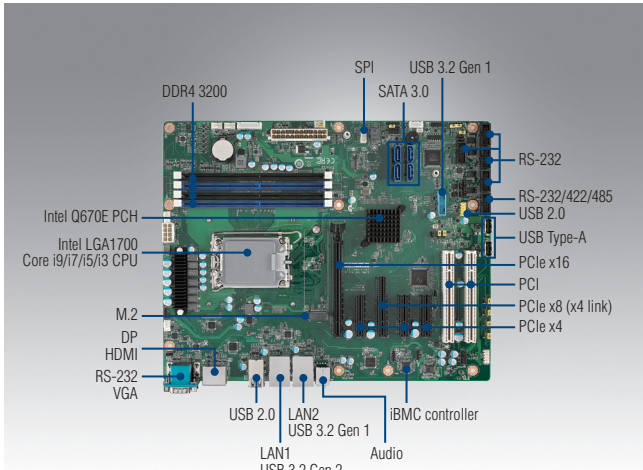

Features

- Intel® 12th/13th/14th generation Core™ i9/i7/i5/i3 processor & Intel® Core™ Processor Series 2 with Q670E chipset
- Four DIMM sockets up to 128 GB DDR4 3200
- Triple display DP/HDMI/VGA and dual GbE LAN
- M.2, SATA RAID 0, 1, 5, 10, USB 3.2 Gen 2
- Advantech iBMC remote out-of-band power management solution on DeviceOn
- AWS (Amazon Web Service) IoT Greengrass qualified

Note 1: Legacy platform is not supported.

Note 2: dTPM 2.0 module is required to enable Intel vPro and TPM technologies.


Note 3: Intel® Platform Trust Technology (Intel® PTT) ready for Windows 11.

Quiet Specifications



Intel® Core™ Processors Series 2 (Bartlett Lake-S) (P-Core Only)	CPU	Core 9 273PE	Core 9 273PTE	Core 7 253PE	Core 7 253PTE	Core 5 223PE	Core 5 223PTE	Core 5 213PE	Core 5 213PEF	Core 5 213PTE							
	P-core Base Frequency	2.3 GHz	1.4 GHz	2.5 GHz	1.8 GHz	2.9 GHz	2.3 GHz	2.7 GHz	2.7 GHz	2.1 GHz							
	L3 Cache	36 MB	36 MB	33 MB	33 MB	24 MB	24 MB	24 MB	24 MB	24 MB							
	Cores	12	12	10	10	8	8	8	8	8							
	Processor Base Power	65W	45W	65W	45W	65W	45W	65W	65W	45W							
Intel® Core™ Processors Series 2 (Bartlett Lake-S)	CPU	251E	251TE	221E	221TE	211E	211TE	211EF	201E	201TE	300	300T					
	P-core Base Frequency	2.1 GHz	1.4 GHz	2.7 GHz	1.8 GHz	2.7 GHz	1.7 GHz	2.7 GHz	3.6 GHz	2.9 GHz	3.9 GHz	3.4 GHz					
	L3 Cache	36 MB	36 MB	24 MB	24 MB	20 MB	20 MB	20 MB	12 MB	12 MB	6 MB	6 MB					
	Cores	24	24	14	14	10	10	10	4	4	2	2					
	Processor Base Power	65W	45W	65W	45W	65W	45W	65W	60W	45W	46W	35W					
14th Generation Processors	CPU	19-14900	19-14900T	17-14700	17-14701E	17-14700T	15-14500	15-14501E	15-14500T	15-14400	15-14400T	15-14400F	13-14100	13-14100T			
	P-core Base Frequency	2.0 GHz	1.1 GHz	2.1 GHz	2.6GHz	1.3GHz	2.6 GHz	3.3GHz	1.7 GHz	2.5 GHz	1.5 GHz	3.5 GHz	2.7 GHz				
	L3 Cache	36 MB	36 MB	33 MB	16MB	33 MB	24 MB	24MB	24 MB	20 MB	20 MB	20 MB	12 MB	12 MB			
	Cores	24	24	20	8	20	14	6	14	10	10	4	4				
	Processor Base Power	65 W	35 W	65 W	65W	35 W	65 W	65W	35 W	65 W	35 W	60 W	35 W				
13th Generation Processors	CPU	19-13900(E)	19-13900TE	17-13700(E)	17-13700T(E)	15-13500(E)	15-13500T(E)	15-13400(E)	13-13100(E)	13-13100T(E)							
	P-core Base Frequency	2.0 GHz	1.1 GHz	2.1 GHz	1.4 GHz	2.5 GHz	1.6 GHz	2.5 GHz	3.4 GHz	2.5 GHz							
	L3 Cache	36 MB	36 MB	30 MB	30 MB	24 MB	24 MB	20MB	12 MB	12 MB							
	Cores	24	24	16	16	14	14	10	4	4							
	Processor Base Power	65 W	35 W	65 W	35 W	65 W	35 W	65W	60 W	35 W							
12th Generation Processors	CPU	19-12900(E)	19-12900TE	17-12700(E)	17-12700TE	15-12500(E)	15-12400	15-12500TE	13-12100(E)	13-12100TE	Pentium G7400E	Pentium G7400TE	Celeron G6900E	Celeron G6900TE			
	P-core Base Frequency	2.4 GHz	1.1 GHz	2.1 GHz	1.4 GHz	3.0 GHz	2.5 GHz	1.9 GHz	3.3 GHz	2.1 GHz	3.6 GHz	3.0 GHz	3.0 GHz	2.4 GHz			
	L3 Cache	30 MB	30 MB	25 MB	25 MB	18 MB	18 MB	18 MB	12 MB	12 MB	6 MB	6 MB	4 MB	4 MB			
	Cores	16	16	12	12	6	6	6	4	4	2	2	2	2			
	Processor Base Power	65 W	35 W	65 W	35 W	65 W	65 W	35 W	60 W	35 W	46 W	35 W	46 W	35 W			
Processor System	Socket	LGA 1700															
	Chipset	Q670E															
	BIOS	AMI 256Mbit SPI Flash															
Expansion Slot	PCI	2															
	PCIe x4 (Gen 3)	3															
	PCIe x8 (Gen 3)	1 (x4 link)															
	PCIe x16 (Gen 4)*	1															
Memory	Technology	Dual Channel DDR4 3200 Non-ECC UDIMM															
	Max Capacity	128 GB															
	Sockets	4 x 288-pin DIMM															
Graphics	Controller	Chipset integrated Intel UHD Graphics															
	VRAM	Shares system memory is subjected to OS															
Ethernet	Interface	10/100/1000 Mbps															
	Controller	GbE LAN1: Intel I219-LM (PHY); GbE LAN2: Intel I210-AT															
	Connector	2 x RJ-45															
SATA	Max. Data Transfer Rate	600 MB/s															
	Channel	4															
	RAID	0, 1, 5, 10															
Rear I/O	VGA	1 (Resolution up to 1920 x 1200 @ 60Hz)															
	HDMI	1 (Resolution up to 3840 x 2160 @ 60Hz)															
	DisplayPort	1 (Resolution up to 4096 x 2304 @ 60Hz)															
	Ethernet	2															
	USB	8 (2 x USB 3.2 Gen 2, 2 x USB 3.2 Gen 1, 4 x USB 2.0)															
	Audio	2 (Line-out, Mic-in)															
	Serial	1 (RS-232)															
Watchdog Timer	Output	System reset															
	Interval	Programmable 1 ~ 255 sec															
Power Requirement	Power On	Intel Core i 65W, DDR4 32 GB x 4															
	Voltage	+3.3 V			+5 V			+12 V			+5 Vsb			-12 V		-5 V	
	Current	1.41 A			2.42 A			0.24 A			0.13 A			0.04 A		0.05 A	
Internal Connectors	USB	6 (2 x USB 3.2 Gen 1 via pin header, 2 x USB 2.0 via pin header, 2 x USB 2.0 type A connector)															
	Serial	5 (4 x RS-232, 1 x RS-232/485)															
	SATA	4															
	M.2	1 (PCle4 Gen 4 M-key 2280 type)															
	SPI	1 (Optional dTPM 2.0 module available)															
	GPIO	8-bit															
Environment	Operating																
	Temperature	0 ~ 60 °C (32 ~ 140 °F), depends on CPU loading and system thermal solution								Non-Operating							
	Humidity	95% @ 40 °C, non-condensing								~40 ~ 85 °C							
										95% @ 60 °C, non-condensing							
Physical Characteristics	Dimensions (L x W x H)	204.8 x 244 mm (12" x 9.6")															

Block Diagram

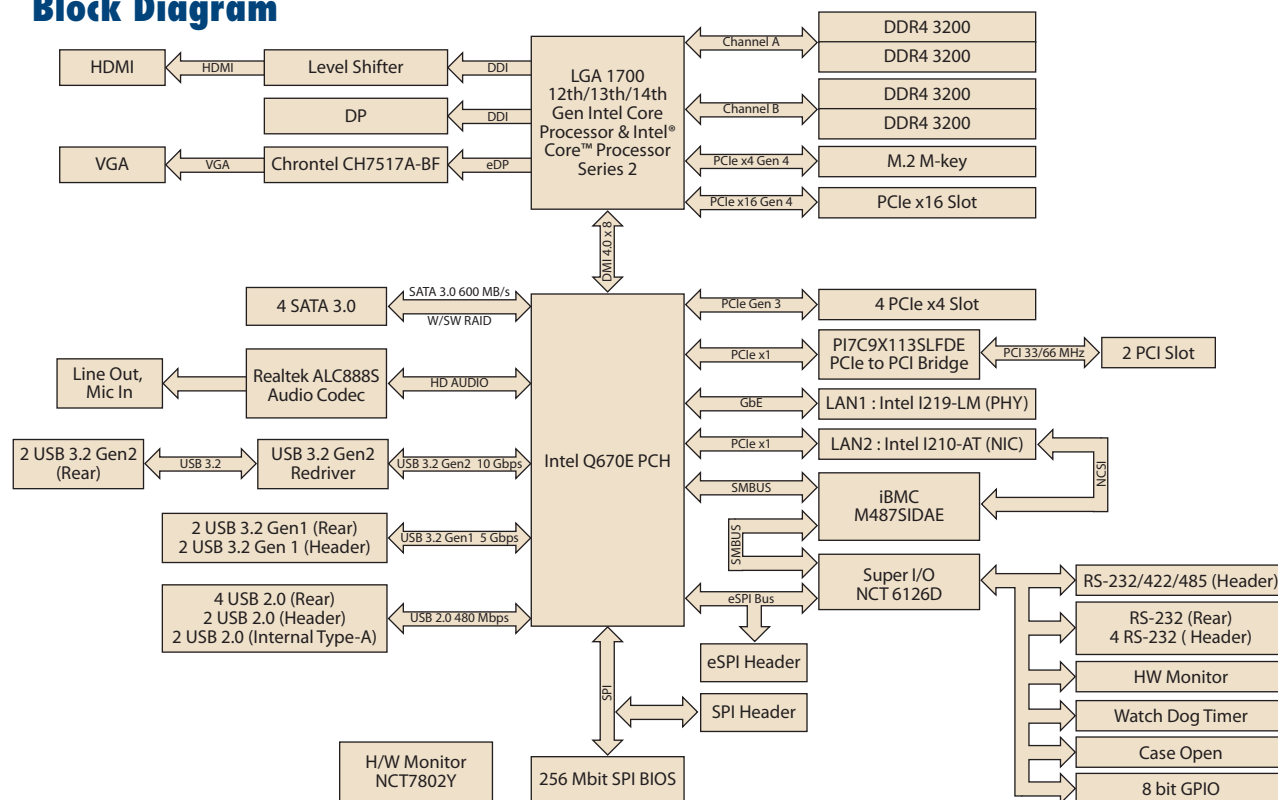

Ordering Information

Part number	Chipset	Memory	Display	USB 3.2 Gen 2	USB 3.2 Gen 1	USB 2.0	COM	GbE LAN	AMT	M.2	SATA 3.0	SW RAID	iBMC
AiMB-788G2-00A1	Q670E	Non-ECC UDIMM up to 128 GB	VGA + HDMI + DP	2	4	8	6	2	Yes	1	4	Yes	Yes
AiMB-788G2-00A1U	Q670E	Non-ECC UDIMM up to 128 GB	VGA + HDMI + DP	2	4	8	6	2	Yes	1	4	Yes	Yes

Packing List

Part Number	Description	Qty
1700003194	SATA data cable	2
1960104181T051	I/O port bracket (for 2U chassis or higher)	1
2041078800	Startup manual	1

Note: Driver CD is not provided. Please visit Advantech support website for driver download.

Embedded OS

Part Number	Description
20706WX1HS0038	img W10 21HL AIBM-788 64b 21H2 ENU
20706WX1VS0038	img W10 21VL AIBM-788 64b 21H2 ENU
20706WX1ES0038	img W10 21EL AIBM-788 64b 21H2 ENU
20706WLH1S0035	img W11 24HL AIBM-788 64b 24H2 ENU
20706WLVL1S0035	img W11 24VL AIBM-788 64b 24H2 ENU
20706WLE1S0035	img W11 24EL AIBM-788 64b 24H2 ENU
20706U22DS0011	img UbuntuD AIBM-788 64b 22.04 ENU

I/O View

AIMB-788G2-00A1
AIMB-788G2-00A1U

Optional Accessories

Part number	Description
1700002204	2-port USB 2.0 cable w/ BKT(27 cm)
1700028292-01	2-port USB 3.0 cable w/ BKT(30 cm)
1970005349T000	CPU cooler for 2U, 4U, and wallmount chassis (for CPU Base Power=35~65W)
1970005436T001	CPU cooler for 2U, 4U, and wallmount chassis (for CPU Base Power=125W)
1970005934N001	CPU cooler for 4U chassis (for CPU Base Power = 125W)
1701090401	Single COM port cable(40 cm)
1701092300	Dual COM port cable(28.5 cm)
1700022749-11/ 1700022749-12/ 1700022749-13	SATA power cable
PCA-TPMSP1-00A1	dTPM 2.0 SPI module to enable TPM and vPro technologies

Riser Card

Part Number	Description
AIMB-R430P-03A2E	2U riser card with 3 PCI expansion
AIMB-R431F-21A1E	2U riser card with 1 PClex16 & 1 PClex1 expansion
AIMB-R43PF-21A1E	2U riser card with 1 PClex16 & 2 PCI expansion
AIMB-R4301-03A2E	2U riser card with 1 PClex1 expansion

Note: AIMB-788 is not compatible with 1U chassis.