

ARK-2121F A2

Intel® Celeron® Quad Core J1900 SoC with Multiple I/Os Fanless Box PC



Features

- Intel® Celeron® J1900 Quad Core 2.0 GHz SoC with Turbo boost support
- VGA and HDMI dual independent display
- 6 x COM, 6 x USB, isolated DIO
- 9 ~ 36 V_{DC} wide range power input
- -20 ~ 70° C extend temperature operating
- Mini PCIe expansion with SIM holder for communication module
- mSATA and 1 x 2.5" SATA storage device
- Optional DVI/2nd HDMI/4x GbE by project support
- Internal USB for security dongle



Specifications


		ARK-2121F-U0A2E
Processor System	CPU	Intel Celeron Processor J1900 Quad Core SoC
	Frequency	2.0 GHz, turbo boost up to 2.42 GHz
	L2 Cache	2 MB
	BIOS	AMI EFI
Memory	Technology	DDR3L 1333 MHz
	Max. Capacity	8 GB
	Socket	1 x 204-pin SO-DIMM
Graphics	Chipset	Intel Celeron J1900 SoC integrated, 7th Gen. Intel Graphic core
	Graphic Engine	DirectX 11.1, OCL 1.2, OGL 3.2 Encode: H.264, MPEG2/4, VC1, WMV9 Decode: H.264, MPEG2
	VGA	Up to 2048 x 1152 @ 60Hz
	HDMI	1 HDMI port (default), HDMI 1.4a for HD video playback, 1080P at 60Hz (2nd HDMI support by project only)
	DisplayPort*	Up to 2560 x 1600 at 60Hz (by Project only)
Ethernet	LAN1/LAN2	10/100/1000Mbps Intel i210 GbE, support Wake On LAN, optional LAN3/LAN4 support by project
	LAN3/LAN4	Optional
	Dual Display	Yes, VGA + HDMI
IO Interface	Serial Ports	6 x RS-232/422/485 with auto flow control
	USB Interface	1 x USB 3.0, 5 x USB 2.0, 1 x internal USB 2.0 for security dongle
	PS/2	Yes (by project only)
Other	Watchdog timer	255 levels timer interval, setup by software
	Digital I/O	4ch digital input and 4ch digital output with 3kV isolation
Expansion	Mini PCIe	2 x full size Mini PCIe (1 with SIM holder) #1
	HDD	Supports one SATA 2.5" HDD Bay (Compatible with 12.5mm height HDD) (Max. Data Transfer Rate 600 MB/s)
Storage	mSATA	1 x full size mSATA socket, with USB signal co-lay
	Software Support	Microsoft Windows Linux
Power Requirement	Power Type	ATX
	Power Input Voltage	9 ~ 36 V _{DC}
	Minimum Power Input	12 V, 1.5 A
	Power Adapter	AC to DC, DC19 V/3.42 A, 65 W (Optional)
Power Consumption	Typical	8.4W
	Max.	16.2W
Mechanical	Construction	Aluminum housing
	Mounting	Din-Rail mounting, Desk/wall-mounting, VESA mounting
	Dimensions (W x H x D)	264.5 x 68.4 x 133.0 mm (10.41" x 2.69" x 5.24")
	Weight	2.3 kg (5.07 lb)
Environment	Operating Temperature	With extended temperature peripherals: -20 ~ 70° C (-4 ~ 158° F) with 0.7m/s air flow With 2.5-inch hard disk 0 ~ 45° C (32 ~ 112° F) with 0.7m/s air flow
	Storage Temperature	-40 ~ 85° C (-40 ~ 185° F)
	Relative Humidity	95% @ 40° C (non-condensing)
	Vibration During Operation	With SSD: 3 Grms, IEC 60068-2-64, random, 5 ~ 500 Hz, 1 hr/axis.
	Shock During Operation	With SSD: 30 G, IEC 60068-2-27, half sine, 11 ms duration
	EMC	CE/FCC Class A, CCC, BSMI
	Safety Certifications	UL, CB, CCC, BSMI

* DisplayPort is supported by project only.


#1 SIM holder is the hardware interface for wireless communication integration only. System level RF certification is not available.

Dimensions


Unit: mm

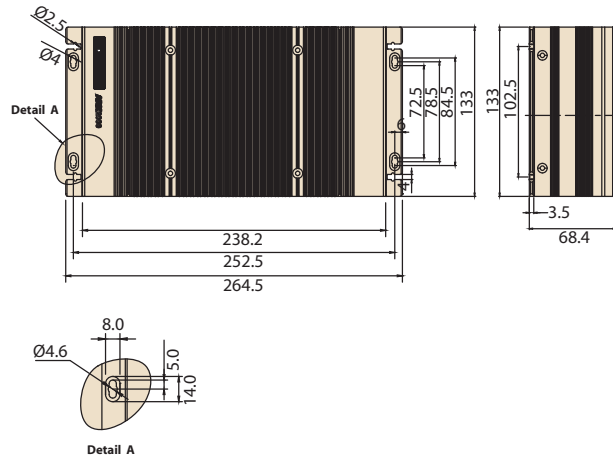


VESA mount




Wall mount




DIN Rail



Front Panel External I/O Mechanical Layout/Drawing

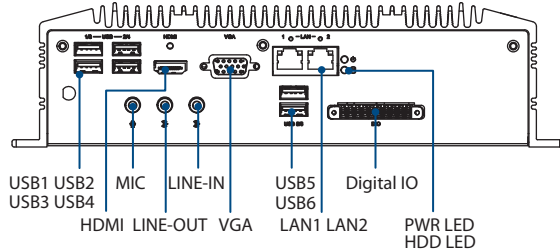

Rear Panel External I/O Mechanical Layout/Drawing

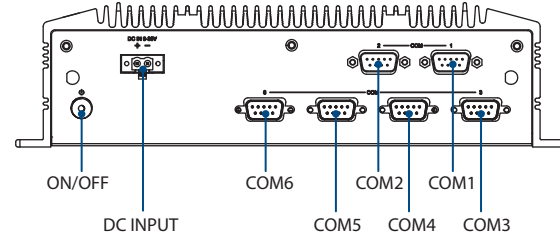

Ordering Information

Part No.	CPU	VGA	HDMI/DP*	GbE	USB 2.0	USB 3.0	RS-232/422/485	Audio	Full-size MiniPCIe	SIM	mSATA	2.5" SATA II HDD Bay	Power Input	Operating Temp.
ARK-2121F-U0A2E	Intel Celeron J1900 2.0GHz	Yes	Yes	2	5	1	6	Lin-out, Line-in, MIC	2	1	1	1	9 - 36 V _{DC}	-20 - 70° C

Note: Memory, storage and operating system bundled by request.
*DP is support by project only.

Packing List

Part Number	Description
-	1 x ARK-2121 Unit
-	1 x User Manual (Simplified Chinese)
-	1 x China RoHS
1700009001	1x 2-pin Phoenix to DC-Jack power cable
1960069484N000	2 x LAN clip

Embedded OS

Part Number	Description
20706WE7ES0020	WES7E ARK-2121F 64b 1709 ASIA 4 MUI
2070013716	WES8E 64bit ENG/JP/TC/SC
20706WE7PS0020	WES7P ARK-2121F 64b 1709 10 MUI
20706WX9ES0129	W10 19EL ARK-2121F 64b 1809 ENU

Optional Items

Part Number	Description
96PSA-A65W19P2-1	AC-to-DC Adapter, DC 19V/3.42A 65W, 0 ~ 40° C for Home and Office Use
1700001524	Power cable 3-pin 183cm, USA type
170203183C	Power cable 3-pin 183cm, EU type
170203180A	Power cable 3-pin 183cm, UK type
AMK-V019E	VESA mounting kit
AMK-R005E	DIN-rail mounting kit
1652003235	10pin DIO Plug in block