


BB-422LCON

RS-232 to RS-422 Converter

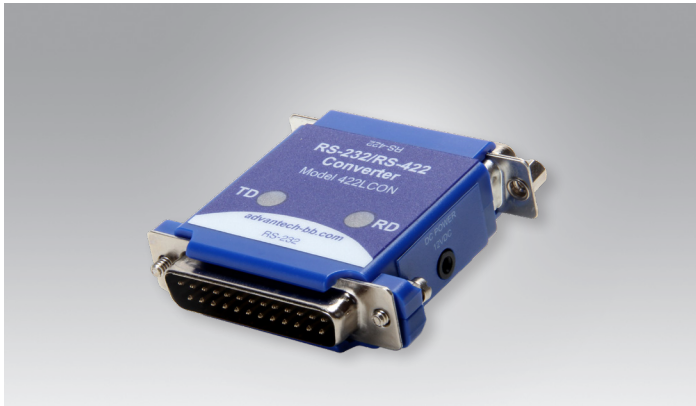

Introduction

Model BB-422LCON, non-isolated serial converter, converts unbalanced RS-232 signals to balanced RS-422 signals. The RS-422 Standard uses a balanced voltage digital interface to allow communications of 90K bits per second on cable lengths of 1200 meters (4000 ft). Ten receivers can be connected to any one driver for use in multi-drop systems.

The RS-232 port is a male DB-25 connector with pins 2 (TD input) and 3 (RD output) supported. Protective Ground (pin 1) and Signal Ground (pin 7) are also connected. The RS-422 port uses a female DB-25 connector with the Send Data outputs on pins 2 and 14, and the Receive Data inputs on pins 5 and 17. Protective Ground (pin 1) and Signal Ground (pin 7) are connected through to the RS-232 connector.

Interconnection of the converter with another RS-422 device:

The polarity of the two RS-422 lines must be correct. With no data being sent, the RS-232 line should be negative and the RS-422 "A" terminal should be negative with respect to the "B" terminal.

The RS-422 Standard wire recommended is number 24 AWG copper conductor, twisted-pair telephone cable with a shunt capacitance of 16 pF per foot.

For long runs and/or high data rates, it is recommended that the wires be terminated with a resistor at the receive end. The twisted pair usually used has an impedance of about 100 Ohms, therefore a 100 Ohm resistor is normally used for the termination. The RS-422 side of the converter requires more power as the transmission line is increased and as the termination resistor value is reduced, therefore it may be necessary to use a termination resistor that is greater than 100 Ohms.

The RS-422 driver has the ability to drive ten RS-422 receivers connected in parallel. A system of multiple receivers may require some experimentation with location and size of termination resistors, line lengths, grounding, etc.

The RS-422 Standard recommends that Protective Ground (pin 1) be connected to a good "green wire" ground. This may be already connected in your RS-232 equipment. Protective Ground and Signal Ground should be connected through to each end of the system and be connected to each other using a 100 Ohm 0.5 Watt resistor at one end only. If a shielded twisted pair is used, the shield be connected to Protective Ground.

Features

- Converts unbalanced RS-232 signals to balanced RS-422 signals
- Data rates up to 90 kbps
- Extends RS-232 line up to 1200 meters (4000 ft)
- RS-422 driver can drive ten RS-422 receivers in parallel (for use in multidrop systems)
- Power supply required (not included, sold separately)

Ordering Information

| Model No. | Description | RS-232 Connector | RS-422 Connector |
|------------|----------------------------|------------------|------------------|
| BB-422LCON | RS-232 to RS-422 Converter | DB25 Male | DB25 Female |

Accessories – Sold Separately

BB-SMI6B12V-P230C1 – Power Supply, 12 Vdc 6 W, 2.5mm plug, International AC Input, International AC Blades (NATAM, EU, UK, Australia, China)

Specifications

| Serial Technology | |
|----------------------------------|--|
| RS-232 Connector | DB25 male |
| RS-422 Connector | DB25 female |
| Data Rate | Up to 90 Kbps baud |
| Signals | TD, RD |
| Power | |
| Power Requirement | 12 Vdc @ 100 mA, external power source (not included, sold separately) |
| Meantime Between Failures (MTBF) | |
| MTBF | 8888099 hours |
| Calculation Method | MIL 217F using Parts Count Reliability Prediction Method |

| Regulatory – Approvals / Standards / Directives | |
|---|---|
| FCC, CE | |
| CE - Directives | 2014/30/EU - Electromagnetic Compatibility Directive (ECD) 2011-65/EU - amended by (EU) 2015/863 Reduction of Hazardous Substances Directive (RoHS) 2012/19/EU - Waste Electrical and Electronic Equipment (WEEE) |
| CE - Standards | EN 55032 Class B - Electromagnetic Compatibility of Multimedia Equipment - Emission Requirements EN 55024 Information Technology Equipment - Immunity Characteristics - Limits and Methods of Measurement |
| Other Standards | EN 61000-6-3 + A1 - Generic Emission Standard for Residential, Commercial & Light-industrial Environments (Class B) EN 61000-6-2 - Generic Immunity Standard for Industrial Environments |

Schematic

