


DVP-7012MHE

1-ch Full HD H.264 M.2 Video Capture Card with SDK

NEW

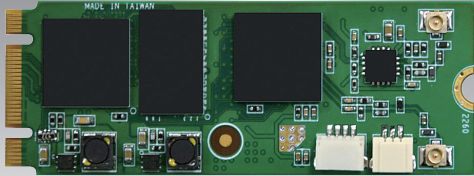

Features


- 1 channel SDI channel video inputs with H.264 software compression
- 30/25 fps (NTSC/PAL) at up to full HD resolution for recording and display
- PCIe M.2 (B/M) host interface
- Windows/Linux OS supported

FCC CE 

Specifications

Video	Video Standard	NTSC/PAL
	Video Input	1 x SDI
	Compression	S/W H.264
	Max. Resolution /FPS	30/25 fps @ 1920 x 1080p (Input) 30/25 fps @ 1920 x 1080p (Output)
Audio	Audio Input	SDI Embedded Audio Audio L/R (2 x RCA through wafer connector to RCA cable)
	Format	Stereo, 16-bit, 32 ~ 48 kHz
System Requirements	CPU (Display)	Intel® Core™ 2 Duo E2200 2.2 GHz
	CPU (Recording)	Intel® Core™ 2 Quad Q9400 2.6 GHz
	Memory	2 GB
	VGA	1024 x 768, DirectX 9.0c
Physical Characteristics	Operating System	Windows XP/XPe/Vista/7/8/8.1; Linux 2.6.14 or higher
	Host Interface	PCIe M.2 (B/M)
	Operating Temperature	-20 ~ 70 °C (-4 ~ 158 °F)
	Storage Temperature	-40 ~ 85 °C (-40 ~ 185 °F)
	Dimension (L x H)	22 x 60 mm (0.8" x 2.3")
	Certification	CE/FCC

Connection Diagram

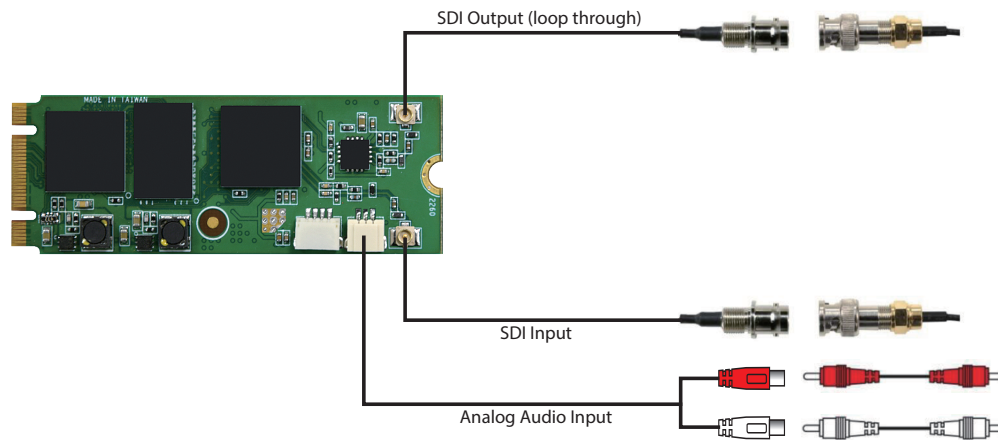

Ordering Information

Part Number	Description
DVP-7012MHE	1-ch Full HD H.264 PCIe M.2(B/N) Video Capture card with SDK
XKU0-A56-D009-V12	SDI Video cable (optional)

Packing List

Item	Amount
DVP-7012MHE Capture Card	1pcs