

ECU-1251

TI Cortex A8 Industrial Communication Gateway with 2 x LAN, 4 x COM Ports

NEW



CE FCC RoHS COMPLIANT PRODUCT

Features

- TI Cortex A8 800MHz CPU
- DDR3L256MB RAM
- 1GB Micro-SD card for system storage
- 1 x Micro-SD Slot
- 4 x RS-232/485 isolated serial ports
- 2 x 10/100 Base-T Ethernet ports
- 1 x Mini-PCle for WIFI/Cellular/4G
- Support web service for remotely on-line monitoring
- Support SD card & on-line firmware update
- Support IEC-61850, IEC-60870-101/104 protocol
- Support Data logger on SD card
- Operation System: RT-Linux
- Operation Temperature -40~70°C

Introduction

For solar power, electricity and factory related applications which require a total wireless and Ethernet communication solutions, Advantech has released the ECU-1251 RISC-based industrial communication gateway. ECU-1251 has an open platform design with Cortex A8 processor, up to four RS-232/485 isolated serial ports, two 10/100 Ethernet ports and operating temperature range of -40~70°C. With Linux operating system and open Edgelinek SDK, which enable to system integrators to develop applications which precisely fit their need.


Specifications

	ECU-1251TL-R10AAE	ECU-1251TL-R10ABE
System	CPU	TI Cortex A8, 800MHz
	RAM	DDR3L 256MB
	Storage	4GB Micro-SD card
	SD Slot	1 x Micro-SD
	Real Time Clock	Yes
	Watchdog Timer	Yes
	Node ID	Yes
	TPM	NA
I/O Interfaces	Serial Ports	4 x RS-232/485 isolation 3000VDC, 1 x 12-Pin Terminal Block, 50 ~ 115.2kbps
	LAN Ports	2 x 10/100 RJ-45
	USB Ports	1 x USB 2.0
	Displays	NA
	Mini-PCIE	1x Mini-PCIE (Full-size), Type: WIFI/Cellular/4G, Signal: USB 2.0
WISE-Edgelinek	Protocol Support	OPC-UA Client & Server, BACNet/IP Client & Server, Modbus RTU/TCP, IEC-61850*, IEC-60870-5-101, IEC-60870-5-103, IEC-60870-5-104
	PLC driver support	Siemens/Mitsubishi/Omron/Allen-Bradley, Delta etc 200+ PLC drivers
	Programming Support	Linux C, Python
	Configuration Tool	WISE-EdgeLink Studio
	Data Monitoring	2000 Tags MAX.
	Cloud Connectivity	WISE-Edge365, MQTT, AWS, Azure, LwM2M, Google Cloud IoT Core and more
	Database Transmission	SQL Server, MySQL, ORACLE, FTP Server
General	VPN	Open VPN
	Certification	CE, FCC, EN-62368-1, UKCA
	Dimensions (W x D x H)	140 x 96.5 x 30mm
	Form Factor	Small Size
	Enclosure	SGCC
	Mounting	Wall-Mount/DIN-Rail
	Weight(Net)	0.6kg
	Power Requirement	10 ~ 30 V _{DC}
	Power Consumption	2.2W @ 24V _{DC}
	Power Connector	1 x 3-Pin Terminal Block
Environment	Operating Temperature	-40~70°C
	Storage Temperature	-40~85°C
	Relative Humidity	5 ~ 95% (non-condensing)
	Ingress Protection	IP30
	Vibration Protection	2Grms, Random/Sine, 5 ~ 500Hz

*Please refer to the EdgeLink specification for further details. Activation of the IEC-61850 protocol requires an additional fee.

Dimensions

Unit: mm

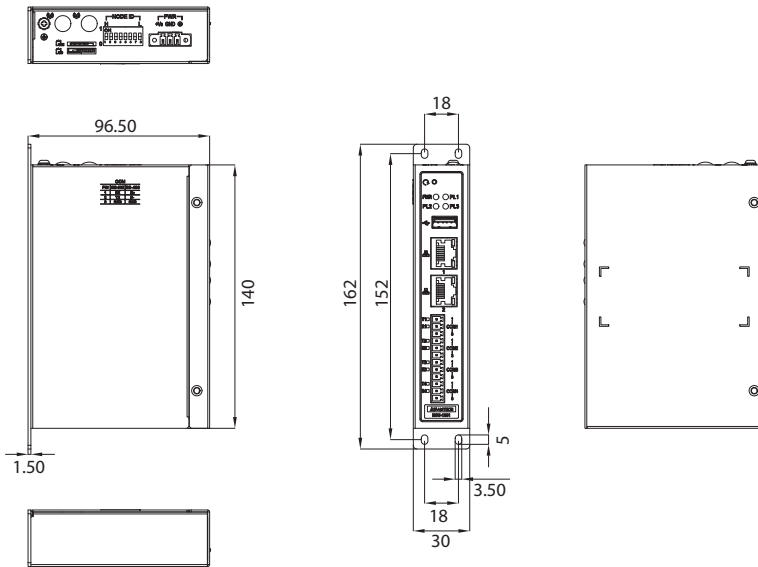

Ordering Information

Part Number	CPU	RAM	Storage for OS	OS	Configuration Tool	TPM 2.0	LAN	COM	USB	Console	Power Requirement	Country of Origin
ECU-1251TL-R10AAE	Ti Cortex A8, 800MHz	DDR3L 256MB	4GB	Yocto	WISE-EdgeLink	N/A	2	4	1	3pin COM on board	10 ~ 30 V _{DC}	China
ECU-1251TL-R10ABE	Ti Cortex A8, 800MHz	DDR3L 256MB	4GB	Yocto	WISE-EdgeLink	N/A	2	4	1	3pin COM on board	10 ~ 48 V _{DC}	Taiwan

Optional Accessory

Wi-Fi Solution

- **96PD-RYUW131A1** Wi-Fi 4 2.4GHz mPCIe with Antenna and cable
- **EWM-W172H01E** Wi-Fi 5+BT 4.2 Module 2.4/5GHz Mini PCIe
- **1750008717-01** Wi-Fi 2.4G+5G dipole antenna (Recommend qty: 2pcs)
- **1750006043** Wi-Fi Coaxial Cable, 150 mm (Recommend qty: 2pcs)
- **9656EWMG00E** Half-size miniPCIe to miniPCIe bracket set
- **EWM-W180H01E** Wi-Fi 5+BT 5.0 Module 2.4/5GHz Mini PCIe
- **1750008717-01** Wi-Fi 2.4G+5G dipole antenna (Recommend qty: 2pcs)
- **1750006043** Wi-Fi Coaxial Cable, 150 mm (Recommend qty: 2pcs)
- **9656EWMG00E** Half-size miniPCIe to miniPCIe bracket set

Cellular Solution (SIM card is not included)

- **96PD-EC25EFA** LTE Module Cat. 4, Mini-PCIe for EU,TW,IN,KR,SEA
- **96PD-EC25JFA** LTE Module Cat. 4, Mini-PCIe for JP
- **96PD-EG25GGB** LTE Module Cat. 4, Mini-PCIe for Global
- **1750006264** SMA(F) Cable, 15 cm
- **1751000532-01** Dipole Ant. LTE+5G 5.5dB SMA/M 135.7mm
- **96PD-MDG200AU0** AMIC 4G.Cat4 Socket Modem(US)
- **1750006264** SMA(F) Cable, 15 cm
- **1750008303-01** Antenna, 13cm

Storage Solution

- **96FMMSDI-4G-ET-AT1** ATP 4G MICRO SD CARD I-GRD SLC(G)
- **96FMMSDI-8G-ET-AT1** ATP 8G MICRO SD CARD I-GRD SLC(G)