

# EKI-1211

## 1-Port RS-232/422/485 Modbus Gateway



### Features

- 1 x 10/100 Mbps Ethernet port
- Integrates Modbus TCP and Modbus RTU/ASCII networks
- Baud rate: supports up to 230.4 Kbps
- Supports up to 16 connections per serial port under Modbus client mode and 32 sessions under Modbus server mode
- Built-in 8-kV ESD protection for all serial signals
- Software-selectable RS-232/422/485-2w/485-4w communication
- Supports 32/64-bit Windows 2000/XP/Vista/7/8/8.1/10, Windows Server 2003/2008/2012, and Linux

### Introduction

The EKI-1200 series Modbus gateways are bi-directional gateways for integrating new and existing Modbus/RTU and Modbus/ASCII serial devices to newer TCP/IP networked-based devices. The EKI-1211 feature one independent Ethernet ports and MAC address. It provides a simple and cost-effective way to bring remote management and data accessibility to thousands of devices that cannot otherwise connect to a network. The EKI-1200 series allow users to select client or server operation mode for each serial port. In addition to allowing an Ethernet client to control serial servers, they also allow serial client to control Ethernet servers.

### Specifications

#### Ethernet Communications

- **Compatibility** IEEE 802.3, IEEE 802.3u
- **Speed** 10/100 Mbps
- **No. of Ports** 1
- **Port Connector** 8-pin RJ45
- **Protection** Built-in 2.25 k V<sub>DC</sub> magnetic isolation

#### Serial Communications

- **Port Type** RS-232/422/485
- **No. of Ports** 1
- **Port Connector** DB9 male
- **Data Bits** 5, 6, 7, 8
- **Stop Bits** 1, 1.5, 2
- **Parity** None, Odd, Even, Space, Mark
- **Flow Control** XON/XOFF, RTS/CTS
- **Baud Rate** 300 bps ~ 230.4 kbps
- **Serial Signals** RS-232: TxD, RxD, CTS, RTS, GND  
RS-422: TxD+, TxD-, RxD+, RxD-, GND  
RS-485 2-wire: Data+, Data-, GND  
RS-485 4-wire: TxD+, TxD-, RxD+, RxD- GND
- **Protection** Built-in 8 KV ESD for all signals

#### Software

- **Driver Support** 32-bit/64-bit Windows 2000/XP/Vista/7/8/8.1/10, Windows Server 2003/2008/2012, and Linux
- **Operation Modes** Modbus ASCII Client/Server mode  
Modbus RTU Client/Server mode
- **Configuration** Windows utility
- **Protocols** ICMP, IP, TCP, UDP, BOOTP, DHCP, Auto IP, HTTP, DNS, SMTP, ARP, NTP

#### Mechanics

- **Dimensions (W x H x D)** 46 x 85.1 x 21.2 mm (1.81" x 3.35" x 0.83")
- **Enclosure** Metal with solid mounting hardware
- **Mounting** DIN-rail, Wall
- **Weight** 0.127 kg

#### General

- **LED Indicators** System: Power, System Status/LAN: Speed, Link/Active  
Serial: Tx, Rx

#### Power Requirements

- **Input** 9 ~ 36 V<sub>DC</sub>
- **Connector** Terminal block
- **Consumption** 1 W

#### Environment


- **Operating Temperature** -40 ~ 75 °C (-40 ~ 167 °F)
- **Storage Temperature** -40 ~ 85 °C (-40 ~ 185 °F)
- **Operating Humidity** 10 ~ 95% RH

#### Regulatory Approvals

- **EMC** CE, FCC Part 15 Subpart B (Class A)

## Dimensions

Unit: mm [inch]

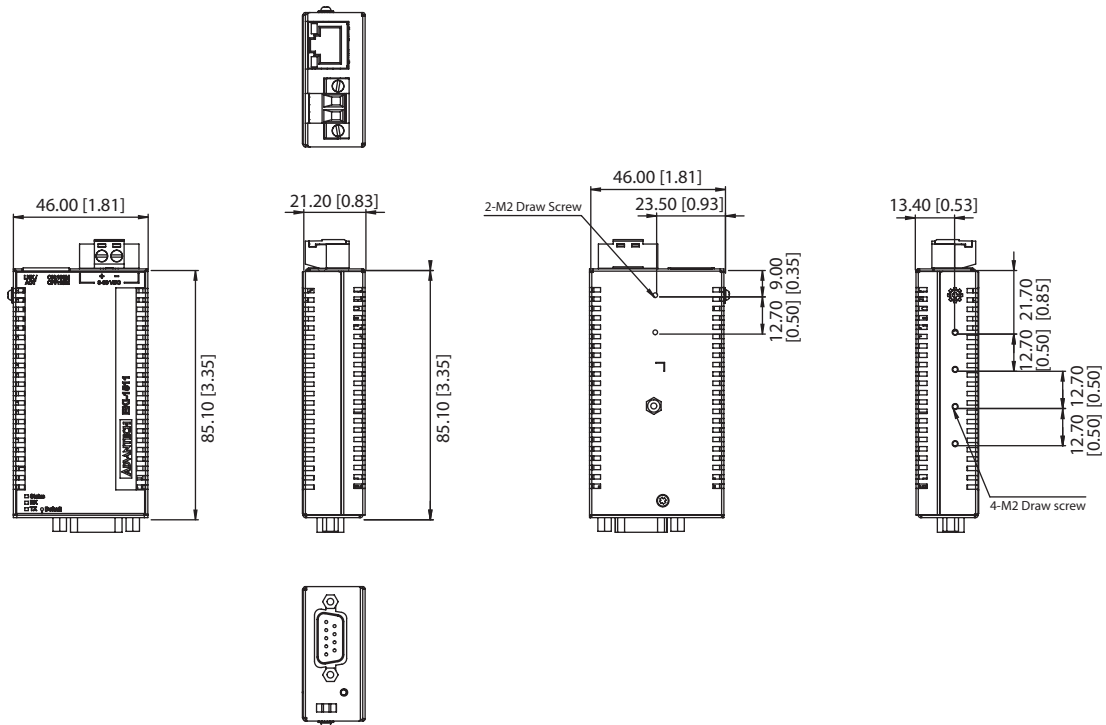

**Panel Cut-Out Dimensions: 46 x 85.1 x 21.2 (1.81 x 3.35 x 0.83)**

## Ordering Information

- **EKI-1211-A** 1-Port RS-232/422/485 Modbus Gateway
- **BB-RPS-v2-WR2-US** Power Adapter 12v 0.5A US
- **BB-RPS-v2-WR2-EU** Power Adapter 12v 0.5A Europe
- **BB-RPS-v2-WR2-UK** Power Adapter 12v 0.5A UK