

EKI-2706G-2FPI

EKI-2706G-2GPI

4GE + 2G SFP Port Gigabit Unmanaged Industrial PoE Ethernet Switch

6GE Port Gigabit Unmanaged Industrial PoE Ethernet Switch



Features

- 4 x Gigabit plus 2G SFP or 6 Gigabit RJ-45 Ethernet ports
- Support 4 x IEEE 802.3at/af PoE ports for PD demands
- Up to 30W output per PoE port
- Supports jumbo frame transmission up to 9k bytes
- DIN-rail with IP30 metal mechanism
- 12 ~ 48 V_{DC} redundant dual power input and 1 relay output
- Wide operating temperature range of -40 ~ 75°C
- Supports EMC Level 4 protection for extreme outdoor environments
- Supports LAN surge protection up to ±6 kV
- Equipped with a pull-down DIN rail mounting kit for easy installation across various DIN rail dimensions

Introduction

The EKI-2706G PoE switch is unmanaged Ethernet switches supporting 4 ports PoE+ (Power over Ethernet) and compliant with IEEE 802.3at/af standards. Provides up to 30 watts of power per port and fulfill the power budget of max.120 watts on system with the power input from 12-48V_{DC}. The switch provides a relay output for an event alarm which activates the alarm to notify administrators. Robust design for harsh environment, DIN-rail mounting and fast startup with plug and work.

The EKI-2706G supports IEEE 802.3/802.3u/802.3z/802.3ab/802.3x with 10/100/1000 Mbps, full/half-duplex, auto-negotiation and MDI/MDI-X auto-sensing to provide an economical solution for your industrial Ethernet network.

Specifications

Interfaces / Communications

- **I/O Port**
EKI-2706G-2FPI:
- 4 x 10/100/1000BASE-T/TX RJ-45
- 2 x SFP (mini-GBIC) 100/1000Mbps port
EKI-2706G-2GPI:
- 6 x 10/100/1000BASE-T/TX RJ-45
Auto-Negotiation, Full/Half Duplex Mode
Auto MDI/MDI-X Connection
- **Standards**
IEEE 802.3 for 10BaseT
IEEE 802.3u for 100BaseT(X)/FX
IEEE 802.3z for 100BASE-X
IEEE 802.3ab 1000BaseT(X)
IEEE 802.3x for Flow Control
- **PoE**
Port 1 ~ Port 4: IEEE 802.3at/af
- **Power Connector**
6-pin screw Terminal Block (including relay)

Physical

- **Enclosure**
Metal Shell
- **Protection Class**
IP 30
- **Installation**
DIN-Rail, Wall-mount
- **Dimensions (W x H x D)**
46 x 140 x 130mm (1.81 x 5.51 x 5.11 inch)
- **Weight**
1kg

LED Indicators

- **System LED**
PWR1, PWR2, ALM
- **Port LED**
Link / Speed / Activity / PoE

Environment

- **Operating Temperature**
-40 ~ 75°C (-40 ~ 167°F)
- **Storage Temperature**
-40 ~ 85°C (-40 ~ 185°F)
- **Ambient Relative Humidity**
5 ~ 95% (non-condensing)
- **Overload Current Protection**
Present
- **Reverse Polarity Protection**
Present

Power


- **Power Consumption**
Max. 4.32W (system)
- **Power Input**
12-48V_{DC}
redundant dual power input
- **Power Budget**
120W@24/48V_{DC}
70W@12V_{DC}
- **Fault Output**
1 Relay Output, 1A@24V_{DC}

Certification

- **Safety**
LVD EN 62368-1
- **EMI**
CE, CISPR 32, FCC Part 15B Class A, e-Mark
- **EMS**
IEC 61000-4-2 ESD Level 4
IEC 61000-4-4 EFT Level 4
IEC 61000-4-5 Surge (Level 4, LAN Surge ±6 kV)
IEC 61000-4-6 CS
IEC 61000-4-8 PFMF
- **EMC**
EN 55032
EN 55035
EN 61000-6-2
EN 61000-6-4
- **Shock**
IEC 60068-2-27
- **Freefall**
IEC 60068-2-32
- **Vibration**
IEC 60068-2-6
- **Traffic control**
NEMA TS-2 compliant
- **Railway Trackside**
EN 50121-4 compliant

Dimensions

Unit: mm [inch]

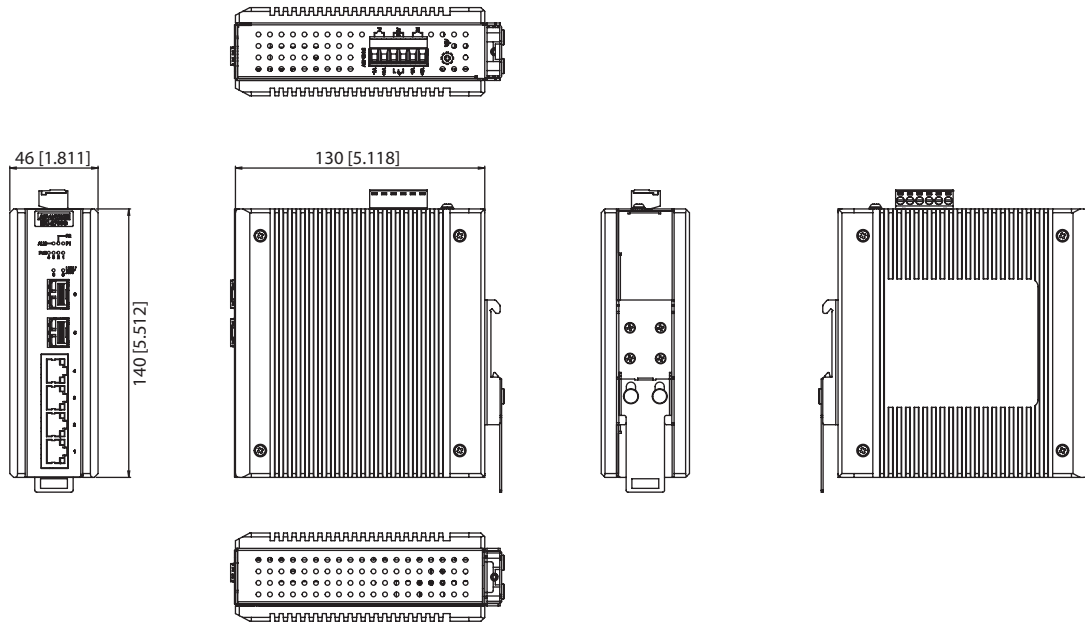

Panel Cut-out Dimensions (W x H x D): 46 x 140 x 130mm (1.811 x 5.512 x 5.118 inch)

Switch Properties

- **Switch Capacity** 12Gbps
- **Data Forwarding Rate** 8.9Mpps
- **MAC Table Size** 4K
- **Jumbo Frame** 9K

Warranty

- **Warranty Period** 5 years

Ordering Information

- **EKI-2706G-2FPI-A** 4GE + 2G SFP Port Gigabit Unmanaged Industrial PoE Ethernet Switch w/Wide Temp.
- **EKI-2706G-2GPI-A** 6GE Port Gigabit Unmanaged Industrial PoE Ethernet Switch w/Wide Temp.