

EKI-9510G-2GH

EKI-9510G-2GL

EN50155 10-port Unmanaged M12 Ethernet Switch 72/96/110 V_{DC}

EN50155 10-port Unmanaged M12 Ethernet Switch 24/48 V_{DC}



CE FCC

Features

- Complies with EN50155
- 8 x M12 X-Coded 10/100/1000Mbps ports + 2 x M12 X-Coded 10/100/1000Mbps ports with Bypass function
- Power Input
 - EKI-9510G-2GH: 72/96/110 V_{DC}
 - EKI-9510G-2GL: 24/48 V_{DC}
- Operating Voltage
 - EKI-9510G-2GH: 50.4~137.5 V_{DC}
 - EKI-9510G-2GL: 16.8~60 V_{DC}
- M12 connector with IP40 protection

Introduction

The EKI-9500 series switch is designed for railway application with rugged and high EMC performance, being suitable for networking solution for rolling stock and wayside applications. The EKI-9500 series provides M12 connectors for Ethernet/ console/ relay/ power-input connections to ensure tight & robust connectivity, and thus to guarantee reliable operation against environmental disturbances such as vibration and shock on train.

The EKI-9510G-2GH & EKI-9510G-2GL are unmanaged Ethernet switch that provide 8 x Gigabit Ethernet M12 X-code interface. Each of them also provides 2 x Gigabit Ethernet M12 X-coded ports with Bypass function to increase the reliability of the network. The EKI-9510G-2GH/ L features a "flat" design which can be easily deployed with its slender size and make network deployment easier in crowded carriage/ cabinet.

Specifications

Interface

- I/O Port: 8 x 10/100/1000Mbps M12 X-Coded + 2 x M12 X-Coded 10/100/1000Mbps ports with Bypass function
- Console port: M12 A-Coded
- Power Connector: M12 A-Coded

Physical

- Enclosure: Aluminum Shell
- Protection Class: IP 40
- Installation: Wall Mount
- Dimensions (W x D x H): 216 x 132 x 59.3 mm
- Weight: 1.5kg

LED Display

- System LEDs: PWR1, PWR2, SYS, Alarm

Environment

- Operating Temperature: -40 ~ 70°C
- Storage Temperature: -40 ~ 85°C
- Ambient Relative Humidity: 10 ~ 95% (non-condensing)

Power

- Power Consumption: 10 Watts
- Power Input
 - EKI-9510G-2GH: 72/96/110 V_{DC}
 - EKI-9510G-2GL: 24/48 V_{DC}
- Operating Voltage
 - EKI-9510G-2GH: 50.4~137.5 V_{DC}
 - EKI-9510G-2GL: 16.8~60 V_{DC}Dual inputs Supports Overload Current Protection Supports Reverse Polarity Protection

Certification


- EMI: FCC Part 15 Subpart B Class A
CE EN55032 (CISPR)
EN55024 Class A
- EMS: EN61000-4-2 (ESD); EN61000-4-3 (RS);
EN61000-4-4 (EFT); EN61000-4-5 (Surge);
EN61000-4-6 (CS)
- Shock: IEC 61373
- Freefall: IEC 60068-2-32
- Vibration: IEC 61373
- Rail Traffic: EN50155; EN50121-3-2

L2 Features

- L2 MAC Address: 8K
- Jumbo Frame: 9KB

Dimensions

Unit: mm [in.]

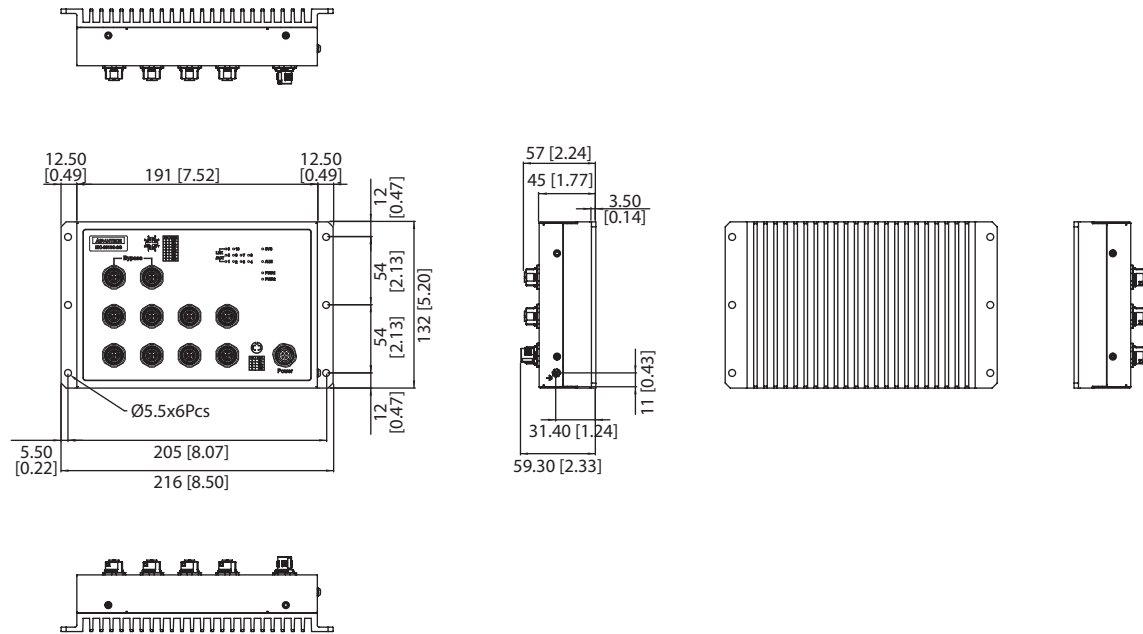

Ordering Information

- **EKI-9510G-2GH-AE** 8 x M12 X-Coded + 2 x M12 X-Coded Unmanaged Ethernet Switch, 72/96/110V_{DC} dual power input
- **EKI-9510G-2GL-AE** 8 x M12 X-Coded + 2 x M12 X-Coded Unmanaged Ethernet Switch, 24/48V_{DC} dual power input