


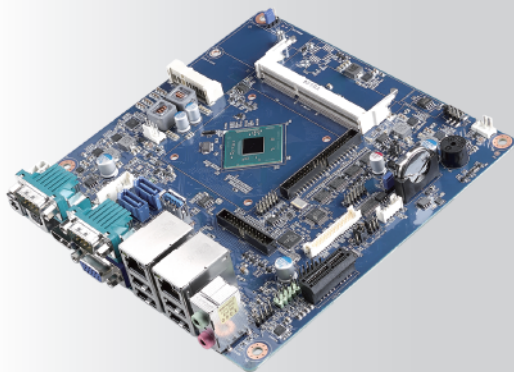

Intel® Baytrail-D J1900 Quad Core Mini-ITX

Features

- ▶ Lower total cost of ownership with DC12V support and onboard TPM1.2 (optional) & Amplifier (optional)
- ▶ Supports 1 PCIe x1, 1 Mini-PCIe (full-length), 6 COMs, 1 USB 3.0 & 5 USB 2.0, dual LAN
- ▶ Supports VGA, HDMI, LVDS
- ▶ One 204-pin SO-DIMM up to 8 GB DDR3L 1333 MHz SDRAM
- ▶ Supports Intel Baytrail-D J1900 2.0GHz Quad Core SoC

Specifications

System

CPU	Intel® Baytrail-D J1900 2.0GHz Quad Core
BIOS	AMI 64Mb SPI Flash
System Chipset	SoC
I/O Chip	Nuvoton NCT6776F
Memory Type	One 204-pin SODIMM sockets support up to 8GB DDR3L-1333 SDRAM
Watchdog Timer	Reset : 1 to 255 sec/min per step
Expansion	1 Mini-PCIe, 1 PCIe x1
Power Status	S0, S3, S4, S5
Smart Fan Control	Yes

I/O

MIO	1 LVDS, 1 USB2.0, 1 USB3.0, 4 RS-232, 1 RS-232 with 5V/12V Power, 2 SATAII, 2 Fan, 1 LPT, 1 LPC, 1 8-bit GPIO
USB	4 USB3.0(rear), 1 USB3.0 & 1 USB2.0 (internal)
GPIO	8-bit General Purpose I/O

Display

HDMI	Onboard, HDMI 1.3
VGA	Onboard, up to SXGA 2560 x 1600 (@60Hz)
LVDS	Onboard, up to SXGA 2560 x 1600 (@60Hz)

Audio

Audio Codec	Realtek ALC892, 5.1 Channel HD Audio
Audio Interface	Line-out, Mic-in, Front Audio Header
Audio Amplifier (W)	2W, TI TPA2012 (Optional)

Ethernet

LAN 1	Realtek RTL8111G Gigabit LAN
LAN 2	Realtek RTL8111G Gigabit LAN

Back Panel I/O Port

1 VGA Port
1 HDMI Port
4 USB 2.0 Port
1 Audio I/O (2 Jacks)
1 DC-in Jack
2 LAN RJ45 Port
2 COM RS-232 (Wake-On-Ring)
1 PS/2 Keyboard/ Mouse Port

Internal I/O Connector

4 COM RS-232 Connector (1 with 5V/12V)
2 SATAII Connector
1 SATA Power Connector
1 Front Panel Connector
1 Front Audio Connector
1 CPU Fan Connector
1 System Fan Connector
1 USB 2.0 Header
1 USB 3.0 Connector
1 Mini PCI-E Connector
1 LVDS Connector
1 LVDS Backlight Connector
1 AMP Connector
1 GPIO Connector

Power

Power Requirement	+12V (5A)
Power Type	12V DC-in
Power Connector	1 DC-in Jack 1 4-pin ATX 12V Power Connector

Mechanical & Environmental

Operating Temperature	0°C to 60°C (32°F to 140°F)
Operating Humidity	95%@40°C (non-condensing), operating
Size (L x W)	6.69" x 6.69" (170 mm x 170 mm)
Weight	0.79 lbs (0.36 Kg)

Ordering Information

Part Number	Description
IBAYT-IB200-00A1E	IBAYT-IB2 MiniITX standard A101-2