IMC-318I

Centralized Powered Media Converter Chassis



Features

- 18-slot chassis
- Modular design, hot-swappable
- Supports an extended operating temperature range
- Features internal AC power




Introduction

The IMC-318I is a centralized powered chassis designed with a modular enclosure that takes up to 18 miniature media converters (the IMC-350/370 series). It provides high port density mounting and emphasizes power efficiency. By easily and effectively connecting multiple converters in one chassis, the IMC-318I eliminates the mass needs of AC power adapters, saving network device construction space.

Specifications

| Technical | | | | |
|---|---------------|--|--|--|
| 18 slot chassis that can house miniature media convert IMC-350/370 series | | | | |
| Single AC power supply included | | | | |
| Fits into a 19" rack; table top mounting | | | | |
| Power AC | | | | |
| 100-240 VAC, 1.5A | | | | |
| MTBF | | | | |
| MTBF | 150,422 hours | | | |

| Environment | | | |
|------------------------------|--|--|--|
| Operating Temperature | -25 to +70 °C (-13 to +158 °F) | | |
| Storage Temperature | -25 to +70 °C (-13 to +158 °F) | | |
| Operating Humidity | 5 ~ 95% (non-condensing) | | |
| | 0 ~ 10,000 ft. altitude | | |
| Mechanical | | | |
| Dimensions (H x W x D) | 5.8 x 43.10 x 23.5 cm (2.30 x 16.97 x 9.25 in) | | |
| Weight | 4.5 kg (10.0 lb) | | |
| Certifications | | | |
| CE, FCC Class A, UL/cUL, CSA | | | |

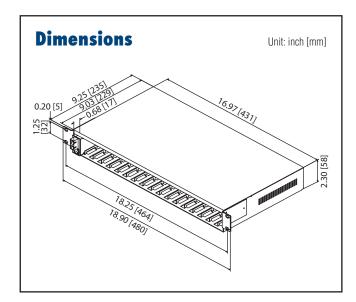

Ordering Information

| Part Number | Also Known As | Slot | Power Cord |
|-------------|---------------|------|------------|
| IMC-318I | - | 18 | - |
| IMC-318I-US | 850-13086 | 18 | US |