

IPC-610LMB-40BEA1

4U Rackmount Chassis with Battery Backup Unit



Features

- Built in 36,000mAh Ni-MH battery to prevent blackout and AC power instability
- Battery supports 6-minute backup time (at 200W)
- Supports an ATX motherboard up to 7 slots
- Shock-resistant disk drive bay design holds up to three 5.25" and one 3.5" disk drives
- Special hold-down clamp design with rubber cushions protects the cards from shocks and vibrations
- Power and HDD activity notification improves system availability
- Front-accessible air filter for easy system maintenance
- Lockable front door prevents unauthorized access


CE FCC

Specifications

Drive Bay	3.5"	External	
	5.25"	1*	
Cooling	Fan	1 (12 cm / 82 CFM)	
	Air Filter	Yes	
Miscellaneous	LED Indicators	Power and HDD activity	
	Control	Power switch and system reset button	
	Rear Panel	Five 9-pin D-Sub & one 25-pin D-sub openings	
Environment	Temperature	Operating: 0 ~ 40 °C (32 ~ 104 °F)	Non-Operating: -20 ~ 60 °C (-4 ~ 140 °F)
	Humidity	10 ~ 85 % @ 40 °C, non-condensing	10 ~ 95 % @ 40 °C, non-condensing
	Vibration (5 ~ 500 Hz)	1 Grms	2 G
	Color / Logo	Beige / Advantech Logo	
Physical Characteristics	Dimensions (W x H x D)	482 x 177 x 479 mm (19" x 7" x 18.9")	
	Weight	14.5 kg (31.9 lb) / 14.2 kg (31.2 lb)	


*allow one 2.5" HDD/SSD installed without convert bracket.

Front View

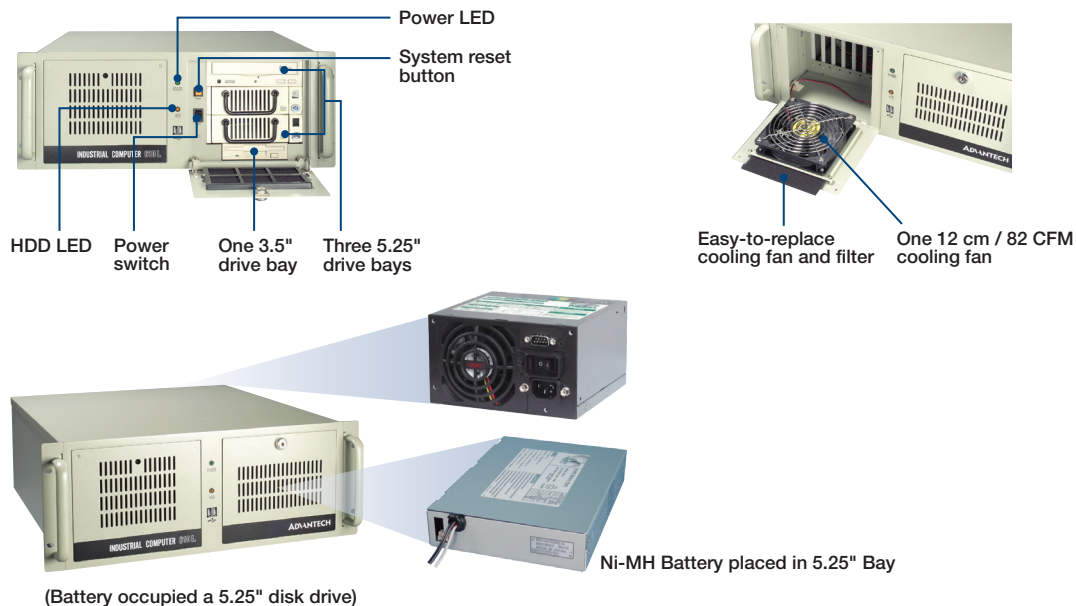

Dimensions

Unit: mm [inch]

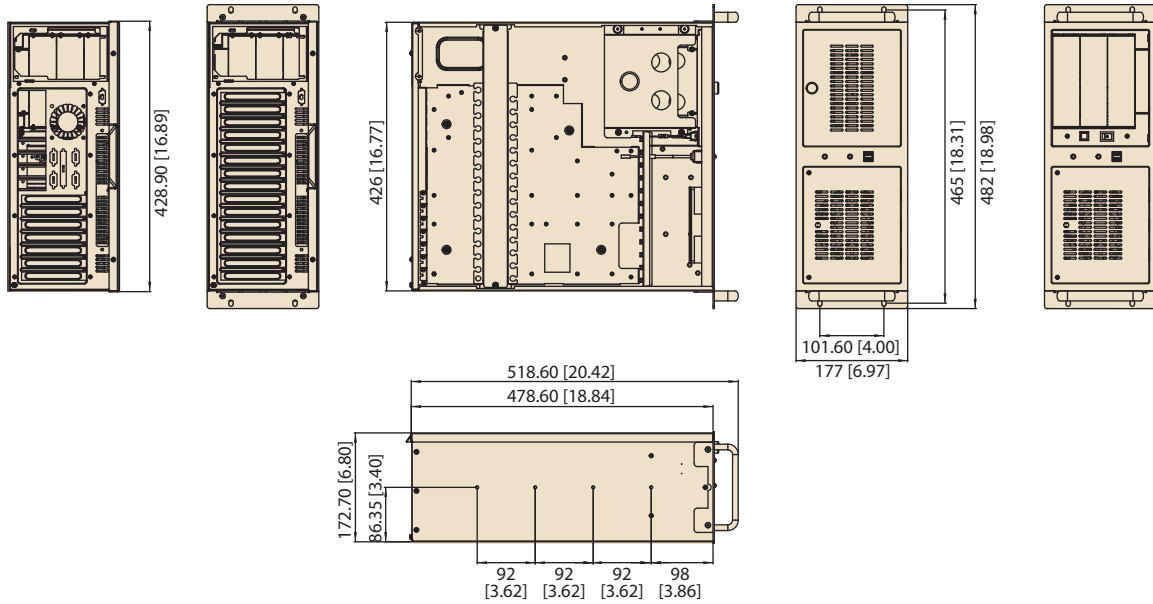

Ordering Information

Part Number	Color	Power Supply	Wattage	Switch Type
Motherboard Version				
IPC-610LMB-40BEA1	Beige	96PS-A400WPS2B-U	400W	ATX

Spare Parts

Part Number	Description
2130006149S000	Fan filter 127 x 127 x 5 mm
2130004802S000	Door filter 142 x 97 x 5 mm

Optional Accessories

Part Number	Description
IPC-DT-5230E	Mobile rack for converting dual 5.25" drive bays to three 3.5" SATA HDD trays