

MIC-741-AT

AI Inference System Powered by NVIDIA® Jetson Thor™



Features

- Supports NVIDIA® Jetson T5000™ / Jetson T4000™ up to 2070 TFLOPS (FP4)
- Supports 1 x SFP28 (1 x 25GbE)
- Supports 2 x 1GbE, 2 x 10GbE, 6 x USB 3.2 Gen 2, 2 x M.2 2280, 1 x M.2 Ekey (Support both WiFi AEKey), 1 x M.2 Bkey (LTE,5G)
- Supports 4 x Isolation CAN FD 8M
- Support up to 8-ch GMSL2.0 with mini FAKRA connectors
- Support multiple purpose of large AI model for Generative AI application




Process		NVIDIA® Jetson T5000™ / Jetson T4000™
	CPU	Jetson T5000: 14-core Arm® Neoverse V3AE (64-bit) SMP CPU architecture L1 Cache (I, D) per core: 64KB + 64KB, L2 1MB, L3 16MB Jetson T4000: 12-core Arm® Neoverse V3AE (64-bit) SMP CPU architecture L1 Cache (I, D) per core: 64KB + 64KB, L2 1MB, L3 16MB
	GPU	Jetson T5000: 2560-core NVIDIA Blackwell architecture GPU with 96 fifth-gen Tensor Cores Jetson T4000: 1536-core NVIDIA Blackwell architecture GPU with 64 fifth-gen Tensor Cores
Ethernet	Memory	Jetson T5000: 128GB LPDDR5X Jetson T4000: 64GB LPDDR5X
	RJ45	2 x 10/100/1000 Mbps Ethernet
	RJ45	2 x 10/100/1000/2500/5000/10000 Mbps Ethernet
I/O	SFP28	1 x 25GbE
	Display	HDMI (Max. resolution 3840x2160 @ 60Hz)
	USB	6 x USB 3.2 Gen 2 Type-A
	OTG USB	1 x USB 2.0 Type-C
	Console	1 x USB 2.0 Type-C console for debug (UART to USB)
Expansion	SIM card	1 x Nano SIM on side of board (for B Key)
	M.2 Ekey	1 x 2230 E-key (Signal: PCIe x1 + USB2.0)
	M.2 Bkey	1 x 3052/3042 B-key (Signal: USB3.0 + USB2.0)
	TPM	1 x TPM (onboard)
	CAN	4 x CAN FD Isolation 8M
	I2C (Optional)	1 x I2C (Expansion for 4 x DI/DO module)
	OOB (Optional)	1 x OOB (Pin Header)
	PPS (Optional)	1 x PPS (Pin Header)
	GMSL (Optional)	4 x MIPI 4 lanes (Support 8-ch GMSL2.0 with mini FAKRA connectors)
	Audio (Optional)	1 x audio speaker out, MIC in on board
Storage	M.2 M.key	1 x 2280 M-key NVMe (PCIe x 4) pre-installed 1TB SSD 1 x 2280 M-key NVMe (PCIe x 2)
Power	Power Supply	Power input: 19-36V
	Power Type	Terminal Block 2 Pin
	Internal pin header	2 x SMART FAN
Environment	Operational Temperature	-10 ~ 60 °C with 0.7 m/s air flow
	Operating Humidity	95% @ 40 °C (non-condensing)
	Vibration	3 Grms @ 5 ~ 500 Hz, random, 1 hr/axis
Mechanical	Dimensions (W x D x H)	MIC-741-AT7A1 (T5000, Fan Kit): 311 x 161 x 95 mm MIC-741-AT6A1 (T4000, Fanless): 270 x 160 x 90 mm
	Weight	MIC-741-AT7A1 (T5000, Fan Kit): 4.42 kgs MIC-741-AT6A1 (T4000, Fanless): 3.84 kgs
	Installation	Desktop/ Wall mount
Operating System		NVIDIA Jetpack™ 7.1
Certifications		CE/FCC/CCC/BSMI/UL (No RED certification)


Dimensions

Unit: mm

MIC-741-AT7A1

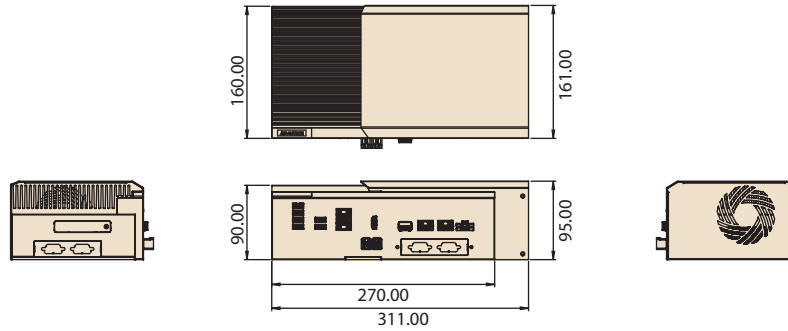

MIC-741-AT6A1

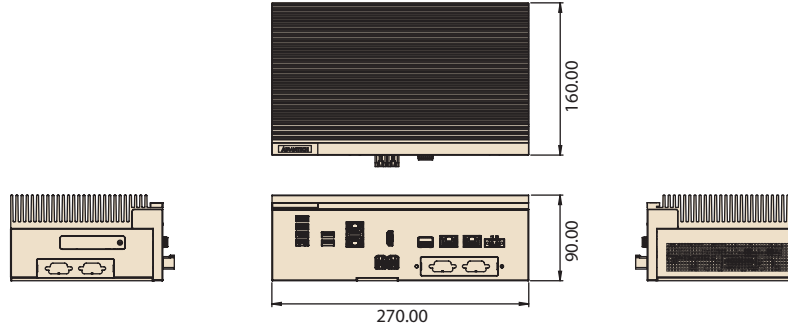

Ordering Information

Part Number	NVIDIA Module	Memory	eMMC	Installed Jetpack version	NVMe
MIC-741-AT7A1	NVIDIA® Jetson T5000™	128 GB	NA	JetPack 7.1	1TB Pre-installed
MIC-741-AT6A1	NVIDIA® Jetson T4000™	64 GB	NA	JetPack 7.1	1TB Pre-installed
MIC-741-AT7A2 (w/o SSD)	NVIDIA® Jetson T5000™	128GB	NA	NA	NA
MIC-741-AT6A2 (w/o SSD)	NVIDIA® Jetson T4000™	64GB	NA	NA	NA

Packing List

Part Number	Description	Quantity	Part Number	Description	Quantity
MIC-741-AT	AI Inference System	1	1652002202	Plug-in Block 2P for power	1
1700033249-01	USB to Type-C cable for system recovery	1	1930005673-11	Screws for M.2 NVMe/ 5G/ WIFI Module	3

Optional

	Part Number	Description	Quantity
SSD	96FD80-P2TB-TS1	SSSTC M.2 2280 2TB NVMe G4x4 DRAMLESS SSD -25°C ~85°C	1
	SQF-C8MV4-2TDEFM	SQF PCIe/NVMe Gen.4 M.2 2280 OPAL 730-D 2T 3D TLC BiCS5 (-20~85°C)	1
	SQF-C8MV4-4TDEFM	SQF PCIe/NVMe Gen.4 M.2 2280 OPAL 730-D 4T 3D TLC BiCS5 (-20~85°C)	1
GMSL2 frame grabber	MIC-FG-8G2C1	8CH GMSL2 frame grabber with mini FAKRA	1
	1751000758-01	RF Cable MINI FAKRA B-Z/F FAKRA-Z/M 1x4 BLK L300	1 to 4 cameras
	1751000805-01	Cable Ant. FAKRA-Z/F FAKRA-Z/F KS302 BLK L15M	1 (by camera quantity)
	1700026907-01	Cable 1x4P-2.0/1x4P-2.0 10CM (Internal power cable for GMSL)	1
Wifi	EWM-W179M201E	Wi-Fi 6 + BT Module M.2 Key A/E	1
	1751000620-01	Cable Ant. SMA/F-R MHF4L/113 BLK L300mm (Wi-Fi)	2
	1751000460-01	Dipole Ant. Wi-Fi 6E SMA/M-R BLK L111.7mm IP54 (Wi-Fi)	2
5G	AIW-356-DQ	5G Sub6+GNSS M.2 3052 Key B (by region)	1
	1751000623-01	Cable Ant. SMA/F MHF4L/113 BLK L300mm (5G)	4
	1750009372-01	Ant.SMA/M 90/180 5G BLK 167mm RG178 (5G)	4
Power adapter	XMIC-FSP230-AAAN3	ADP A/D 100-240V 230W 24V C14 TERMINAL BLOCK 2P	1
Power Cord	1702002600	Power Cord (USA) UL/CSA, 3-pin, 10A, 125V, 1.83 M	1
	1700029019-01	Power Cord (PSE/BSMI), 3-pin, 7A, 125V, 1.8 M, DAC-ST01	1
	1702002605	Power Cord (EU) 2-pin, 10/16A, 220V, 1.83 M, 90 D	1