

SKY-6400

4U Rackmount Intel® Xeon® Scalable Series GPU Server, Supporting 4 x PCIe x16 Double-Deck Cards Plus 1 x PCIe x8 and 1 x PCIe x4 Single-Deck Cards



Features

- Processor: Dual Intel® Xeon® scalable series
- Memory: DDR4 REG 2666/2400/2133/1866 MHz DIMM, up to 384GB
- Remote Management: IPMI function support
- Expansion: Supporting 4 * PCIe x16 double-deck card + 1* PCIe x8 single-deck FH/HL card + 1*PCIe x4 card
- PSU: 2000W 1+1 redundant power supply with 80 PLUS Platinum level certification
- Easy maintenance system fan: 3 x 12CM system fan with easy maintenance feature




Specifications

Processor System	Chipset	Intel C621 Chipset	
	CPU	Dual Intel LGA 3647-P0 for Intel® Xeon® Scalable Series processor (up to 205W TDP)	
Memory	Total slots	12 (1 DIMM per channel)	
	Capacity	Maximum 768GB ECC LRDIMM Maximum 384GB ECC RDIMM	
	Memory type	DDR4 ECC-REG 2133/2400 /2666 MHz DIMM, support Apache Pass	
	Memory size	4 GB, 8 GB, 16 GB, 32 GB, 64 GB (LRDIMM)	
Graphics	Controller	Aspeed AST2500	
	VRAM	64 MB	
Expansion Slot	Slot 1	PCIe x4 (Gen3 x 4 link)	
	Slot 2	PCIe x16 slot (Gen3 x16 link), for double-deck 4.376"(H)/10.5"(L) expansion cards	
	Slot 3	PCIe x4 (Gen3 x 4 link)	
	Slot 4	PCIe x16 slot (Gen3 x16 link), for double-deck 4.376"(H)/10.5"(L) expansion cards	
	Slot 5	PCIe x4 (Gen3 x 4 link)	
	Slot 6	PCIe x16 slot (Gen3 x16 link), for double-deck 4.376"(H)/10.5"(L) expansion cards	
	Slot 7	PCIe x4 (Gen3 x 4 link)	
	Slot 8	PCIe x16 (Gen3 x 16 link), for double -deck 4.276"(H)/10.5"(L) expansion cards	
	Slot 9	PCIe x8 (Gen3 x 8 link)	
Drive Bay	2.5" (Internal)	2	
	3.5" (Front Accessible)	-	
	3.5" (Hot Swap)	8 (support 2.5"/3.5" drive)	
Ethernet	Interface	10/100/1000 Mbps Gigabit	
	Controller	2 x Intel I210AT	
Front I/O Interface	USB	2 x USB 3.0	
	USB	4 x USB 3.0	
Rear I/O Interface	PS/2	-	
	COM	1	
	Display	1 x VGA	
	RJ-45	2 (1 is sharing NIC for IPMI)	
Internal connector	USB	5 (2 USB3.0, 2 USB2.0, 1 USB 2.0 Type-A)	
	COM	1	
	LPC	1	
Watchdog Timer	Output	System reset	
	Interval	Programmable, 1~255 sec	
Power Supply	Power Output Wattage	80 PLUS Platinum 2000W redundant Power Supply (Depends on input voltage)	
	Input Range	200-240V _{AC} (Output: 1800W-1968W)	
Cooling	Chassis Fan	3 x 120 x 38 + 2 x 80 x 38	
	Air Filter	-	
Miscellaneous	LED Indicators	Power status, HDD activity, LAN1 & LAN2	
	Remote Management	Advantech Remote Monitoring Utility	
Environment	Temperature	Operating	Non-Operating
		0 ~ 35° C (32 ~ 85° F) *0 ~ 30° C (32 ~ 85.9° F) for NVidia Tesla P100/V100	-20 ~ 60° C (-4 ~ 140° F)
	Humidity	95% @ 40° C	95% @ 60° C
	Vibration (5 ~ 500 Hz)	0.25 Grms	2 G
	Shock	10G (with 11ms duration, half sine wave)	
Physical Characteristics	Dimension (W x H x D)	435 x 177 x 673 mm (17.12" x 6.96" x 26.49")	

Dimensions

Unit: mm [inch]

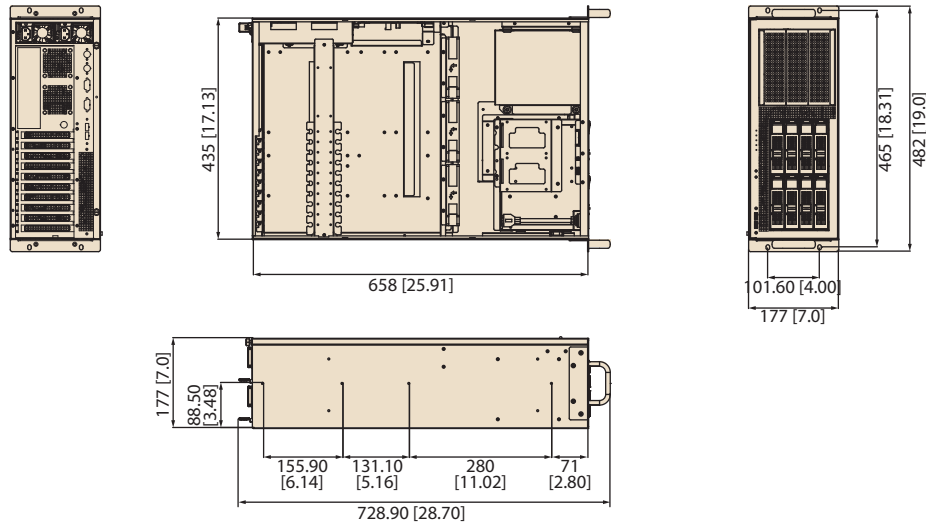

Front View



Rear View



Ordering Information

Part Number	HDD	M.2 2242 (SATA)	VGA Chip	RJ45	IPMI	Power supply
SKY-6400-R20A1	10	2	AST 2500	2	YES	1+1 2000W RPS

System Contents

Items	Advantech P/N	Quantity
CPU Cooler	1960081603N001	2
GPU Card Power Cable (Convert PCIe Power to CPU Power)	1700027652-01	4
Driver CD	2061097500	1
External Fan Kit (8CM Fan x2)	96616400200	1
GPU Extend Bracket	1960084351N000	4

Optional Accessories

Part	Number	Description
PCA-AUDIO-HDA1E		HD Audio-card
PCA-TPM-00A1E		TPM Module
1700002204		Dual port USB cable (27 cm) with bracket
1700020277-01		Dual port USB 3.0 cable (30 cm) with bracket
1701090401		COM port cable with bracket
9680016858		Slide Rail
1960071739N100		Hold-down bar for GPU card power at north edge
1992610020		Rubber for GPU card power at north edge to pair with hold-down bar, and one GPU card needs one pcs rubber