


# SOM-5885


## Intel® 14th Gen Core Processors (Code Name: Meteor Lake U/H) COM Express® Basic Type 6 Module

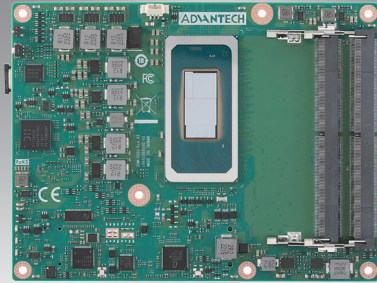

### Features

- COM Express® R3.1 Basic Module Type 6 Pinout
- Intel® 14th Gen Core Processors , Up to 14C/20T
- Intel Xe LPG graphic up to 128EU, 4 independent 4K display
- Dual-CH DDR5 5600MT/s up to 96GB SODIMM
- Multiple I/O expansion: 2.5GbE, PCIe gen4, USB4 & USB3.2 Gen2, SATA3.0
- Support Dual BIOS failsafe
- Supports iManager, Embedded Software APIs and Wise-DeviceOn


#### Software APIs:



### Specifications

Form Factor	Form Factor	COM Express Basic				
	Pin-out Type	COM Express R3.1 Type 6 compatible				
Processor System	CPU	Core Ultra 7 165H	Core Ultra 7 155H	Core Ultra 7 155U	Core Ultra 5 125H	Core Ultra 5 125U
	Base Frequency	1.4GHz/0.9GHz	1.4GHz/0.9GHz	1.7GHz/1.2GHz	1.2GHz/0.7GHz	1.3GHz/0.8GHz
	Max Turbo Frequency	5GHz/3.8GHz	4.8GHz/3.8GHz	4.8GHz/3.8GHz	4.5GHz/3.6GHz	4.3GHz/3.6GHz
	Cores	14C (6P+8E)	14C (6P+8E)	10C (2P+8E)	12C (4P+8E)	10C (2P+8E)
	LLC	24M	24M	12M	18M	12M
	Default TDP	45W	45W	28W	45W	28W
	cTDP	20W-45W	20W-45W	12-28W	20W-45W	12-28W
	vPRO	Yes	NA	NA	NA	NA
BIOS	AMI UEFI 256Mbit					
Memory	Technology	DDR5				
	Speed	5600 MT/s				
	Max. Capacity	Up to 96GB				
	Channel/Socket	Dual Channel / 2 Sockets SODIMM, 1DPC				
ECC Support	IB ECC					
Graphics	Controller	Intel® Xe LPG				
	Graphics EU	128EU	128EU	64EU	112EU	64EU
	Max. Frequency	2.3GHz	2.25GHz	1.95GHz	2.2GHz	1.85GHz
	3D/HW Acceleration	HW Encode: Supports AVC/H264, JPEG, HEVC/H265, VP9 and AV1. HW Decode: Supports MPEG2, AVC/H264, JPEG/MJPEG, HEVC/H265, VP9 and AV1				
Display	LCD (LVDS/eDP)	1port LVDS Dual channel: 1920 x 1200 @60Hz/eDP 4096 x 2304 @60Hz				
	DDI (HDMI/DisplayPort)	3 DDI Port Support Configurable HDMI/DisplayPort -HDMI 2.1: 4096 x 2304 @ 60Hz -DisplayPort 2.1 HBR3: 4096 x 2304 @ 60Hz				
	Multiple Display	Quad Simultaneous Independent Display				
Expansion	PEG	PEG (H series): PCIe Gen4, 16 lanes, Bifurcate to 1 x8, 2 x4 PEG (U series): PCIe Gen4, 8 lanes, Bifurcate to 2 x4				
	PCI Express	PCIe: PCIe gen4, Up to 8 lanes & Up to 8 end devices -4 PCIe Gen4 lanes, Bifurcate to x1, x2, x4 -Default 4 PCIe Gen4 & Gen3 lanes which support x1 only (Option with 2 SATA & PCIe Switch, Support PCIe x4 bifurcate to x1, x2, x4)				
Serial Bus	SMBus	Yes				
	I2C Bus	Yes				
Ethernet	Gigabit	Intel I226 controller; Speed: 10M / 100M / 1000M / 2.5G speeds				
I/O	SATA3.0	Up to 2 Ports (6Gbps), Configurable by 4 lanes [0,2]/[1,3]				
	USB4	Up to 2 ports, Co-lay with DDI, Support by SOM-MZ20				
	USB3.2 (Gen2)	4 Ports (10 Gbps)				
	USB2.0	8 Ports (480 Mbps)				
	SPI Bus	Yes. For BIOS EEPROM, Support Dual BIOS failsafe				
	GPIO	8-bit, Default from iManager, Option from CPU				
	LPC	Yes				
	Audio Interface	HD Audio				
	Watchdog	65536 level, 0 ~ 65535 sec				
	COM Port	2 Ports (2-Wire)				
TPM	TPM2.0					
CAN Bus	Support one CAN Bus option from COM Port					
Power	Type	ATX: Vin, VSB; AT: Vin				
	Supply Voltage	Vin: 8.5V ~ 20V; VSB: 4.75V ~ 5.25V; RTC Battery: 2.0V ~ 3.3V				
	Power Consumption (Max.)	TBD				
	Power Consumption (Idle)	TBD				
Environment	Operating Temperature	Standard: 0 ~ 60 °C (32 ~ 140 °F)				
	Storage Temperature	-40 ~ 85 °C (-40 ~ 185 °F)				
	Humidity	Operating: 40°C@95% relative humidity, non-condensing Storage: 60°C@95% relative humidity, non-condensing				
	Vibration Resistance	3.5 Grms				
Mechanical	Dimensions	125 mm x 95 mm (4.92" x 3.74")				

## Block Diagram

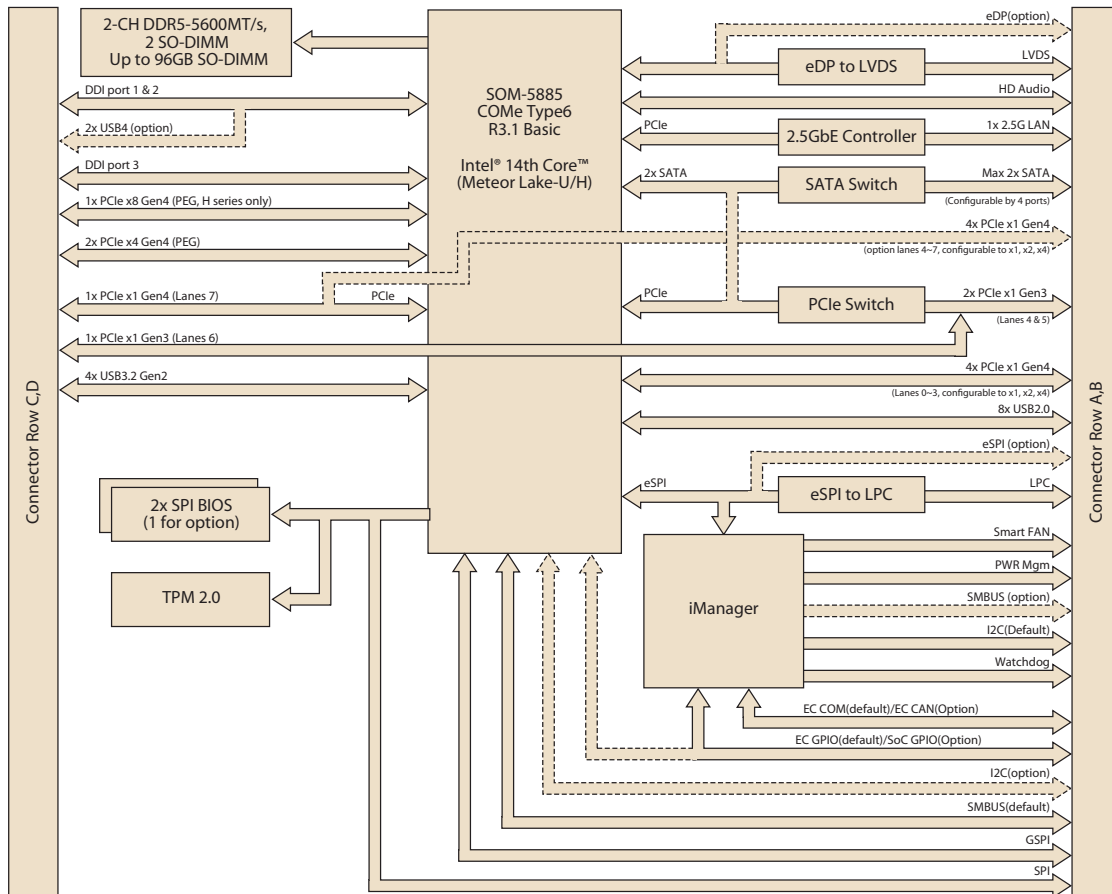

### PCIe configuration

	PEG	PCIe	SATA
Configuration 1 (With PCIe switch)	1x PCIe x8 Gen4 (H series only) 2x PCIe x4 Gen4	4x PCIe x1 Gen4 (x1, x2, x4) 1x PCIe x1 Gen4 3x PCIe x1 Gen3	2x SATA3
Configuration 2 (Without PCIe switch)	1x PCIe x8 Gen4 (H series only) 2x PCIe x4 Gen4	4x PCIe x1 Gen4 (x1, x2, x4) 2x PCIe x1 Gen4	2x SATA3
Configuration 3 (Without PCIe switch)	1x PCIe x8 Gen4 (H series only) 2x PCIe x4 Gen4	8x PCIe x1 Gen4 (x1, x2, x4)	N/A

## Ordering Information

Part No.	CPU	Core	Base Freq.	Max. Boost Freq.	Default TDP	cTDP	LLC	DDR5 SODIMM	PCIe Switch	IBECC	Thermal solution	Operating Temp.
SOM-5885C7HV-S4A1	Core Ultra 7-165H	14	1.4GHz/0.9GHz	5GHz	45W	20W-45W	24M	Non-ECC	Yes	Yes	Active	0 – 60 °C
SOM-5885C7H-S4A1	Core Ultra 7-155H	14	1.4GHz/0.9GHz	4.8GHz	45W	20W-45W	24M	Non-ECC	N/A	Yes	Active	0 – 60 °C
SOM-5885C5H-S2A1	Core Ultra 5-125H	12	1.2GHz/0.7GHz	4.5GHz	45W	20W-45W	18M	Non-ECC	N/A	Yes	Active	0 – 60 °C
SOM-5885C7U-S7A1	Core Ultra 7-155U	10	1.7GHz/1.2GHz	4.8GHz	28W	12-28W	12M	Non-ECC	N/A	Yes	Active	0 – 60 °C
SOM-5885C5U-S3A1	Core Ultra 5-125U	10	1.3GHz/0.8GHz	4.3GHz	28W	12-28W	12M	Non-ECC	N/A	Yes	Active	0 – 60 °C

Any other SKUs or combination is project based support. Please contact sales for details.

## Development Board

Part No.	Description
SOM-DB5830-00A3	COMe Devel. Board COMe R3.1 Type6 pin-out (LVDS) 0 – 60 °C
SOM-DB5830A-00A3	COMe Devel. Board COMe R3.1 Type6 pin-out (eDP) 0 – 60 °C

## Optional Accessories

Part No.	Description
1970005036T001	Semi-Cooler 125 x 95 x 33.2 mm with 12V Fan
1970005940T001	QFCS 125x95x26.2mm

## Packing List

Part No.	Description	Quantity
-	SOM-5885 COM module	1
1970005918T001	Heatspreader	1

## Embedded OS

OS	Part No.	Description
Win10	20706WX1HS0106	img W10 21HL SOM-5885 64b 21H2 ENU
Win10	20706WX1VS0106	img W10 21VL SOM-5885 64b 21H2 ENU
Win10	20706WX1ES0106	img W10 21EL SOM-5885 64b 21H2 ENU

## Memory AVL List

Vendor	PN	Speed	Capacity
ADATA	AD5S560048G-B	5600 MT/s	48GB
ADATA	AQD-SD5V32GN56-SB	5600 MT/s	32GB
Advantech	SQR-SD5N32G5K6HNAB	5600 MT/s	32GB
Advantech	SQR-SD5N32G5K6MNDB	5600 MT/s	32GB
Advantech	SQR-SD5N32G5K6SNPB	5600 MT/s	32GB
Apacer	D22.35305S.001	5600 MT/s	32GB
Hynix	HMCG88AGBSA095N2	5600 MT/s	32GB
Micron	MTC8C108YS1SC56BB1	5600 MT/s	24GB
Micron	MTC16C2085S1SC56BD1	5600 MT/s	32GB
Samsung	M425R4GA3PB0-CWMOD	5600 MT/s	32GB