


SOM-5886


Intel® Core™ Ultra Series 3 Processors (Panther Lake) COM Express® Basic Type 6 Module

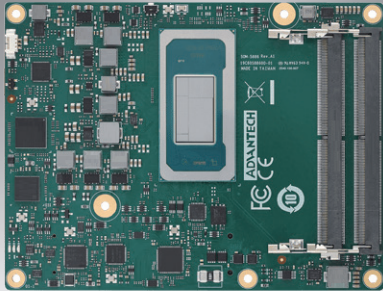

Features

- COM Express® R3.1 Basic Module Type 6 Pinout
- Intel® Core™ Ultra Series 3 Processors (Panther Lake), Up to 16C/20T
- Intel® ARC™ GPU up to 12Xe, 4 independent 4K display
- Integrated NPU5 50TOPS for dedicated AI acceleration,
- Dual-Channel DDR5-7200 up to 128GB CSODIMM
- Multiple I/O expansion: 2.5GbE, PCIe Gen4, USB4 & USB3.2 Gen2, SATA3.0
- Supporting Embedded Software APIs and WISE-PaaS/DeviceOn

Software APIs:




Windows SUSI API DeviceOn CE FC

Specifications

		Intel Core Ultra X9	Intel Core Ultra X9	Intel Core Ultra X7	Intel Core Ultra 7	Intel Core Ultra 5	Intel Core Ultra X7	Intel Core Ultra 5	
CPU	CPU	388H	386H	358H	356H	325	368HR	336HRE	
	Cores	16C	16C	16C	12C	8C	16C	8C	
	Base Frequency	2.1GHz	2.1GHz	1.9GHz	1.9GHz	2.1GHz	TBD	TBD	
	Max Turbo Frequency (P-core)	5.0GHz	4.8GHz	4.7GHz	4.6GHz	4.4GHz	TBD	TBD	
	LLC	18MB	18MB	18MB	18MB	12MB	18MB	18MB	
	Processor Base Power	25W	25W	25W	25W	25W	25W	25W	
	Maximum Turbo Power	64W, 80W	64W, 80W	64W, 80W	64W, 80W	55W	64W, 80W	64W, 80W	
	cTDP	15W-65W	15W-65W	15W-65W	15W-65W	12W-45W	15W-65W	15W-65W	
	vPRO	Yes	Yes	No	No	No	Yes	Yes	
	BIOS	AMI UEFI 256Mbit							
Integrated GPU	Controller	Intel® Xe3 LPG							
	Total Xe Cores	12Xe (192EU)	4Xe (64EUs)	12Xe (192EUs)	4Xe (64EUs)	4Xe (64EUs)	12Xe (192EUs)	4Xe (64EUs)	
	Max. Frequency/PTOPS	2.5GHz/122TOPS	2.5GHz/40TOPS	2.5GHz/122TOPS	2.45GHz/40TOPS	2.45GHz/40TOPS	TBD	TBD	
Integrated NPU	3D/HW Acceleration	HW Encode: Supports AVC/H264, JPEG, HEVC/H265 and AV1. HW Decode: Supports MPEG2, AVC/H264, JPEG/MJPEG, HEVC/H265, VP9, AV1 and VVC/H266							
	PTOPS	50TOPS	50TOPS	50TOPS	50TOPS	50TOPS	47TOPS	47TOPS	
Memory	Technology	DDR5							
	Speed	7200 MT/s							
	Max. Capacity	Up to 128GB (2x 64GB)							
	Channel/Socket	Dual Channel / 2 Sockets CSODIMM, 1DPC							
Display	ECC Support	IB ECC							
	LCD (LVDS/eDP)	1port LVDS Dual channel: 1920 x 1200 @60Hz/eDP 4096 x 2304 @60Hz							
	DDI (HDMI/DisplayPort)	- HDMI 2.1: 4096 x 2304 @ 60Hz - DisplayPort 2.1 up to HBR3: 4096 x 2304 @ 60Hz							
Expansion	Multiple Display	Quad Simultaneous Independent Display							
	PEG (PCI Express Graphics)	PEG (H484 series): PCIe Gen4, 8 lanes, Bitfurcate to 1 x8, 2 x4 PEG (H12Xe & H404 series): PCIe Gen4, 4 lanes, Bitfurcate to 2 x4							
Serial Bus	PCI Express	PCIe Gen4, Up to 8 lanes & Up to 8 end devices - 8 PCIe Gen4 lanes, Bitfurcate to x1, x2, x4							
	SMBus	Yes							
Ethernet	I2C Bus	Yes							
	Gigabit	Intel I226 controller; Speed: 10M / 100M / 1000M / 2.5G speeds							
I/O	SATA3.0	Up to 2 Ports (6Gbps)							
	USB4	Up to 2 ports, Co-lay with DDI, Support by SOM-MZ20							
	USB3.2 (Gen2)	4 Ports (10 Gbps)							
	USB2.0	8 Ports (480 Mbps)							
	SPI Bus	Yes							
	GPIO	8-bit, Default from EC, Option from CPU							
	LPC	Yes							
	Audio Interface	HD Audio							
	Watchdog	65536 level, 0 ~ 65535 sec							
	COM Port	2 Ports (2-Wire)							
Power	TPM	TPM2.0							
	CAN Bus	Support one CAN Bus option from COM Port							
Environment	Type	ATX: Vin, VSB; AT: Vin							
	Supply Voltage	Vin: 8.5V ~ 20V; VSB: 4.75V ~ 5.25V; RTC Battery: 2.0V ~ 3.3V							
	Power Consumption (Max.)	TBC							
	Power Consumption (Idle)	TBC							
Mechanical	Operating Temperature	Standard: 0 ~ 60 °C (32 ~ 140 °F) Extend: -40 ~ 85 °C (-40 ~ 185 °F)							
	Storage Temperature	-40 ~ 85 °C (-40 ~ 185 °F)							
	Humidity	Operating: 40 °C@95% relative humidity, non-condensing Storage: 60 °C@95% relative humidity, non-condensing							
Mechanical	Vibration Resistance	3.5 Grms							
	Dimensions	125 mm x 95 mm (4.92" x 3.74")							

Block Diagram

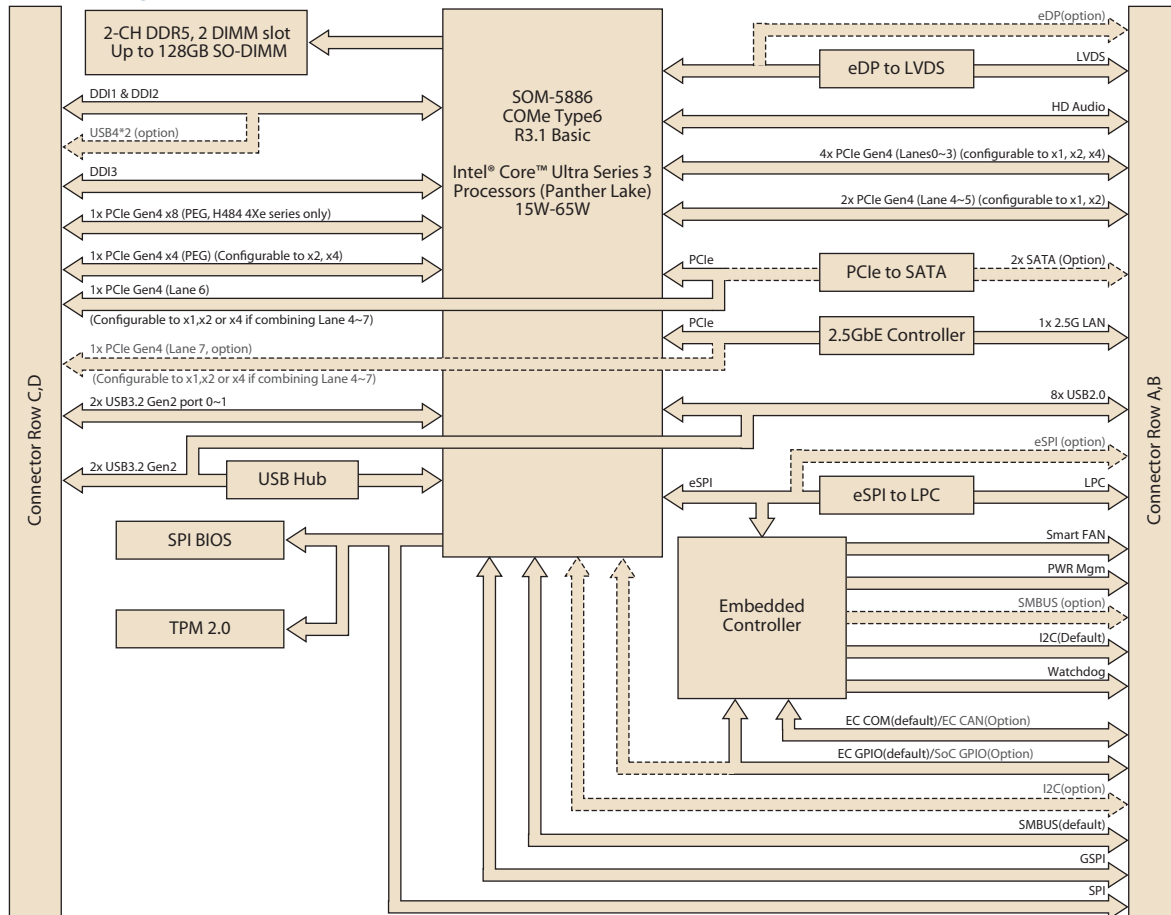

Ordering Information

Part No.	CPU	Cores	Base Freq.	Max Turbo Freq.	LLC Cache	NPU PTOPS	GPU Xe3 Cores	GPU Max Freq. (GHz) /PTOPS	Memory	PCIe Lanes	vPro	Processor Base Power	Max. Turbo Power	cTDP	Operating Temp.
SOM-5886C9HG-U1A1	Intel Core Ultra X9 388H	16C (4P+8E+4LPE)	2.1GHz	5.0GHz	18MB	50	12Xe	2.5GHz/122	DDR5 7200	12	Yes	25W	64W, 80W	15W-65W	0-60°C
SOM-5886U9H-U1A1	Intel Core Ultra 9 386H	16C (4P+8E+4LPE)	2.1GHz	4.8GHz	18MB	50	4Xe	2.5GHz/40	DDR5 7200	20	Yes	25W	64W, 80W	15W-65W	0-60°C
SOM-5886C7HG-S9A1	Intel Core Ultra X7 358H	16C (4P+4E+4LPE)	1.9GHz	4.7GHz	18MB	50	12Xe	2.5GHz/122	DDR5 7200	12	No	25W	64W, 80W	15W-65W	0-60°C
SOM-5886C7H-S9A1	Intel Core Ultra 7 356H	16C (4P+8E+4LPE)	1.9GHz	4.6GHz	18MB	50	4Xe	2.45GHz/40	DDR5 7200	20	No	25W	64W, 80W	15W-65W	0-60°C
SOM-5886C5-U1A1	Intel Core Ultra 5 325	8C (4P+0E+4LPE)	2.1GHz	4.4GHz	12MB	47	4Xe	2.45GHz/40	DDR5 6400	12	No	25W	55W	12W-45W	0-60°C
SOM-5886C7HG-U5A1	Intel Core Ultra X7 368H	16C (4P+8E+4LPE)	TBD	TBD	18MB	50	12Xe	TBD	DDR5 7200	12	Yes	25W	64W, 80W	15W-65W	0-60°C
SOM-5886C5HX-U3A1	Intel Core Ultra 5 336HRE	12C (4P+4E+4LPE)	TBD	TBD	18MB	47	4Xe	TBD	DDR5 7200	20	Yes	25W	64W, 80W	15W-65W	-40-85°C

*Any other SKUs or combination is project based support. Please contact sales for details.

Development Board

Part No.	Description
SOM-DB5830-00A3	COMe Devel. Board COMe R3.1 Type6 pin-out (LVDS) 0 - 60 °C
SOM-DB5830A-00A3	COMe Devel. Board COMe R3.1 Type6 pin-out (eDP) 0 - 60 °C

Optional Accessories

Part No.	Description
TBD	QFCS

Packing List

Part No.	Description	Quantity
-	SOM-5886 COM module	1
TBD	Heatspreader	1

Embedded OS

OS	Part No.	Description
Win11	TBD	TBD
Ubuntu	TBD	TBD