

# UNO-MXM-CB01

## UNO Carrier Stack support MXM GPU module aim for image processing and AI inference



### Features

- PCIe x4 expansion kit support 35W MXM GPU
- Bundle compact Din-rail embedded PC form factor, UNO-148 series, with Intel® Core™ processors (13th/11th Gen)
- Expansion modules to accommodate MXM GPU module for powerful computing capabilities
- Support 4 independent display outputs (3 x DP, 1 x HDMI)
- Standalone heatsink and fan for GPU stable performance
- Support up to 8GB GDDR6 with ECC (depends on MXM module option)
- Industrial design with longevity support (5 years lifecycle compared to commercial GPU card 1 year)

### Introduction

Advantech's UNO-MXM carrier stack is equipped with UNO-148 series as smallest Intel Core-I PC with Nvidia MXM GPU module support; aim for multi-tasking like storage/image operation or graphics processing.

UNO-MXM-CB01 includes PCIe x 4 expansion kit which supports 35W MXM GPU, 4 display outputs (3 x DP, 1 x HDMI), and also modular stack to upgrade flexibility.

### Specifications

#### General

- **Certification** CE, FCC
- **Dimension (W x D x H)** 58.5 x 140 x 200mm (2.3 in x 5.5 in x 7.8 in)
- **Weight** 2.3kg (5.07 lb)
- **Power consumption** GPU TGP Max Power @35W

#### System Hardware

- **Expansion** 1 PCIe x4

#### I/O

- **I/O** 3 x DP 1.4, up to 4K (3840 x 2160) @ 120Hz & 1 x HDMI, up to FHD (1920 x 1080)

#### Environmental

- **Operation temperature** 0 ~ 55 °C
- **Storage temperature** -40 ~ 70 °C
- **Relative humidity** IEC60068-2-78, 95% @ 40 °C (non- condensing)

### Front I/O



### Ordering Information

- **UNO-MXM-CB01** MXM carrier stack


### Optional Accessories (GPU module)

- **SKY-MXM-A1000-4SLA** Quadro A1000 MXM 4GB Discrete mode Type A 35W (need to add 98R1X200000)
- **SKY-MXM-2000A-8SLA** Quadro 2000A MXM 8GB Discrete mode TypeA 35W (need to add 98R1X200000)

## Dimensions

Unit: mm

### UNO-148 with MXM Module

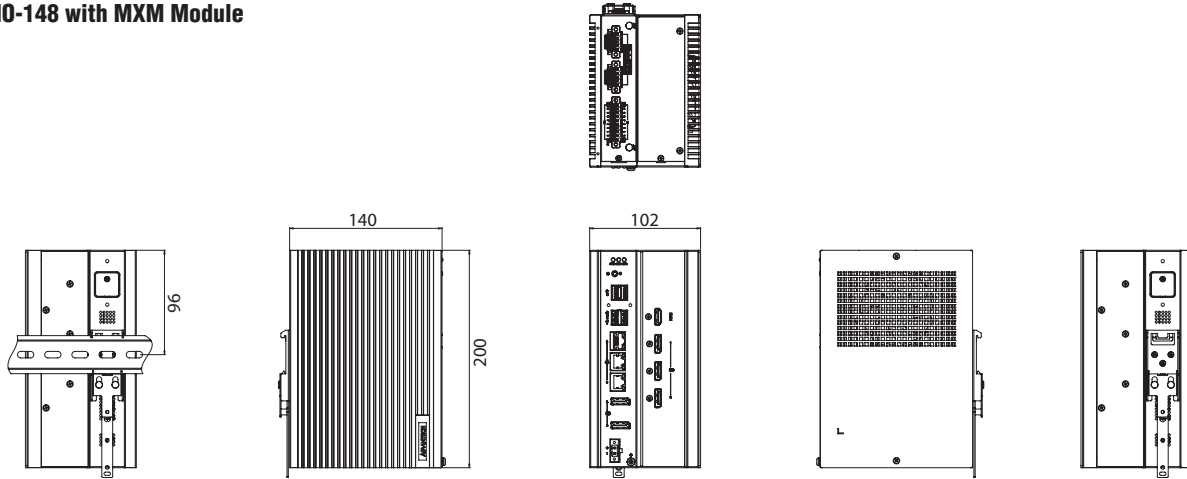

### UNO-148 V2 with MXM Module

