

USC-M17

17" Touch Monitor



Features


- Industry-leading ultra-narrow bezel design, meeting increasingly compact design concepts
- Rich interfaces with HDMI and VGA video input options
- Full-plane capacitive touchscreen
- 12V voltage input with built-in speakers as standard
- 3mm thick tempered glass front panel to prevent accidental impact damage
- Hanging design with black oxidized aluminum industrial texture and standard VESA holes on the back
- Fanless design with aluminum alloy casing, front panel IP65 protection rating

Specifications

LCD Display	Screen Size	17 inch
	Backlight Technology	LED
	Visible Area	338 x 270.3 mm
	Optimal Resolution	1280 x 1024 @60Hz
	Aspect Ratio	4: 3 (Standard)
	Viewing Angle	178°H/V
	Display Colors	16.7M Colors
	Response Time	20 ms (GTG)
	Brightness (cd/m ²)	250 nits
	Contrast Ratio	1000 : 1
	Backlight Life	30,000 hrs
Touch Screen	Touch Technology	Projected Capacitive (PCAP)
	Touch Points	10-Point Touch (under Windows 10)
	Transmittance	87% ± 3%
	Cover Glass	3mm physically tempered (silk print), (optional: AG/AR surface treatment), Mohs hardness 7H
	Waterproof Performance	Supports Touch with Water Mist or Light Rain (Optional)
Environment	Driver Support	Driver-Free under Windows, Driver Required for Linux
	Operating Temperature	0 ~ 50°C (32 ~ 122°F)
	Storage Temperature	-20 ~ 60°C (-4 ~ 140° F)
	Relative Humidity	10 ~ 95 % @ 40°C (Non-Condensing)
	Waterproof	Front Panel IP65 Protection Rating
Physical Characteristics	Case Color	Black
	Size	385.3 x 317.8 x 49 mm
	Shipping Size	500 x 470 x 160 mm (Single Package) 532 x 460 x 322 mm (four pack)
	Installation Size	100 x 100 mm M4 VESA
	Net Weight	5.4 Kg
I/O Ports	USB	1 x USB-B (Touch)
	VGA	1 x VGA
	HDMI	1 x HDMI (Type-A)
OSD Functions	OSD Control	5-key button
	OSD Language	Chinese/English/French/Italian/German/Spanish/Korean/ Russian/Portuguese
Power Consumption	Input Voltage	12V DC terminal, standard power adapter
	Static Power Consumption	15W
Others	Operating Hours	7 x 24hours
	Warranty	1-year standard warranty
	Safety Certification	CE, FCC, CCC

Dimensions

Unit: mm [inch]

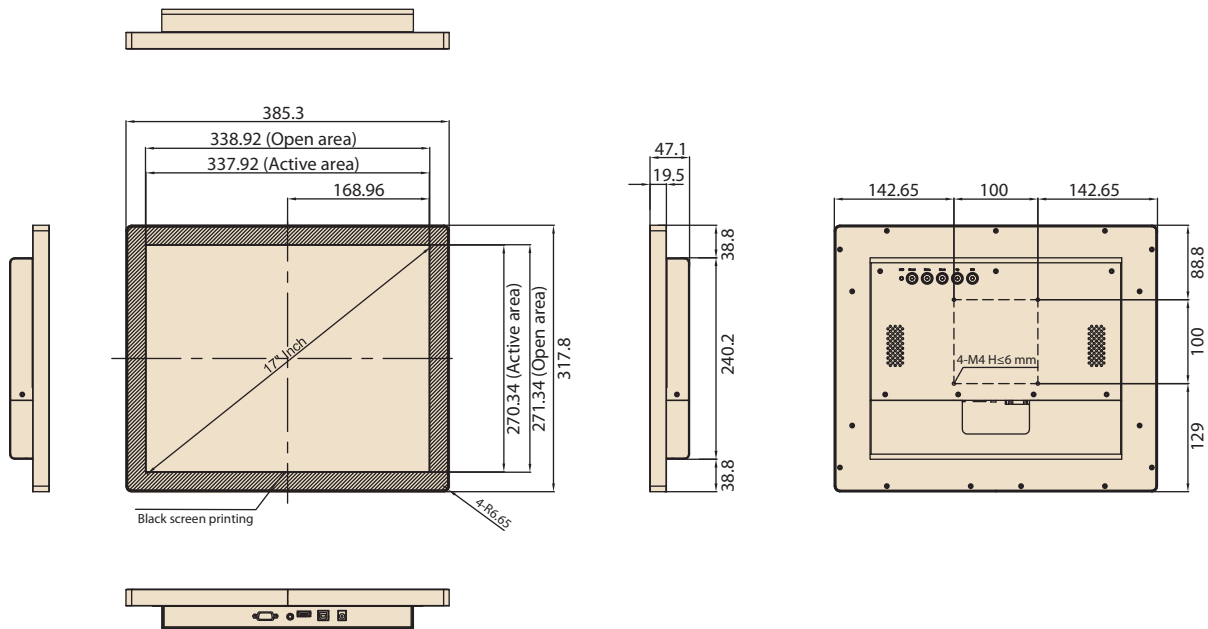


Ordering Information

Part Number	Description
USC-M17P-BST10	17" monitor, 4:3, PCAP, 250nits, HDMI, VGA, IO Cover, 3Y warranty

Packing List

Description
1 x USC-M17
1 x 12V power adaptor
1 x 1.8m HDMI cable
1 x 1.8m USB touch cable

Interface

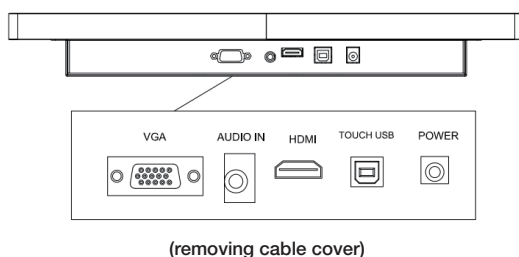

Accessories

Part Number	Description
ARES-1204G-AR01101	Wall Mount, sup 2~10kg, 75/100mm, enhancedVESA, BLK
ARES-12250-L101000	WallMount, max.support 25kg, 75/100mm
ARES-2424X-S170201	TableStand, Black, 21.5", max.15kg, 100x100 75x75
96CB-POWER-B-1.8MA	Power Cord (China), 3P 1.8M, BK(CCC)
17AP164900518011	Power Cord CEE 7/16+C13 L1.8M (CE)
1700013977	Power Cord 10A 250V 3P 180/90 CCC 200cm (CCC)
1702002600-01	Power Cord 3P UL/CSA(USA) 125V 10A 1.83M 180D
1700020098	Power Cord 3P 10A 250V 183CM (Australian)
1702002605	Power Cord 2P FRANCE 10A/16A 220V 1.83M 90D (EU)
1700001714	Power Cord BSMI 3P 7A 125V 18AWG 180CM (BSMI)
1700000237	Power Cord 3P PSE 12A 125V 1.83M (Japan)
1700032693-11	Power Cord BSI 2P 10A 250V 183cm (UK)
1700025855-01	Power Cord ISI 3P 10A 250V 183cm (INDIA)