

USC-M19

19" Touch Monitor



Features


- Industry-leading ultra-narrow bezel design, meeting increasingly compact design concepts
- Rich interfaces with HDMI and VGA video input options
- Full-plane capacitive touchscreen
- 12V voltage input with built-in speakers as standard
- 3mm thick tempered glass front panel to prevent accidental impact damage
- Hanging design with black oxidized aluminum industrial texture and standard VESA holes on the back
- Fanless design with aluminum alloy casing, front panel IP65 protection rating

Specifications

LCD Display	Screen Size	19 inch
	Backlight Technology	LED
	Visible Area	377.3 x 302.1 mm
	Optimal Resolution	1280 x 1024 @60Hz
	Aspect Ratio	4: 3 (Standard)
	Viewing Angle	165°H/V
	Display Colors	16.7M Colors
	Response Time	5 ms (GTG)
	Brightness (cd/m ²)	250 nits
	Contrast Ratio	1000 : 1
	Backlight Life	30,000 hrs
Touch Screen	Touch Technology	Projected Capacitive (PCAP)
	Touch Points	10-Point Touch
	Transmittance	87% ± 3%
	Cover Glass	3mm physically tempered (silk print), (optional: AG/AR surface treatment), Mohs hardness 7H
	Waterproof Performance	Supports Touch with Water Mist or Light Rain (Optional)
Environment	Driver Support	Driver-Free under Windows, Driver Required for Linux
	Operating Temperature	0 ~ 50°C (32 ~ 122°F)
	Storage Temperature	-20 ~ 60°C (-4 ~ 140° F)
	Relative Humidity	10 ~ 95 % @ 40°C (Non-Condensing)
	Waterproof	Front Panel IP65 Protection Rating
Physical Characteristics	Case Color	Black
	Size	422.8 x 347.5 x 49 mm
	Shipping Size	530 x 500 x 160 mm (Single Package) 570 x 520 x 330 mm (four pack)
	Installation Size	100 x 100 mm M4 VESA
	Net Weight	6.4 Kg
I/O Ports	USB	1 x USB-B (Touch)
	VGA	1 x VGA
	HDMI	1 x HDMI (Type-A)
OSD Functions	OSD Control	5-key button
	OSD Language	Chinese/English/French/Italian/German/Spanish/Korean/ Russian/Portuguese
Power Consumption	Input Voltage	12V DC terminal, standard power adapter
	Static Power Consumption	15W
Others	Operating Hours	7 x 24hours
	Warranty	3years
	Safety Certification	CE, FCC, CCC

Dimensions

Unit: mm [inch]

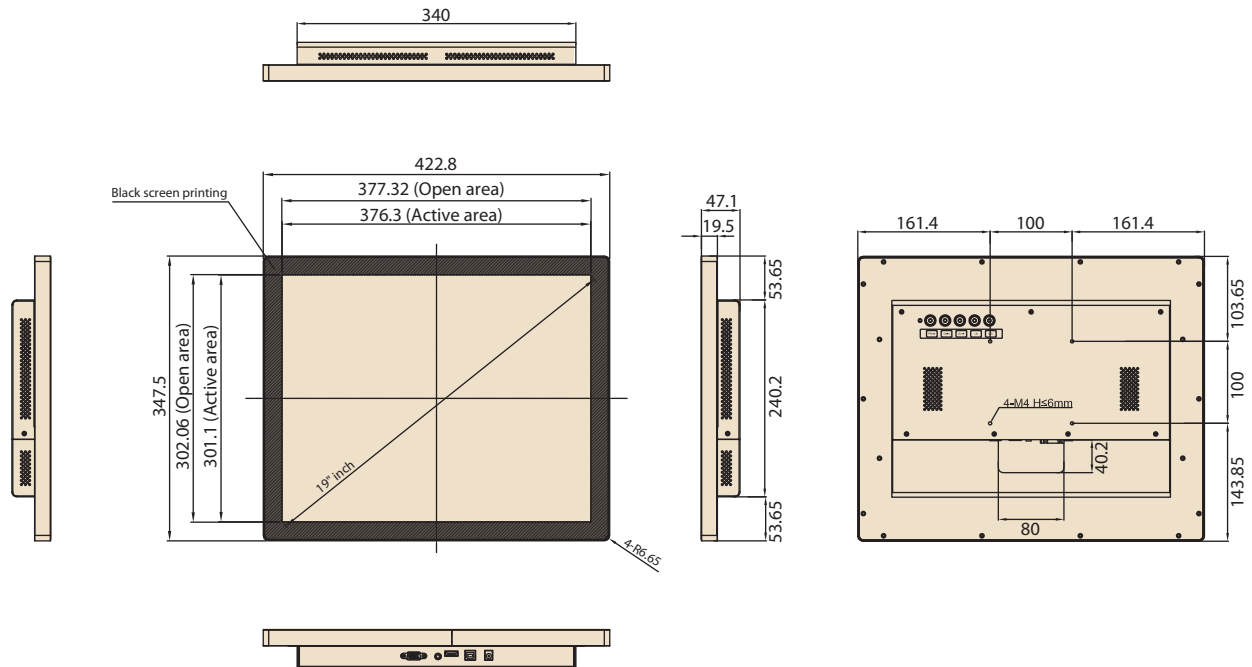


Ordering Information

Part Number	Description
USC-M19P-BST10	19" monitor, 4:3, PCAP, 250nits, HDMI, VGA, IO Cover, 3Y warranty

Packing List

Description
1 x USC-M19
1 x 12V power adaptor
1 x 1.8m HDMI cable
1 x 1.8m USB touch cable

Interface

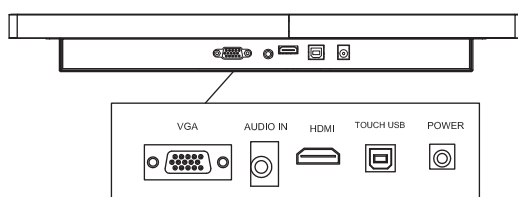

(removing cable cover)

Accessories

Part Number	Description
ARES-1204G-AR01101	Wall Mount, sup 2~10kg, 75/100mm, enhancedVESA, BLK
ARES-12250-L101000	WallMount, max.support 25kg, 75/100mm
ARES-2424X-S170201	TableStand, Black, 21.5", max.15kg, 100x100 75x75
96CB-POWER-B-1.8MA	Power Cord (China), 3P 1.8M, BK(CCC)
17AP164900518011	Power Cord CEE 7/16+C13 L1.8M (CE)
1700013977	Power Cord 10A 250V 3P 180/90 CCC 200cm (CCC)
1702002600-01	Power Cord 3P UL/CSA(USA) 125V 10A 1.83M 180D
1700020098	Power Cord 3P 10A 250V 183CM (Australian)
1702002605	Power Cord 2P FRANCE 10A/16A 220V 1.83M 90D (EU)
1700001714	Power Cord BSMI 3P 7A 125V 18AWG 180CM (BSMI)
1700000237	Power Cord 3P PSE 12A 125V 1.83M (Japan)
1700018704	Power Cord BSI 2P 10A 250V 180cm (UK)
1700025855-01	Power Cord ISI 3P 10A 250V 183cm (INDIA)