


UTC-115

15.6" Ubiquitous Touch Computer

UTC-115K with 12th Gen Intel® Core™ N97 / i3-N305 Processor

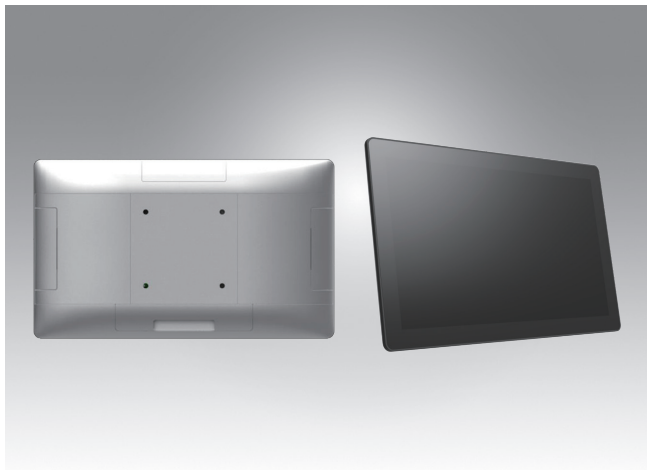

DeviceOn/iService

Features

- Slimmer and Lighter design
- Low power and fanless system design
- Built-in Intel® N97/i3-N305
- 15.6" monitor with 16:9 widescreen display
- IP65-rated front panel for water and dust resistance
- Clean back cover design with 3 Way IO cable routing
- Supports landscape and portrait orientations with VESA 100 mm standard mounting holes
- Supports PoE for simplified power and network deployment
- Support DeviceOn/iService software for remote device management



Introduction

UTC-115 features an all-in-one computing system which equipped with wide format, touch based LCD panel. It is easy to integrate key peripherals and display systems for diversified self-service and interactive signage deploy in different application areas.

Thanks for the slim and light looking with 3 way cable routing design, makes UTC-115 good fit to diverse scenarios and areas.

The systems deliver updated information with well-designed interactive interfaces, with fully ensure relevant content and targeted promotions are delivered. UTC series touch panel computers are the best investments to enhance user satisfaction, further brand equity, and maximize business profits.

Moreover, Advantech DeviceOn/iService Software is a next-generation unified device management unified device management solution based on the WISE-DeviceOn platform. With support for batch operations and multi-device control, DeviceOn/iService enables easy device configuration and deployment for convenient remote device management.

Specifications

Process system	CPU	Intel Processor N97 Intel Core i3-N305
	Base Frequency	N97: 2.0 GHz (4 cores) i3: 1.8 GHz (8 cores)
	Memory	1 x 262pin SO-DIMM DDR5 4800MHz up to 16GB
	Storage	1 x 2.5 internal SATA storage*, M.2 2242/2280 SSD
	Network	2 x Gigabit Ethernet ports (Supports Wake on LAN)
	I/O Ports	2 x RS-232 COM (COM2 RS-232/422/485)
		2 x USB 3.2 Gen1 Type-A
		2 x USB 2.0
		1 x USB 3.2 Gen 1 Type-C
		1 x DC-in USB Type-C
	Stereo Speaker	2 x Gigabit Ethernet ports (with optional PoE 55W)
		1 x HDMI 1.4
OS Support	1 x Audio Phone Jack	
	Bus expansion	2 x 2W
	Mounting	1 x M.2 key2230, 1 x M.2 key2280
	Dimension (WxHxD)	VESA 100 x 100 mm (Screw Size, M4, 7mm)
	Weight	398.8 x 248.2 x 29.5 mm
		2.4kg
		Win 10/11 IoT Enterprise 64bit
		Linux, Android 14
Environment Specification	Operating temperature	0 ~ 40 °C (32 ~ 104 °F)
	Relative Humidity	10 ~ 95% @ 40 °C non-condensing
	Vibration	1.5G
	Shock	Shock 10G peak acceleration(11 msec. duration)
	Certification	CE, FCC, CB, UL, CCC, BSMI
	Front Panel Protection	IP 65 Compliant
Power Supply	DC Input Rating	20V/4.5A (90W)
	Power consumption	45W
LCD Display	Size/Type	15.6" FHD
	Max.Resolution	1920 x 1080
	Max. Color	262K
	Pixel Pitch (um)	179(H) x 179(V)
	Brightness (cd/m²)	400
	View Angle	170°/170°
Touch Screen Option	Type	Projected Capacitive.
	Light Transmission	> 85%
	Controller	USB Interface
TPM		TPM 2.0

Specifications (Cont.)


DeviceOn/iService Remote Device Management	Operating System	Windows 10 / Windows 11
	Common Controls (Reboot, Shutdown)	✓
	Remote desktop	✓(VNC)
	Device-Specific Controls (Audio)	✓*
	Connection Status	✓
	Hardware Status	✓*
	Hard Disk Status	✓*
	Batch Operation Support	✓
	OTA Storage Management	FTP
	OTA Software Updates	✓
	Software Watchlist	✓
	Software Start/Stop	✓*
	Kiosk Mode	
Dependent on device model	Peripherals Watchlist	✓

Note: DeviceOn/iService software must be downloaded from the Advantech website at <https://www.advantech.com/search/?q=DeviceOn%2FiService&st=support&sst=Utility>
 Note: It will block some IO ports on the same side.


Dimensions

Unit: mm

UTC-115K (N97)


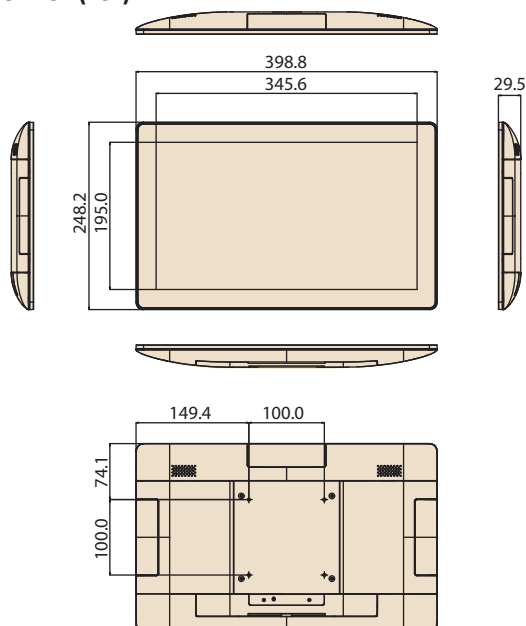


UTC-115K (i3)

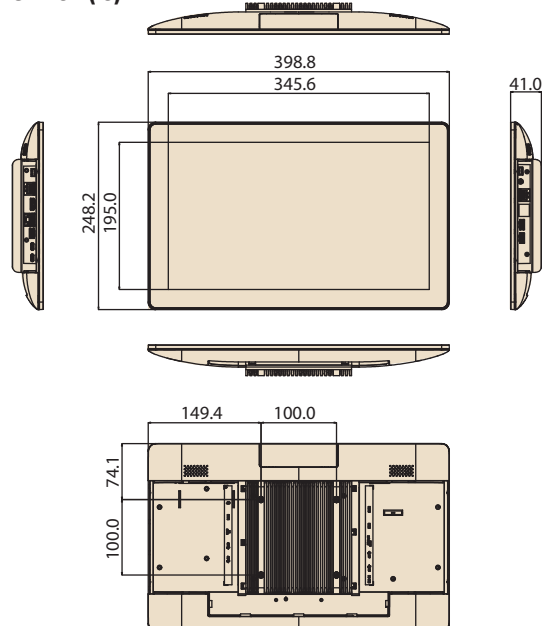

Note: The VESA mounting hole depth is 6 mm. Select the screw length according to the VESA plate thickness. M4 × 6 mm screws may be used when the plate thickness is less than 2 mm.

Fully- Integrated I/O

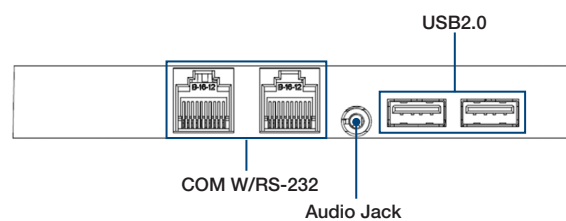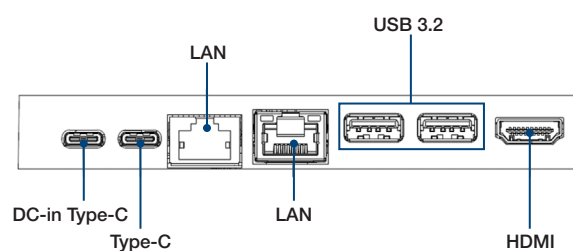

Ordering Information

For Worldwide Model

Part No.	Descriptions
UTC-115KP-WWW1F	15.6" Pcap, FHD 1920x1080, N97 CPU, 8G RAM, 128G SSD, Win11 IOT, WiFi/BT, Silver
UTC-115KP-NWW1F	15.6" Pcap, FHD 1920x1080, N97 CPU, 8G RAM, 128G SSD, WiFi/BT, Silver, No OS
UTC-115KP-NWW1P	15.6" Pcap, FHD 1920x1080, N97 CPU, 8G RAM, 128G SSD, WiFi/BT, Silver, No OS, PoE
UTC-115KP-WWF1F	15.6" Pcap, FHD 1920x1080, i3-N305 CPU, 8G RAM, 256G SSD, Win11 IOT, WiFi/BT, Silver

For US only Model

Part No.	Descriptions
UTC-115KP-WUS1F	15.6" Pcap, FHD 1920x1080, N97 CPU, 8G RAM, 128G SSD, Win11 IOT, WiFi/BT, Power cord, Silver
UTC-115KP-WUF1F	15.6" Pcap, FHD 1920x1080, i3-N305 CPU, 16G RAM, 256G SSD, Win11 IOT, WiFi/BT, Power cord, Silver

Extra ordering information

Part No.	Descriptions
1700001524	Power Cord UL 3P 10A 125V 183cm (US)
170203183C/170203183C-01	Power Cord EU 3P 2.5A 250V 183cm (EU)
1700019146	Power Cord CCC 3P 2.5A 250V 183cm (China)
170203180A	Power Cord BSI 3P 2.5A 250V 183cm (UK)
1700008921	Power Cord PSE 3P 7A 125V 183cm (JP)
1700025928-03	COM Port Converter cable RJ48-10P10C to D-SUB 9P 35cm
1960102654N001	VESA 100-to-75 adapter bracket for UTC-115/120/124
1930004980	M4 screw for VESA adapter bracket (4 pcs required for VESA installation)
UTC-100P-STAND0E	L Stand for UTC-115
UTC-300P-D20E	Desk Stand, Silver, for UTC-115/120
UTC-UPOS-STAND0E	Double Hinge Stand
UTC-AVALO-STAND0E	Avalo Stand
ARES-2423X-S151001	Table Stand for UTC-115 (Black)
ARES-2425X-S271001	Tilt Table Stand for UTC-100 Series (Black) (Support Portrait & Landscape)
ARES-12250-L101000	Vesa Wall-mount for UTC-100 Series (Black)

Peripheral Mountable on All 4 Sides



Peripherals for UTC-100(AIO system) series

Part No.	Description
UTC-100P-B11E	2D Barcode Scanner for UTC-115/120/124
UTC-100P-C10E	5M Camera for UTC-115/120/124
UTC-100P-R10E	RFID Scanner for UTC-115/120/124
UTC-100P-R30E	RFID Reader (NFC) for UTC-115/120/124
UTC-100P-M10E	MSR Reader for UTC-115/120/124
UTC-100P-S10E	Smart Card Reader for UTC-115/120/124
UTC-100P-L10E	LED Light Bar for UTC-115/120/124
UTC-100P-F10E	Finger Print Reader for UTC-115/120/124

DeviceOn/iService

Unified Remote Device Management Software




Features

- Supports Advantech devices equipped with Windows, Android, and Linux OS
- Flexible device, location, user, and permissions management
- Enables remote monitoring and control of hardware, software, and peripherals
- Supports over-the-air (OTA) firmware and software updates
- Ensures quick, easy, and secure device onboarding
- RESTful APIs for third-party system integration

Introduction

Advantech's DeviceOn/iService is a next-generation unified device management solution based on the WISE-DeviceOn platform. Designed to enable centralized monitoring and remote management, DeviceOn/iService supports Advantech devices equipped with Windows, Linux, or Android operating systems. The software also supports the management of applications and integrated peripherals, such as a barcode scanner, card reader, camera, and printer. Users can remotely access and control connected devices, take screenshots, rollout OTA upgrades, and use remote desktop capabilities for troubleshooting from any location at any time. Moreover, DeviceOn/iService supports batch operations to facilitate the management of multiple devices simultaneously for easy and convenient device configuration and deployment.

Total Management



Devices & Hardware

- Windows, Linux, Android
- Hardware, storage, battery



Software & Peripherals

- Software monitoring & access
- Screens, USB devices, printers



Open for Expansion


- Peripheral integration
- Open APIs for integration

Remote Access



Real-Time Monitoring

- Connection/hardware status
- Software/peripheral status
- Failure notifications



Remote Controls

- Power controls
- Audio, backlight controls
- Software controls



Troubleshooting

- Screenshots
- Remote desktop support

Operational Efficiency



OTA updates

- System/software updates
- File repository management
- App store



Batch Controls

- 1-to-many batch reboot, etc.
- Time-saving tasks



Setup Booster

- Software/peripheral watchlist
- Roles, rule templates

Note: Some functions may vary according to the product

System Architecture

