


XMT-F150

15.0" PCAP Touch Panel Mount

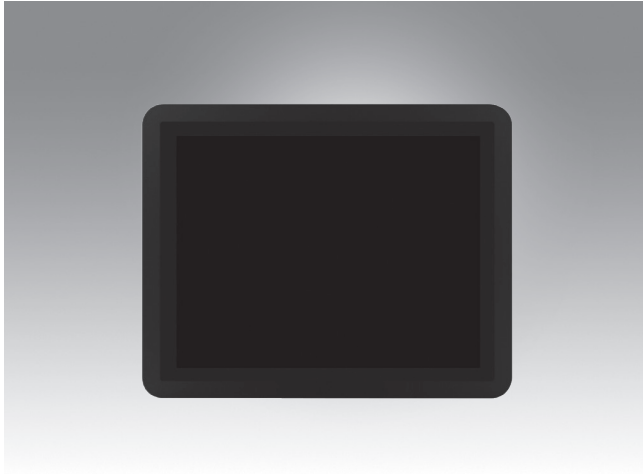

Features

- 15.0" active screen size with PCAP touch function
- Standard video inputs: VGA, HDMI, and DVI
- Front IP64 waterproof level
- Industrial-grade panel for durable use

Specifications

Display	Active Screen Size	15.0 inch	
	Resolution	1024 x 768 (XGA)	
	Brightness	350 nits	
	Contrast Ratio	700:1 (Typ.)	
	Aspect Ratio	4:3	
	Viewing Angle	85° / 85° / 80° / 80°	
	Response Time	5.7 ms (Typ.)	
	Backlight Life (hours)	50,000 (Typ.)	
Touch	Touch Type	Projected Capacitive Touch (PCAP)	
Connectivity	Video Input	VGA x 1, HDMI x 1, DVI x 1	
	Other slot/ports	USB2.0 x 1 (for touch)	
Control	OST Function	Hot key (ON/OFF, LEFT, RIGHT, MENU, AUTO)	
	OST Language	Simplified Chinese, English, French, Italian, Russian, Spanish, German, Portuguese	
Power	Power Type	DC input, with phoenix connector	
	Power Input	9-36V _{DC}	
	Power Consumption	20 W	
Environment	Operating	Temperature	-20 ~ 60 °C
		Humidity	20 to 85 %
	Storage	Temperature	-30 ~ 70 °C
		Humidity	20 to 85 %
Mechanical Specification	Housing Material	1.2 mm Aluminum	
	VESA Compatibility	75 x 75+100 x 100 mm	
	Hand Holder/Stand	No	
	Dimensions (W x H x D)	Physical without stand	380 x 304 x 54.2 mm
		Packing	510 x 440 x 185 mm
	Weight	Net	4.75 KG
Gross		7 KG	
Approbation		CE, FCC	
Warranty		2-year (1-year for panel)	

Ordering Information

Part number	Description
XMT-F150XG350PI-C0	15.0" PCAP Touch Panel Mount

Optional Accessory

Part number	Description
96PSA-A65W19P2-1	AC to DC 100-240V 65W 19V C6 Terminal Block 2 Pin Adapter