#### **USB to RS-232 Converters**



#### **Features**

- Connect RS-232 devices to your USB port
- RS-232 data rates up to 921.6 kbps
- USB 2.0 full speed compatible (12 Mbps)
- In-line installation
- USB port-powered
- USB cable included (all models)
- 2 kV isolation option (by model)
- High retention USB port options (by model)
- Locked serial number option (by model)



## Introduction

Advantech USB converters add one RS-232 port to your PC's USB port with 12 Mbps full speed USB 2.0. Models with 2 kV optical isolation protect from voltage spikes and ground loops. "High retention USB port" option is 50% stronger than regular USB ports gripping standard USB cables in demanding applications. "Locked Serial Number" options use the same serial number with like models so, if a converter is shared by field service laptops, the locked serial number lets you plug-&-play without matching.

## **Specifications**

#### **Serial & Isolation Technology**

			Optical	ESD	Locked	
Model #:	Connector:	Data Rate:	Isolation:	Protection:	Serial #:	LEDs:
ULI-321D		001 C Vbps	_		_	
ULI-321DK	DD0I-	921.6 Kbps		_	Yes	_
ULI-321DC	DB9 male	460.8 kbps	2 kV	4kV contact, 8kV air	_	TD. RD
ULI-321DCK		400.0 KUPS			Yes	וט, חט

#### · FIFO Buffers

Model #:	FIFO TX	FIFO RX
ULI-321D	128 bytes	256 bytes
ULI-321DK	Data from USB Data OUT endpoint is stored in FIFO TX buffer and removed from buffer to UART Transmit Register under control of UART FIFO controller.	Data from UART Receive Register is stored in FIFO RX buffer prior to being removed by SIE on a USB data request from device Data IN end-point.
ULI-321DC		
ULI-321DCK	_	_

#### **USB Technology**

Model #:	USB Port Connector:	Data Rate:	Standards:
ULI-321D	LICD Time D female		2.0
ULI-321DK	USB Type B female	12 Mbps	(backwards compatible)
ULI-321DC	USB Type B female, high retention		1 1 0 0 (at full appead)
ULI-321DCK	3.4 lb (1.54 kg), 15N withdrawal force		1.1. 2.0 (at full speed)

#### **Environmental**

• Operating Temperature 0 to +70 °C · Storage Temperature -40 to +85°C Humidity 95%, non-condensing

#### **Power**

Model #:	Source:	Input Voltage:	Consumption:
ULI-321D			
ULI-321DK	LICD	5 Vdc	<0.5 W
ULI-321DC	USB port		(low power, <100 mA)
ULI-321DCK			

#### Mechanical

Model #:	Enclosure, Mounting:	Dimensions, mm:	USB Cable, included, length:	Weight, gm with cable:
ULI-321D	Plastic miniature,	58 x 32 x 16		104.3 am
ULI-321DK	In-line installation	30 X 32 X 10	0.9 m	104.5 giii
ULI-321DC	IP30 plastic,	76.2 x 42.7 x 20.1	0.9 111	100 am
ULI-321DCK	In-line installation	10.2 x 42.1 x 20.1		180 gm

#### **Software**


Model #:	Drivers:	Windows O/S:	Linux:	
ULI-321D		Windows 8/10/11		
ULI-321DK	FTDI Virtual COM	WIIIUUWS 0/ 10/ 1 1	Ubuntu 11.10,	
ULI-321DC	Port (VCP) Driver	Windows 7/8/8.1/10/11	Kernel version 3.0.0	
ULI-321DCK		WIIIUUWS 7/0/0.1/10/11		

#### Meantime Between Failures (MTBF)

 Calculation Method MIL217F Parts Count Reliability Prediction

Model #:	Hours:
ULI-321D	1046006
ULI-321DK	1946086
ULI-321DC	247713
ULI-321DCK	247713

ULI-321D BB-232USB9M ULI-321DK BB-232USB9M-LS ULI-321DC BB-USO9ML2-A ULI-321DCK BB-USO9ML2-LS-A

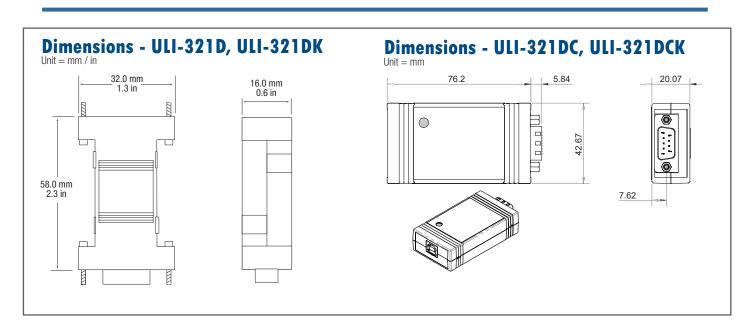

# **Ordering Information**

Model Number	Part Number to Order	Description
ULI-321D	BB-232USB9M	USB to RS-232 Converter – USB B-female to (1) Serial DB9m, 921.6 kbps / 12 Mbps
ULI-321DK	BB-232USB9M-LS	USB to RS-232 Converter – USB B-female to (1) Serial DB9m, 921.6 kbps / 12 Mbps, Locked Serial# (shared serial# & COM port)
ULI-321DC	BB-US09ML2-A	USB to RS-232 Converter – High-retention USB B-female to (1) Serial DB9m, 460.8 kbps / 12 Mbps, 2 kV Isolation
ULI-321DCK	BB-USO9ML2-LS-A	USB to RS-232 Converter – High-retention USB B-female to (1) Serial DB9m, 2 kV Isolation, 460.8 kbps / 12 Mbps, Locked Serial# (shared serial# & COM port)

# **ULI-320** Series Selection Guide

**USB to RS-232 Converters** 



### **Common Features**

- Connect an RS-232 device to your USB port
- RS-232 data rates up to 921.6 kbps
- USB 2.0 full speed compatible (12 Mbps)
- In-line installation
- USB port-powered
- USB cable included (all models)
- 2 kV isolation option (by model)
- High retention USB port options (by model)
- Locked serial number option (by model)

## **USB to RS-232 Converters Comparison Table**

Model Number	ULI-321D	ULI-321DK	ULI-321DC	ULI-321DCK		
Part Number to Order	BB-232USB9M	BB-232USB9M-LS	BB-USO9ML2-A	BB-US09ML2-LS-A		
Description	USB to Serial Converter, DB9M, Type B Isolated, High Retention Type E		B to Serial Converter, DB9M,			
USB Port Count			1	· · ·		
USB Connector	l	JSB Type B female, standard	USE	USB Type B female, high rentention		
High Retention Connector		_	✓ 3.4	lb (1.54 kg), 15N withdrawal force		
USB Data Rate, max.			12 Mbps			
USB Standard		2.0 (backwards compatible)		1.1, 2.0 (at full speed)		
Serial Port Count			1			
Serial Connector			DB9 Male (DTE)			
Serial Interface			RS-232			
Serial Data Rate, max.		921.6 kbps		460.8 kbps		
Isolation, Optical		-				
Locked Serial Number*	_	- ✓		✓		
Operating Temperature		0 to +70 °C				
Power Source		USB port				
Power Input			5 Vdc			
Enclosure	F	Plastic, miniature form factor		IP30 plastic		
Mounting Installation			In-line installation			
Dimensions, mm		58 x 32 x 16 mm		76.2 x 42.7 x 20.1 mm		
MTBF (MIL217F), hours		1946086		247713		
			FCC, CE, RoHS, WEEE			
	EMC:					
		EN 55011:2016+A2:2021 Class A Group 1				
		BS EN 55011:2016+A2:2021 Class A Group 1				
Regulatory / Approvals /	CISPR 11:2015+AMD1:2016+AMD2:2019 Ed 6.2 Class A Group 1					
Certifications	EN 55032:2015+A1:2020 Class A / BS EN 55032:2015+A1:2020 Class A					
		CISPR 32:2015+AMD1:2019 Class A				
		EN IEC 61000-6-4:2019 / BS EN IEC 61000-6-4:2019				
		EN 55035:2017+A11:2020 / BS EN 55035:2017+A11:2020				
			EN IEC 61000-6-2:2019 / BS EN IEC 61000-6-2:2019			
		EN 61000-4-2:2009 / EN IEC 61000-4-3:2020 / EN 61000-4-8:2010				

#### \*Locked Serial Numbers Explained

Advantech configures single-port USB to serial converters in two ways:

- 1. Standard Serialized format each product has a unique serial number. If your converter will always be used with the same computer, the standard serialized model is all you need.
- 2. Locked Serial Number format uses the same serial number that is associated with a model type. If the converter is shared among several computers, like field service laptops, the locked serial number model lets you plug-and-play without having to worry about matching the two.

Description	Serialized	Locked Serial Number
Every unit is assigned a unique COM port	✓	_
Same type model numbers share same COM port	_	✓
Ideal Applications	Fixed locations	Field service