ACP-2020

2U Rackmount Short Depth Chassis for ATX and uATX Motherboard



Features

- 398 mm short depth 2U rackmount chassis
- Supports ATX and uATX form factor single processor motherboard
- Two Internal 2.5" drive bay and two "hot-swap or external" drive bay
- Supports 80 Plus single 350W or 500W redundant power supply
- Front-accessible system fan without opening top cover for easy maintenance
- Built-in Intelligent System Module enabling whole system fan control and remote manageability

C € FCC

Slim ODD drive bay

Specifications


Drive Bay		External	Internal	
	Slim Optical Drive	1	-	
	2.5"	2 (hot-swap tray module as optional)*	2	
Cooling	Fan	1 (8 cm/46.62CFM)		
	Air Filter	Yes		
Front I/O Interface	USB 3.0*	2		
Miscellaneous	LED Indicators	Power, HDD, temperature, fan, LAN1, and LAN2		
	Rear Panel	Two 9-pin D-Sub		
Intelligent System Module	CPU/System fan speed, CPU/System temperature			
Hardware Monitoring	(Only Advantech AIMB-78X, PCÉ-51XX/71XX mainboards can enable CPU fan speed and temperature monitoring function of Intelligent System Module)			
Environment		Operating	Non-Operating	
	Temperature	0 ~ 40 °C (32 ~ 104 °F)	-20 ~ 60 °C (-4 ~ 140 °F)	
	Humidity	10 ~ 85% @ 40 °C, non-condensing	10 ~ 95% @ 60 °C, non-condensing	
	Vibration (5 ~ 500 Hz)	1 Grms	2 G	
	Shock	10 G (with 11 ms duration, half sine wave)		
Physical Characteristics	Dimensions (W x H x D)	482 x 88 x 398 mm (19" x 3.46" x 15.7")		
	Weight	8.6 kg (18.96 lbs)		

The USB 3.0 ports do not operate if the motherboard has no on-board USB 3.0 box header.

LED indicators


Front View

Rear View

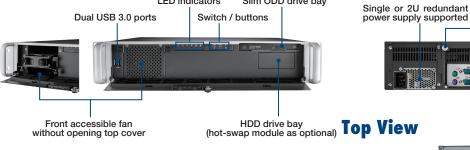




Optional SATA/SAS hot-swap tray module 98R1310010E



Thumb screws

Internal 2.5" HDD x2 drive bays

^{*} ACP-2020 2.5" drive bay, both default internal and hot-swap tray module support 2.5" HDD with thickness less than 14.7mm.

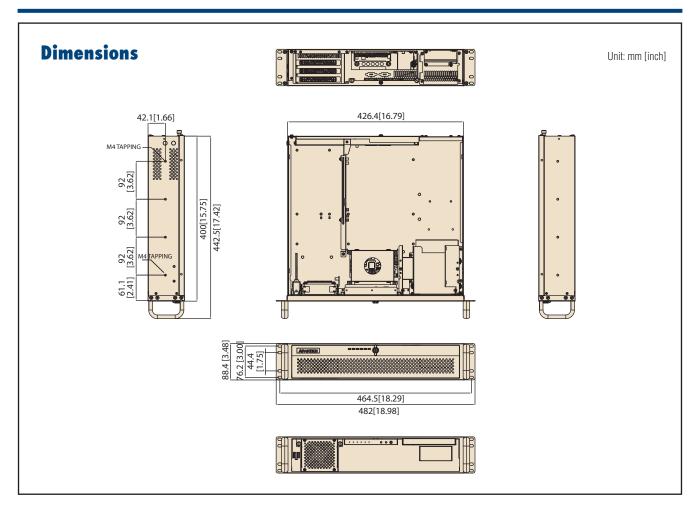

Ordering Information

Part Number	Power supply	80 Plus grade	Power supply type	Wattage	Switch
ACP-2020MB-35B	PS8-350FATX-GB	Gold	Single	350W	ATX
ACP-2020MB-50RE	RPS8-500U2-XE	Bronze	1+1 redundant	500W	ATX

Suggest using CPU cooler 1960052651N021, max. CPU TDP 84W.

Packing List

_				
Part Number	Description	Quantity		
ACP-2020	2U rackmount chassis with handle set	1		
1750009329-01	system fan	1		
1700024778-11	system fan cable	1		
Content of Accessory Box				
98R22020000	Handle set	1		
	Screws/nuts and rubber for motherboard and devices	one bag		
1960073134N000	HDD convert bracket , 3.5" to dual 2.5" (max T:14.7mm)	2		
2001202000	user manual	1		

Optional Accessories

Part Number	Description		
96CB-SATAPOWER-6P2	SATA power wire 6-pin to big 4-pin (for slim ODD)		
1990021407T000	Door filter		
98R1310010E	2.5" SATA/SAS Hot-swap module		
ASMB-RM2F4-11A1	2U riser card with 1 PClex16 & 1 PClex4 expansion		
Rear I/O panel kit for low-profile add-on cards			
1939000361	Screws (should purchase 7 pcs)		
1960074850T000	I/O bracket (should purchase 7 pcs)		
1960019475T206	Rear panel for low-profile		