ACP-4320

Quiet 4U Rackmount Chassis with Dual Hot-Swap SATA HDD Trays



Features

- Supports either an ATX motherboard or a PICMG backplane with up to 15 slots
- Supports dual SATA hot-swap HDD trays
- LED indicators and alarm notification for system fault detection
- Low noise system fans
- Built-in Intelligent System Module enabling whole system fan control and remote manageability

Quiet Specifications

C € FCC


		External	Internal
Driver Bay	5.25"	2	-
	3.5"	1 SATA Tray	-
	Hot Swap	2 (compatible with 3.5" or 2.5" devices)	
	Fan	1(12 cm/74 CFM) + 1 (6cm / 28 CFM)	
Cooling	Air Filter	Yes	
Cooling	Smart Fan	System fan speed referring to chassis thermal senso (Available with selected Advantech MBs/CPU cards)	
Front I/O Interface	USB 2.0	2	
	LED Indicators	Power, HDD, temperature, fan, LAN1 and LAN2	
Miscellaneous	Rear Panel	Backplane version: One 9-pin D-Sub opening Motherboard version: Five 9-pin D-Sub opening an	d one 25-pin D-sub opening
Intelligent System Module Remote Monitoring	CPU/System fan speed, CPU/system temperature, motherboard voltage (Only selected Advantech MBs/CPU cards with WISE-PaaS/RMM installed can fully enable these functions, check with Advantech local rep. for detailed information.)		
		Operating	Non-Operating
	Temperature	0 ~ 40 °C (32 ~ 104 °F)	- 20 ~ 60 °C (-4 ~ 140 °F)
Environment	Humidity	10 ~ 85% @ 40 °C , non-condensing	10 ~ 95% @ 40 °C, non-condensing
	Vibtration (5 ~ 500 Hz)	1 Grms	2 G
	Shock	10G (with 11 ms duration, half sine wave)	
Physical Characterisitics	Dimension (W x H X D)	482 x 177 x 479 mm (19" x 7.0" x 18.9")	
i ilysicai Giidideleiisilles	Weight	17.6 kg (38.7lb)	

Front View

System reset button Alarm reset button Dual USB ports Two 5.25" drive bays Two SATA HDD trays

Inside View



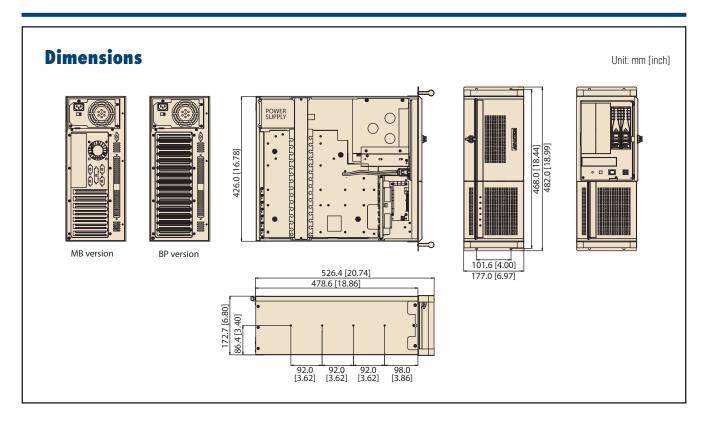

Ordering Information

Part number	Power supply	Wattage	Switch type
Backplane version			
ACP-4320BP-25BE	PS8-250ATX-ZE	250W	ATX
ACP-4320BP-40BE	PS8-400ATX-ZE	400W	ATX
ACP-4320BP-50BE	PS8-500ATX-ZE	500W	ATX
Motherboard version	1		
ACP-4320MB-25BE	PS8-250ATX-ZE	250W	ATX
ACP-4320MB-40BE	PS8-400ATX-ZE	400W	ATX
ACP-4320MB-50BE	PS8-500ATX-ZE	500W	ATX

Optional Accessories

Part Number	Description
IPC-DT-3120E	Mobile rack for converting a 3.5" drive bay to dual 2.5" SATA HDD trays
IPC-DT-5230E	Mobile rack for converting dual 5.25" drive bays to three 3.5" SATA HDD trays
1700007351	M Cable SATA 7P/SATA 7P 40CM C=R 90/180

When choosing ASMB-781, ASMB-782, ASMB-820, ASMB-823 for system mother board, 2pcs right-angle SATA cable (PN: 1700007351) are necessary for hot-swap driver bay.

Spare Parts

•	
Part Number	Description
1990001299	Fan filter 95 x 130 mm
1990001298	Door filter 150 v 68 mm