

EPC-U2217

Intel Atom Platform Palm Size Fanless system



Features

- Intel® Apollo Lake E3900 series Processor
- Palm-size form factor: 170 X 117 X 52.6 mm
- Supports 3 x LAN, 4 x COM port, 1 x HDMI, 1 x Display Port, 4 x USB3.0, CANBus, 16bit GPIO, Audio in/out and DCIN 12-24V
- Built-in 1 x M.2 expansion slot (PCIe Gen2, USB 2.0 co-lay), 1 x Full size Mini PCIe expansion slot (SATA, USB 2.0 co-lay)
- Supports onboard eMMC, and 1 x 2.5" HDD or SSD storage
- Wide operating temperature -20 ~ 60 °C support
- Complete certification for EMC and Safety




Specifications


		EPC-U2217
Processor System	CPU	Intel Apollo Lake Atom series Processor
	L2 Cache	2MB
	BIOS	AMI EFI 16 Mbit
Memory	Technology	Dual channel DDR3L 1867MHz, up to 8GB
	Socket	One 204-pin SO-DIMM
	Chipset	Intel Apollo Lake E3900 Series SoC
Graphics	Interface	HDMI: 1, max resolution up to 3840 x 2160 @ 30Hz
		DP1.2: 1, max resolution up to 4096 x 2160 @ 60Hz
Ethernet	LAN	Support Dual 10/100/1000Mbps
		LAN1 & 2: Intel i210 LAN 3: Realtek RTL8111H
I/O Interface	Serial Ports	3 x RS-232, 1 x RS-485
	USB Interface	4 x USB3.0 port
	SATA	1 x SATA interface, support 2.5" SSD & HDD
	TPM	Infineon SLB9665 chip onboard. Support TPM2.0 (Option)
Expansion	Mini PCIe	1 x Full-Size Mini PCIe (SATA, USB 2.0 co-lay)
		1 x M.2 E key (PCIe Gen2, USB 2.0 co-lay)
Storage	2.5" SSD	1 x SATA II SSD bay
	mSATA	1 x co-lay with F/S miniPCIe slot
	eMMC	1 x 153 ball type
Power Requirement	Power Input Voltage	12 ~ 24 V
	Power Adaptor	AC to DC, DC12 ~ 24 V
Power Consumption	Typical	12V@0.898A
	Max	12V@1.409A
	Power Type	AT/ATX by Jumper option
Mechanical	Construction	Aluminum
	Mounting	Support Wall Mount (Default) VESA/DIN Rail (Optional)
	Dimensions (W x H x D)	Chassis: 170 (L) x 117 (W) x 52.6 mm (H)
Environmental and Certifications	Operating Temperature	-20 ~ 60 °C
	Storage Temperature	-40 ~ 85 °C
	Relative Humidity	95% @ 40 °C (non-condensing)
	Vibration During Operation	With SSD: 3Grms, 60068-2-64, random, 5 ~ 500 Hz, 1 hr/axis
	Shock During Operation	With SSD: 30G, IEC 60068-2-27, half sine, 11ms duration
	EMC	CE/FCC Class B
	Safety Certifications	CCC, BSMI

Dimensions


Unit: mm [inch]

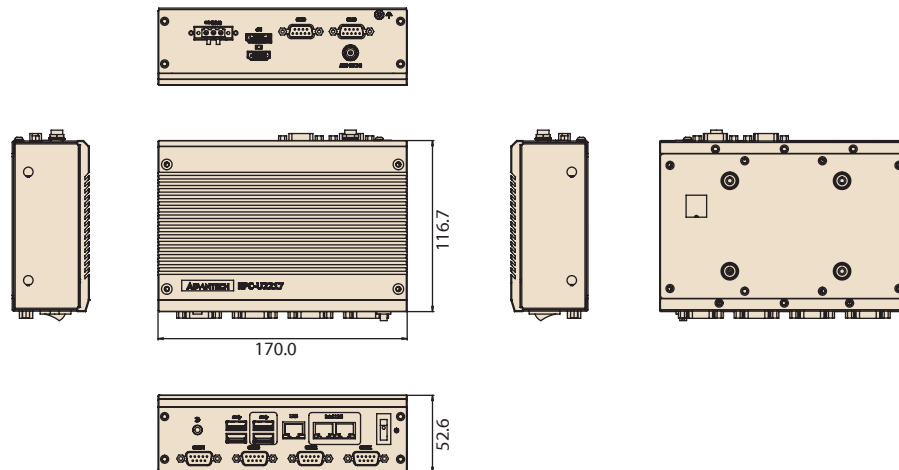

Front Panel External I/O Mechanical Layout/Drawing

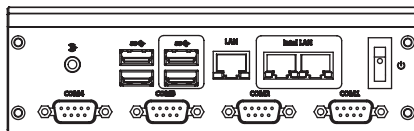

Rear Panel External I/O Mechanical Layout/Drawing

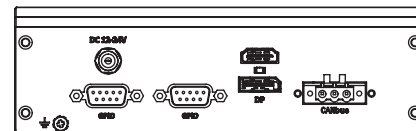

Ordering Information

P/N	Description	Memory	Storage		COM	LAN	TPM	Operating Temp
			eMMC	SATA				
EPC-U2217E4W-03Y20	Emb EPC-U2117 E3940 Full Function SKU	4 GB	64GB	NA	3 x RS-232, 1 x RS-485	3	TPM 2.0	-20 ~ 60 °C

Power Cord

Part Number	Description
1702002600	Power cable 3-pin 183 cm, USA type
1702002605	Power cable 3-pin 183 cm, Europe type
1700018704	Power cable 3-pin 183 cm, UK type
1700000237	Power cable 3-pin 183 cm, PSE type
1700000596	Power cable 3-pin 183 cm, CCC type
1700001714	Power cable 3-pin 183 cm, BSMI type

Mounting Kit

Part Number	Description	Note
EPC-BRKU-DR010	EPC-U2000 Din Rail mounting kit	Din Rail and VESA Mount

OS Information

OS Type	Part Number
Win10 IoT	20706WX9ES0040
Ubuntu 20.04	20706U20DS0006