


MIC-3332

3U CompactPCI Intel® 6th Gen. Quad-Core™ Processor Blade

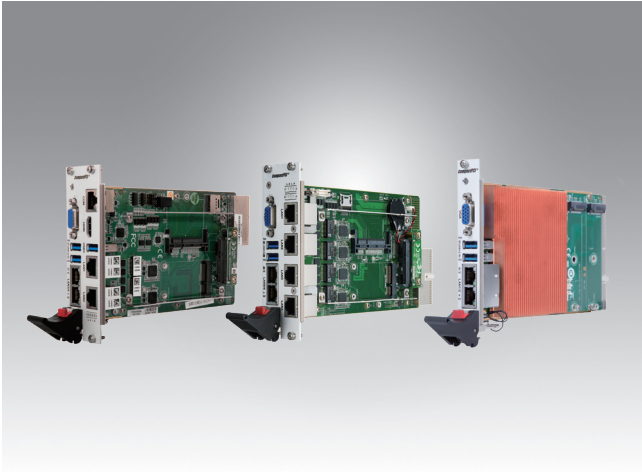

Features

- Intel® 6th Gen 14nm Xeon®/Core™ processor with CM236 PCH
- 8G DDR4-2133 soldered memory with ECC or Non-ECC
- Multi-option storage as 2.5" SATA, 2280 M.2, Cfast, Mirco SD, etc
- 2 RJ45 GbE LAN, 2 USB3.0, 1VGA on front 4HP panel
- 1 RJ45 COM, 1 HDMI, 1 USB3.0, 2 RJ45 GbE LAN on 8HP XTM-1 front panel
- 4 RJ45 GbE LAN on 8HP XTM-2 front panel
- Reserved 2 M12 X-code GbE LAN on XTM-1 front panel
- Reserved 4 M12 X-code GbE LAN on XTM-2 front panel
- Design to meet EN50121-4 & EN50155 for railway application
- PICMG2.0 R3.0, PICMG2.1 R2.0 Compliant

Compliant with
EN 50121-4

Compliant with
EN 50155

CE FCC

RoHS
COMPLIANT
PRODUCT

Introduction

Advantech MIC-3332 Series, using Intel® 14nm technology to provide significant performance and power efficiency.

MIC-3332 series, as a 3U CompactPCI® processor blade, is featured with a 4 cores/8 threads Core™ i7 Processors i7-6822EQ, i7-6820EQ, Xeon® Processor E3 v5 Family as E3-1505M v5 and E3-1505L v5, mating with Intel® CM236 platform Chipset Hub to support single channel 8GB soldered DDR4@2133MHz memory. The graphics controller is integrated in processor to offer up to three independent displays based on customer requests. It is available in single and dual slots width form factors, to offer various I/O connectivity by XTM (8HP), Rear IO extensions.

Front panel I/O on the single slot (4HP) provides 2xRJ45 GbE ports, 1xVGA port and 2xUSB3.0 port. Front Panel I/O on the 8HP XTM layer have multiple options: 8HP XTM-1 Board provides 1xRJ45 COM port, 1xHDMI display port, 1xUSB 3.0 port, 2xRJ45 GbE LAN ports (reserved 2xM12 X-code ports, co-lay with 2xRJ45 ports); 8HP XTM-2 Board provides 4xRJ45 GbE LAN ports (reserved 4xM12 X-code ports, co-lay with 4xRJ45). There are various types of storages on 8HP XTM Board: 1x2.5"SATA connector, 1xCfast socket on XTM-1 & XTM-2 Board; Additional 1xMicro-SD socket is on 8HP XTM-2 Board; 2x2280 M.2 style connectors are on XTM-3 Board.

MIC-3332 provides an ideal solution for railway rolling stock, high-performance computing and military application. With its optimized design on EMC & thermal, it is available to meet or exceed EN50155 and EN50121-4.

Specifications

Processor System	CPU	Intel® E3-1505LV5,4C/8T,2.0GHz, ECC, TDP 25W Intel® E3-1505MV5,4C/8T,2.8GHz, ECC, TDP 45W Intel® Core i7-6822EQ,4C/8T, 2.0GHz,w/o ECC, TDP 25W Intel® Core i7-6820EQ,4C/8T,2.8GHz,w/o ECC, TDP 45W
	BIOS	AMI Aptio UEFI BIOS
Memory	Technology	Single Channel DDR4@2133 MHz with ECC or Non-ECC
	Max. Capacity	8GB soldered on board memory
Compact PCI Interface	J1 Connectors	32bit PCI local bus
	J2 Connector	RTM
	Mode	System Master/Drone
Graphics	Chipset	Integrated in processor
	Resolution	VGA: 1920 x 1200 @ 60Hz; HDMI: 3840 x 2160 @ 30HZ
Ethernet	Controller	Intel® WGI210IT Gigabit Ethernet Controller
	Interface	PCIe 1.0 Gen2 x1, 10/100/1000 Base T Ethernet
	I/O Connector	2 x RJ45 GbE LAN port to 4HP front panel 2 x RJ45 GbE LAN ports on XTM-1 front panel (reserved 2 x M12 X-code, co-lay with 2 x RJ45) 4 x RJ45 GbE LAN ports on XTM-2 front panel (reserved 4 x M12 X-code, co-lay with 4 x RJ45)
Storage	Mode	SATAIII
	On board Connector	1 x on board 2.5" SATA connector & 1 x Cfast socket on XTM-1 & XTM-2 board 2 x on board 2280 M.2 connectors on XTM-3 board 2 x SATA available for RTM
	Mode	USB2.0
	On board Connector	1 x Micro SD socket on 8HP XTM-2 board

Specifications (Cont.)

Front I/O	USB	2 x USB3.0 on 4HP; 1x USB 3.0 on 8HP XTM-1 board
	VGA	1 x VGA
	HDMI	1 x HDMI on 8HP XTM-1 board
	COM	1 x RJ45 COM port default setting is RS232, RS422/485 could be set by the switch on 8HP XTM-1 board
	LAN	2 x RJ45 GbE LAN ports to 4HP 2 x RJ45 GbE LAN ports to 8HP XTM-1 4 x RJ45 GbE LAN ports to 8HP XTM-2
	Front Panel LEDs	1x blue/Orange for Hot Swap/HDD, 1x green for Power/Master/Drone mode
	Buttons	System reset button
RTM interface (4HP J2)	USB	4 x USB2.0
	SATA II	2 x SATA II
	LAN	2 x10/100/1000BASE-T Ethernet
	PCIe	2 x PCIe x 1 Gen 1; 1 x eDP(co-lay with 2 xPCIe x1)
Watchdog Timer	Output	Local reset & interrupt
	Interval	Programmable 1s ~ 255s 1s step, generate reset signal
Operating System	Compatibility	Windows10, Windows7, Ubuntu 18.04, Centos7.5, Vxworks 7.0
Physical	Dimensions (W x D)	4HP or 8HP, 160.00 x 100.00 mm (6.30" x 3.95")
Environment	Temperature	Operating -25~70 °C (-13 ~ 158 °F) Non-operating -40 ~ 85 °C (-40 ~ 185 °F)
	Humidity	95 % @ 40 °C, non-condensing 95 % @ 60 °C, non-condensing
	Vibration	2 Grms (with SSD and Cfast) 2Grms
	Shock	10 G, 11ms, each axis three times
	Regulatory	Conformance
Compliance	Standards	PICMG2.0 R3.0, PICMG2.1 R2.0 Compliance

Supported CPU Configurations

Intel® CPU Model Number	# Cores	Freq.	Smart Cache	Memory Types	CPU TDP
Intel® Core™ i7-6822EQ	4	2.0GHz	8 MB	DDR4-2133, Non-ECC	25W
Intel® Core™ i7-6820EQ	4	2.8GHz	8 MB	DDR4-2133, Non-ECC	45W
Intel® Xeon® E3-1505M v5	4	2.8GHz	8 MB	DDR4-2133, ECC	45W
Intel® Xeon® E3-1505L v5	4	2.0GHz	8 MB	DDR4-2133, ECC	25W

Ordering Information

Single board	Front Panel							Main On board Features						Others	
	4HP			8HP XTM				4HP		XTM (Conn./Socket/Pin head)					Slot Width
	LAN (RJ45)	USB 3.0	VGA	LAN (RJ45)	COM	HDMI	USB 3.0	CPU	Memory ⁽¹⁾	SATA Conn.	Cfast Socket	M.2 Conn.	Micro-SD Socket		
MIC-3332C1-D1E	2	2	1	4	-	-	-	i7-6822EQ	8GB	1	1	-	1	1	2
MIC-3332C4-D2E	2	2	1	2	1	1	1	i7-6822EQ	8GB	1	1	-	-	1	2
MIC-3332C1-S1E	2	2	1	-	-	-	-	i7-6822EQ	8GB	-	-	2	-	1	1


Notes: 1. Intel® Xeon® E3-1505L v5 and E3-1505M v5 with ECC support per request
2. COM pin head default setting is RS232, RS422/485 could be set by the switch on 8HP XTM-1 board

Related Products


Peripheral board	Description
MIC-3955	3U CPCI 4 or 8-port RS232/422/485 communication card, with RIO support
MIC-3958	3U CPCI 4/2 port RJ45 or M12 X-code Gigabit Ethernet Card, with RIO support
MIC-3022	4U enclosure for 3U cards, with RIO and FAN support
MIC-3023	3U enclosure for 3U cards, with RIO and FAN support

Storage/IO


MIC-3332C4-D2E

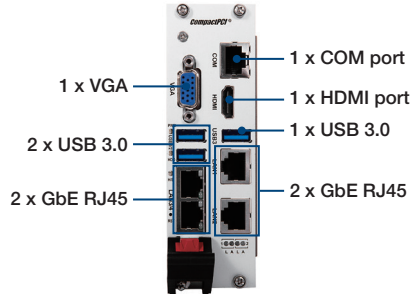


MIC-3332C1-D1E



MIC-3332C1-S1E




MIC-3332C1-S1E

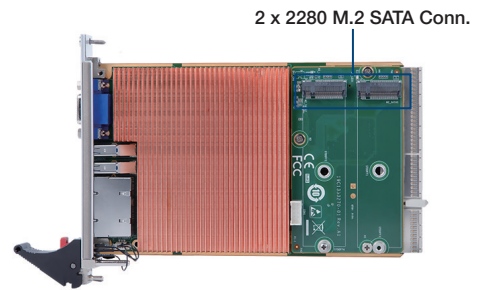

MIC-3332 series Storage functions

MIC-3332C4-D2E

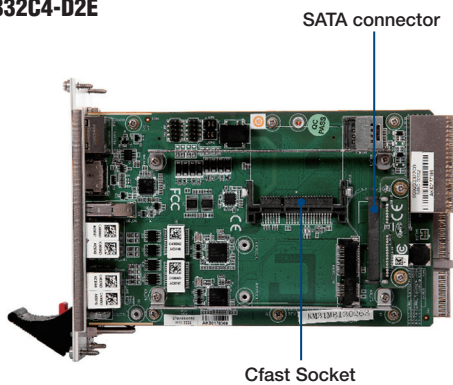

MIC-3332C1-D1E

